

# Reliability Test Report

<b>Product Name:</b>	<b><u>M61 Series</u></b>
<b>Product Model:</b>	<b><u>Ai-M61-32S</u></b>
<b>Test Date:</b>	<b>2024.01.04-2024.01.12</b>
<b>Tested by:</b>	<b>Kang Penghui</b>
<b>Reviewed by:</b>	<b>An Sanchao</b>

## 1. Inspection Standard

No.	Process Name	Inspection Item	Inspection Equipment	Sampling Level (Refer to GB/T 2828.1-2012)	Acceptable Quality Level		
					CR (Critical Defect)	MA (Major Defect)	MI (Minor Defect)
1	Reliability test	High/low temperature storage; high/room/low temperature power on/off; high/low temperature operation; alternating hot and humid; thermal shock	Constant temperature and humidity chamber	Normal single sampling, special inspection S-1	0 accept, 1 reject		

## 2. Test Items

No.	Item	Test Conditions
1	Low temperature storage test	Test conditions: -40°C Test duration: 8h After a 1-hour soak at -40°C, perform a cold start test.
2	High temperature storage test	Test conditions: 100°C + 93% RH Test duration: 8h After restoring to 85°C and a 1-hour soak, perform a hot start test.
3	Low temperature operation test	Test conditions: -40°C Test duration: 24h
4	High temperature operation test	Test conditions: 85°C + 93% RH Test duration: 24h
5	AC power on/off test with temperature	A) Temperature: -40°C B) Temperature: 25°C + 93% RH C) Temperature: 85°C + 93% RH Cycle each condition 200 times, with 30s ON and 30s OFF.
6	Alternating hot and humid test	A) Operate at 85°C + 93% RH for 4h; B) Operate at 25°C + 93% RH for 4h; Cycle steps A and B for a total of 2 cycles.
7	Thermal shock test	Test conditions: -40°C–100°C + 93% RH, soak for 30min at each temperature Temperature transition time: 50min for heating, 2h for cooling Test duration: 5 cycles

### 3. Test Preparation


No.	Item	Image/Attachment
1	Reliability documentation	Refer to the M61 series reliability documentation
2	Test equipment	
3	Sample placement	
4	Test reason	Reliability test for new product pilot production

# 4.Low Temperature Storage Test

**Test Conditions:** Power-off test. Store the product at -40°C for 8h, then perform a cold start test.

**Test Profile:**

Is Power Off ——  
Is Power On ——

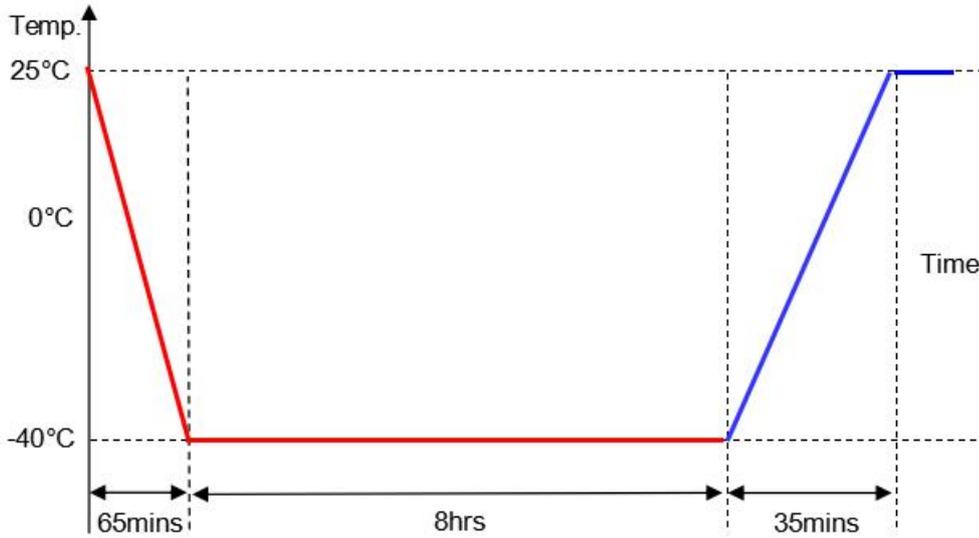

**Test Criteria:**

1. During the cold start test, the module functions normally. After the module is properly connected, power on the module and start the test by sending commands. If no packet loss is observed in the receiver log, the module is considered to be functional.
2. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.


Sample Quantity	Test Data	Test Results
6PCS	<p>The screenshots show the ATTKPPING software interface with the following summary statistics:</p> <ul style="list-style-type: none"> <li><b>Sample 1:</b> 2149 packets sent, 0 lost, 1.69s average ping, 100% success rate.</li> <li><b>Sample 2:</b> 2105 packets sent, 0 lost, 1.64s average ping, 100% success rate.</li> <li><b>Sample 3:</b> 2283 packets sent, 0 lost, 1.50s average ping, 100% success rate.</li> </ul>	PASS

## 5.High Temperature Storage Test

**Test Conditions:** Power-off test. Store the product at 100°C + 93% RH for 8h, then restore it to 85°C + 93% RH for a 1-hour soak, and perform a hot start test.

**Test Profile:**

**Is Power Off** ——  
**Is Power On** ——

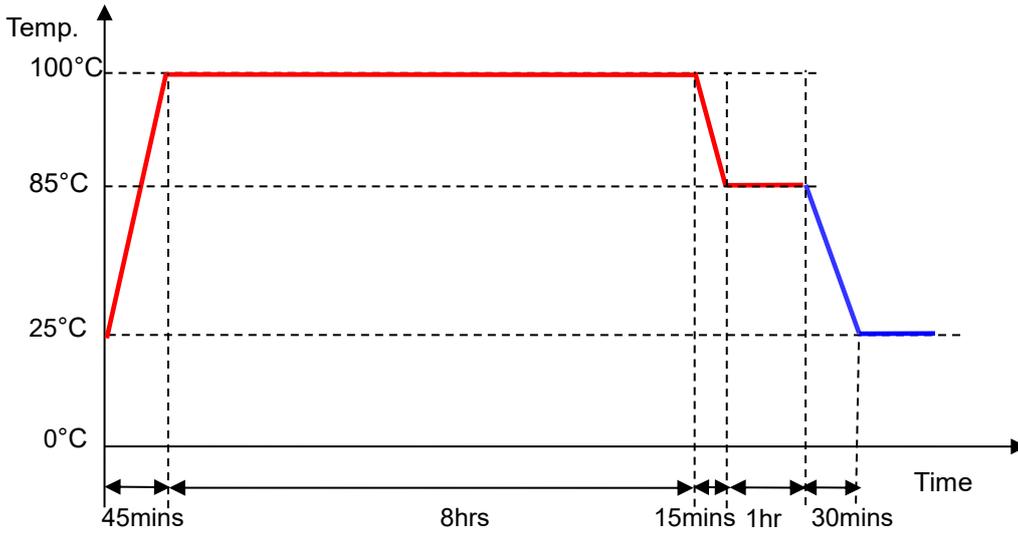

**Test Criteria:**

1. During the hot start test, the module functions normally. If no packet loss is observed in the receiver log, the module is considered to be functional.
2. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.


Sample Quantity	Test Data	Test Results
6PCS		PASS

## 6.Low Temperature Operation Test

Test Conditions: Power-on test. Operate at -40°C for 24h.

Test Profile:

Is Power Off ———  
Is Power On ———

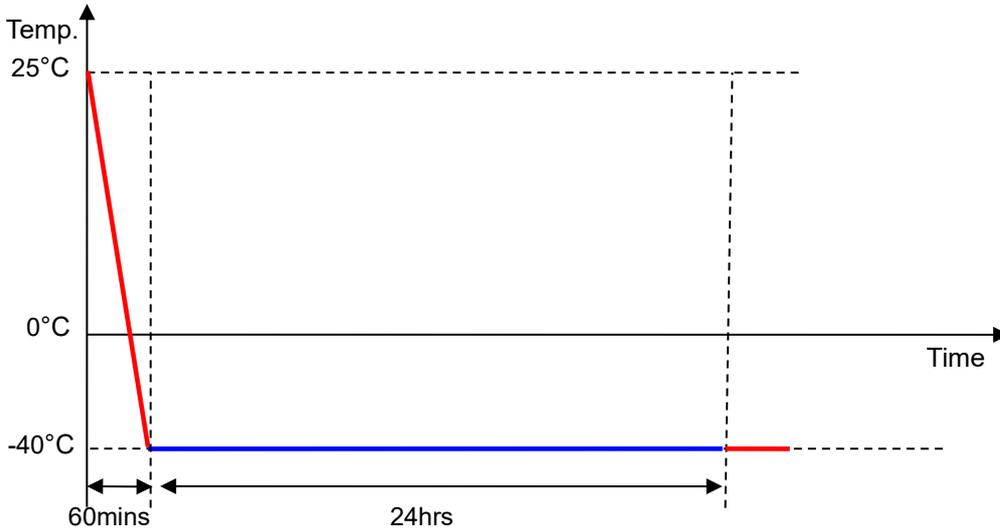

### Test Criteria:

1. After the module is properly connected, power on the module and start the test by sending commands. If no packet loss is observed in the receiver log, the module is considered to be functional.
2. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.


Sample Quantity	Test Data	Test Results
6PCS	<p>The screenshot displays six instances of the AT+KPPING command execution interface. Each instance shows a successful ping to the target IP (192.168.199.x) with a response time of 1ms. The statistics section for each ping shows a packet loss rate of 0.00% and a ping average of 2.64ms. The logs also show the raw data received from the server, including IP addresses and TTL values.</p>	PASS

# 7.High Temperature Operation Test

Test Conditions: Power-on test. Operate at 85°C+ 93% RH for 24h.

Test Profile:

Is Power Off \_\_\_\_\_  
 Is Power On \_\_\_\_\_

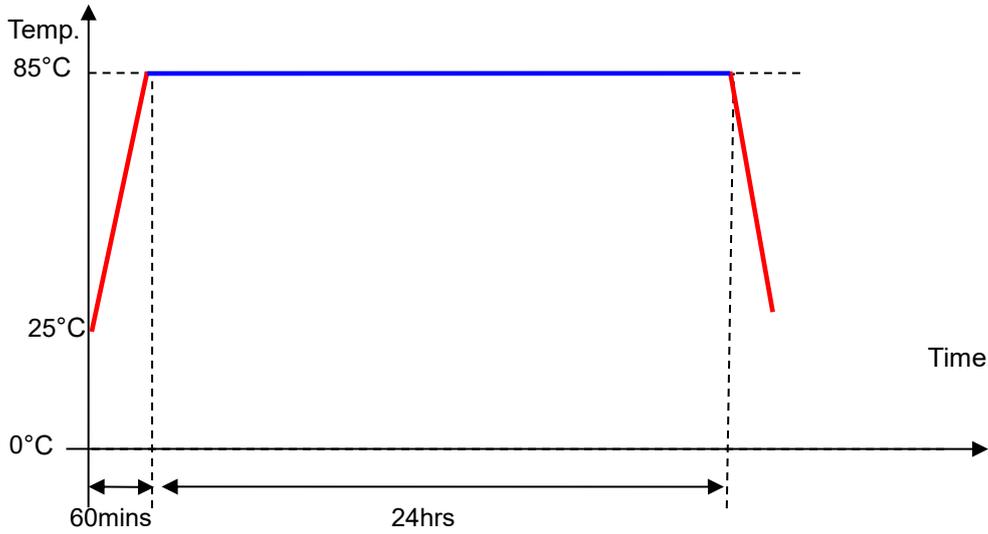

## Test Criteria:


1. After the module is properly connected, power on the module and start the test by sending commands. If no packet loss is observed in the receiver log, the module is considered to be functional.
2. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.

Sample Quantity	Test Data	Test Results
6PCS		PASS

# 8.AC Power On/Off Test with Temperature

- Test Conditions:**
1. Power on: 30s; power off: 30s.
  2. Temperature: -40°C, 25°C + 93% RH, 85°C + 93% RH.
  3. Cycle: Each test condition cycles 200 times.


**Test Profile:**

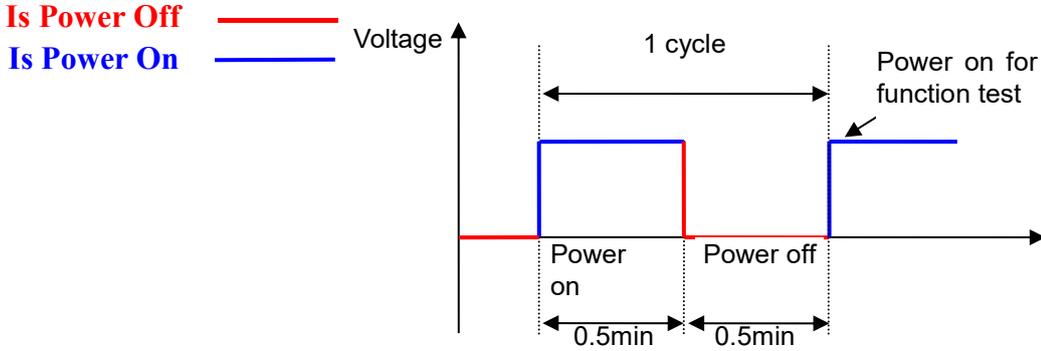

**Test Criteria:**

1. After the module is properly connected, power on the module and start the test by sending commands. If no packet loss is observed in the receiver log, the module is considered to be functional.
2. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.

Item	Sample Quantity	Test Data	Test Results
Power on/off at room temperature	6PCS		PASS
Power on/off at low temperature	6PCS		PASS
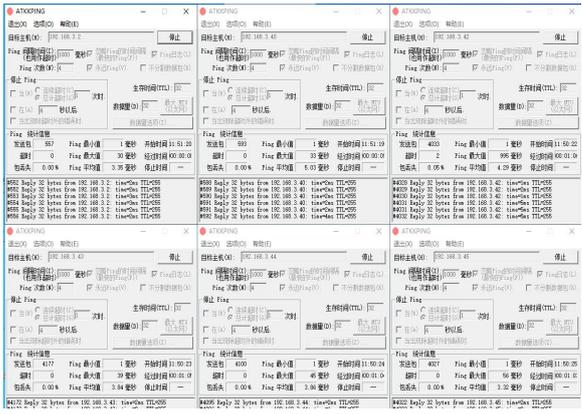
<p>Power on/off at high temperature</p>	<p>6PCS</p>		<p>PASS</p>
---	-------------	--	-------------


### 9. Alternating Hot and Humid Test

**Test Conditions:**

- 1. Operate at 85°C + 93% RH for 4h;
- 2. Operate at 25°C + 93% RH for 4h;
- Cycle step 1 and step 2, a total of 2 cycles.

**Test Profile:**


Is Power Off ——— (Red line)  
 Is Power On ——— (Blue line)

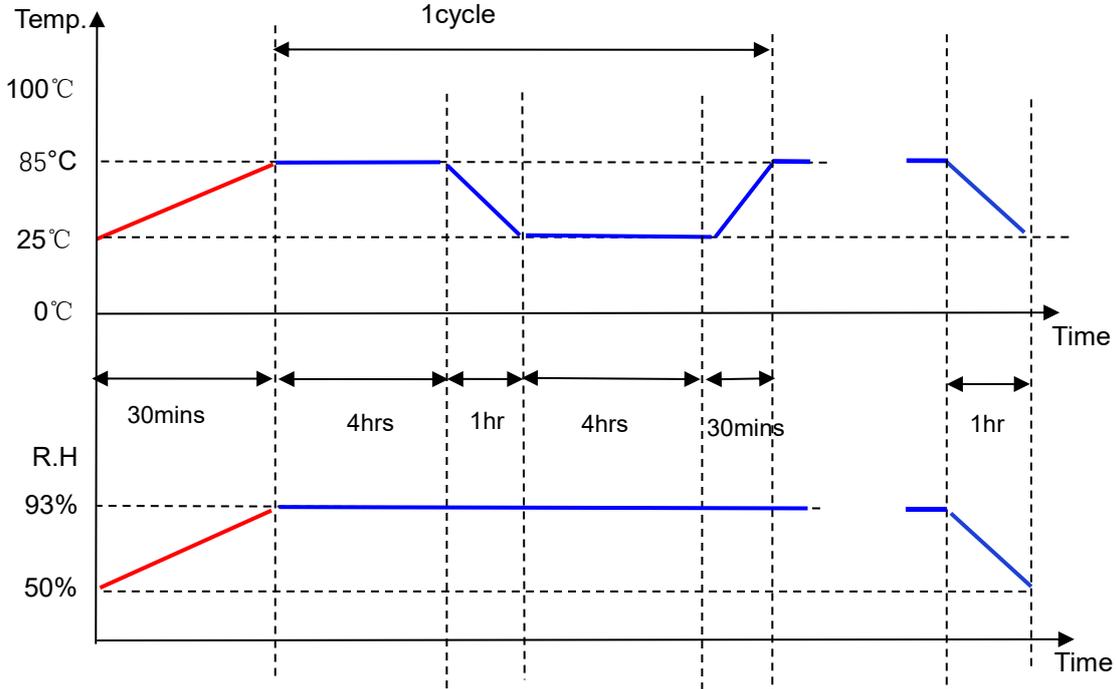

**Test Criteria:**

- 1. After the module is properly connected, power on the module and start the test by sending commands. If no packet loss is observed in the receiver log, the module is considered to be functional.
- 2. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.

Sample Quantity	Test Data	Test Results
-----------------	-----------	--------------

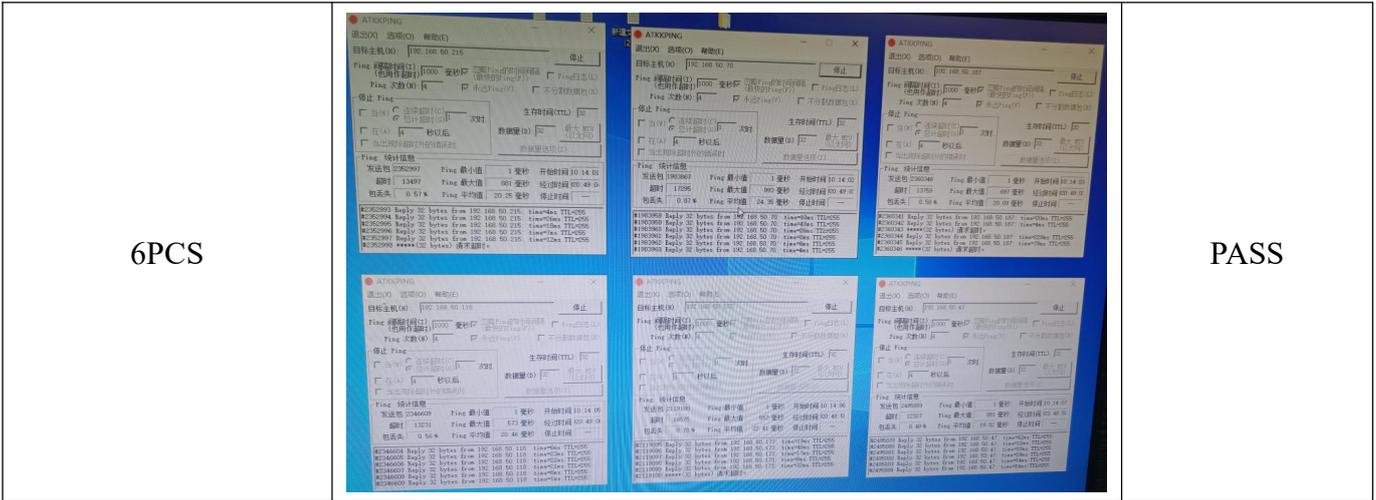


## 10. Thermal Shock Test

### Test Conditions:

Power-off test. Temperature cycling between -40–100°C + 93% RH, with a heating time of 50min and a cooling time of 2h. Each stage is held for 30min, for a total of 5 cycles.

### Test Profile:

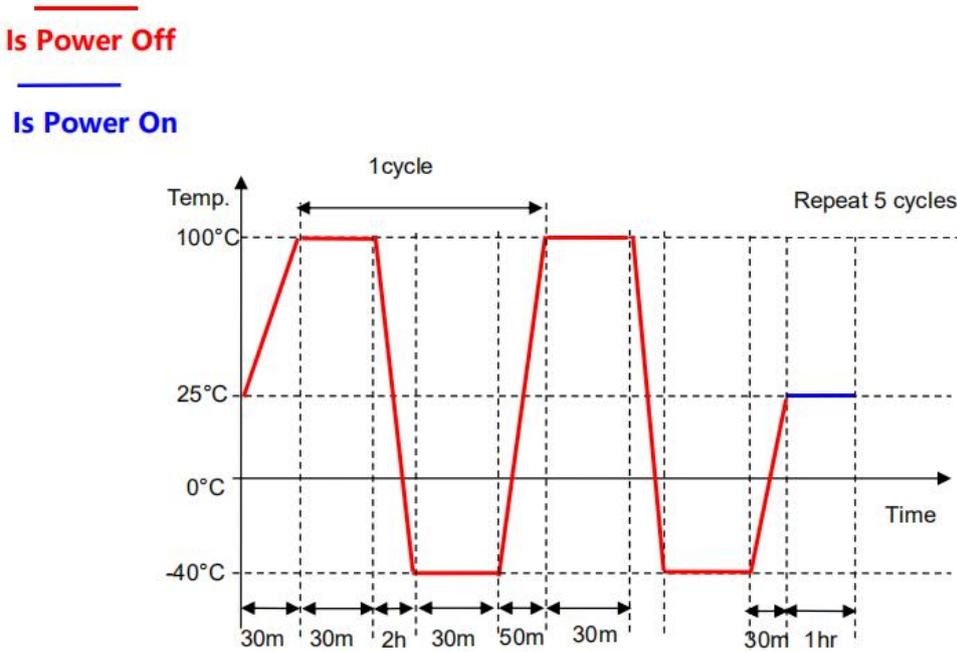

### Test Criteria:

1. After the module is properly connected, power on the module and start the test by sending commands. If no packet loss is observed in the receiver log, the module is considered to be functional.
2. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.

Sample Quantity	Test Data	Test Results
-----------------	-----------	--------------

6PCS



PASS