



# Ai-BS21-32S Specification

Version V1.1.0

Copyright ©2024

## Document resume

[illegible]

## Content

|                                             |    |
|---------------------------------------------|----|
| 1. Product Overview .....                   | 4  |
| 1.1. Characteristic .....                   | 5  |
| 2. Main parameters .....                    | 6  |
| 2.1. Electrostatic requirements .....       | 6  |
| 2.2. Electrical characteristics .....       | 7  |
| 2.3. Bluetooth RF performance .....         | 7  |
| 2.4. RF performance of SLE .....            | 8  |
| 3. Appearance size .....                    | 9  |
| 4. Pin definition .....                     | 10 |
| 5. Schematic diagram .....                  | 12 |
| 6. Antenna parameters .....                 | 13 |
| 6.1. Antenna Test conditions .....          | 13 |
| 6.2. Antenna S parameters .....             | 13 |
| 6.3. Antenna gain and efficiency .....      | 14 |
| 6.4. Antenna Field pattern diagram .....    | 14 |
| 7. Design Guide .....                       | 15 |
| 7.1. Module application guide circuit ..... | 15 |
| 7.2. Recommend PCB package size .....       | 16 |
| 7.3. Antenna layout requirements .....      | 16 |
| 7.4. Power supply .....                     | 17 |
| 7.5. GPIO .....                             | 17 |
| 8. Storage Conditions .....                 | 18 |
| 9. Reflow soldering curve .....             | 18 |
| 10. Product packaging information .....     | 19 |
| 11. Contact us .....                        | 19 |
| Disclaimer and copyright notice .....       | 20 |
| Notice .....                                | 20 |
| Statement .....                             | 21 |

## 1. Product Overview

Ai-BS21-32S is a Bluetooth star flash module developed by Shenzhen Ai-Thinker Technology Co., Ltd. The core processor chip Hi2821 of this module is a highly integrated 2.4GHz SoC BLE & SLE chip, which supports BLE5.4/SLE1.0 and integrated RF circuits. RF includes power amplifier PA, low noise amplifier, TX/RX Switch, integrated power management and other modules, supports 3 Bandwidths of 1M/2M/4M, and supports a maximum speed of 12Mbit/s.

Hi2821 chip integrates high-performance 32-bit microprocessor (MCU), hardware security engine and rich peripheral interfaces. Peripheral interfaces include SPI, UART, I2S, PMW, GPIO, USB2.0, NFC Tag, PDM, I2S/PCM, QDEC, KEYSCAN keyboard scanning circuits, and supports 8 channels of 13-bit resolution ADC. ADC supports docking audio equipments, built-in SRAM and sealed Flash, and supports running.

Hi2821 supports LiteOS and provides an open and easy-to-use development and debugging environment.

Hi2821 is suitable for PC accessories, IoT and other IoT smart terminal fields.

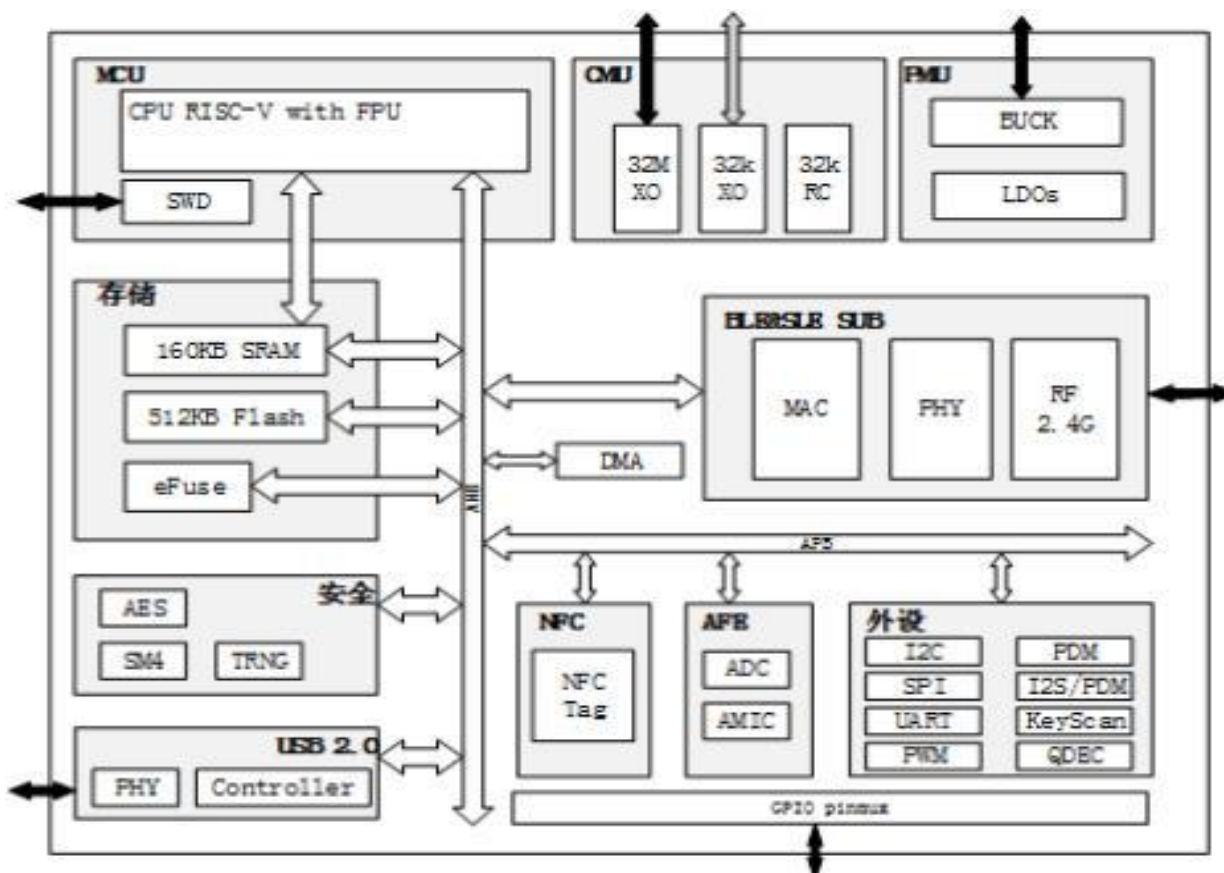


Figure 1 Architecture diagram of main chip

## 1.1. Characteristic

- Dual-mode coexistence of BLE and SLE is supported
- BLE5.4
- Supports LE 1M, LE 2M, and Long Range
- RISC-V high-performance 32-bit CPU with a maximum clock frequency of 64MHz, floating point and SWD
- Supports SRAM 160kB and built-in 1MB Flash
- Supported Encryption methods: AES( Advanced Encryption Standard), SM4, and TRNG(True Random Number Generator)
- Supported peripheral interfaces include: SPI, UART, I2C, PMW, GPIO, USB2.0, NFC Tag, PDM, I2S/PCM, QDEC, KEYSCAN, etc
- Supports the BLE whitelist and can be resolved
- HID man-machine interface
- Supports the BLE service gap sweep function
- Support for BLEAFH frequency modulation
- Supports SLE1.0 protocol, wireless frame type 1(GFSK frame) and wireless frame type 2 (low latency frame), G frame and T frame, broadcast, discovery and access function, Unicast function, multicast function, high precision ranging
- Supports B/SLE and WLAN, 3/4 lines of off-chip coexistence (high real-time)
- Supports B/SLE and WLAN, and coexists through UART (low real-time)

## 2. Main parameters

**Table 1 Description of main parameters**

|                              |                                                                                 |
|------------------------------|---------------------------------------------------------------------------------|
| <b>Model</b>                 | Ai-BS21-32S                                                                     |
| <b>Package</b>               | SMD-38                                                                          |
| <b>Size</b>                  | 25.5*18*3.1 (± 0. 2) mm                                                         |
| <b>Antenna</b>               | On-board antenna/IPEX                                                           |
| <b>Frequency</b>             | 2400~2483.5MHz                                                                  |
| <b>Operating temperature</b> | -40°C ~ 85°C                                                                    |
| <b>Storage temperature</b>   | -40 °C ~ 125 °C, <90% RH                                                        |
| <b>Power supply</b>          | Power supply voltage 1.8V ~ 3.6V, power supply current>500mA                    |
| <b>Interface</b>             | SPI/UART/I2C/PMW/GPIO/USB2.0/NFCTag/PDM/I2S/PCM/QDEC/KEYSCAN                    |
| <b>IO</b>                    | 29                                                                              |
| <b>UART rate</b>             | Default 115200 bps                                                              |
| <b>Bluetooth</b>             | BLE 5.4                                                                         |
| <b>Security</b>              | AES( Advanced Encryption Standard), SM4 and TRNG(True Random Number Generator). |
| <b>SPI Flash</b>             | Built-in 1MB Flash                                                              |

### 2.1. Electrostatic requirements

Ai-BS21-32S are electrostatic sensitive equipment, special preventive measures should be taken during handling.



**Figure 2 ESD anti-static diagram**

## 2.2. Electrical characteristics

**Table 2 Electrical Characteristics Table**

| Parameter      |                                  | Condition | Min.                    | Typical value | Max.                               | Unit |
|----------------|----------------------------------|-----------|-------------------------|---------------|------------------------------------|------|
| Supply voltage |                                  | VDD       | 1.8                     | 3.3           | 3.6                                | V    |
| I/O            | V <sub>IL</sub> /V <sub>IH</sub> | -         | -0.3/0.75V <sub>D</sub> | -             | 0.25V <sub>D</sub> /V <sub>D</sub> | V    |
|                | V <sub>OL</sub> /V <sub>OH</sub> | -         | N/0.8V <sub>I</sub>     | -             | 0.1V <sub>I</sub> /N               | V    |
|                | I <sub>MAX</sub>                 | -         | -                       | -             | 12                                 | mA   |

## 2.3. Bluetooth RF performance

**Table 3 Bluetooth RF performance table**


| Description           | Typical value |               |      | Unit |
|-----------------------|---------------|---------------|------|------|
| Operating frequency   | 2400~2483.5   |               |      | MHz  |
| Output power          |               |               |      |      |
| Mode                  | Min.          | Typical value | Max. | Unit |
| BLE 2Mbps             | -             | 6             | -    | dBm  |
| BLE 1Mbps             | -             | 6             | -    | dBm  |
| Long Range            | -             | 6             | -    | dBm  |
| Receiving sensitivity |               |               |      |      |
| Mode                  | Min.          | Typical value | Max. | Unit |
| BLE 2Mbps             | -             | -94           | -    | dBm  |
| BLE 1Mbps             | -             | -97           | -    | dBm  |
| BLE 125Kbps           | -             | -103          | -    | dBm  |

## 2.4. RF performance of SLE


**Table 4 SLE RF performance table**

| Description                                     | Typical value |               |      | Unit |
|-------------------------------------------------|---------------|---------------|------|------|
| Operating frequency                             | 2400~2483.5   |               |      | MHz  |
| Output power                                    |               |               |      |      |
| Mode                                            | Min.          | Typical value | Max. | Unit |
| SLE Tx Power (wireless frame type 1) normal     | -             | 6             | -    | dBm  |
| SLE Tx Power (wireless frame type 2) normal     | -             | 2             | -    | dBm  |
| SLE Tx Power (wireless frame type 1) high power | -             | 8             | -    | dBm  |
| SLE Tx Power (wireless frame type 2) high power | -             | 4             | -    | dBm  |
| Receiving sensitivity                           |               |               |      |      |
| Mode                                            | Min.          | Typical value | Max. | Unit |
| SLE 2MGFSK rate1                                | -             | -93           | -    | dBm  |
| SLE 2MQPSK rate3/4                              | -             | -95           | -    | dBm  |
| SLE 2M8PSK rate3/4                              | -             | -90           | -    | dBm  |
| SLE 4MGFSK rate1                                | -             | -90           | -    | dBm  |
| SLE 4MQPSK rate3/4                              | -             | -92           | -    | dBm  |

### 3. Appearance size

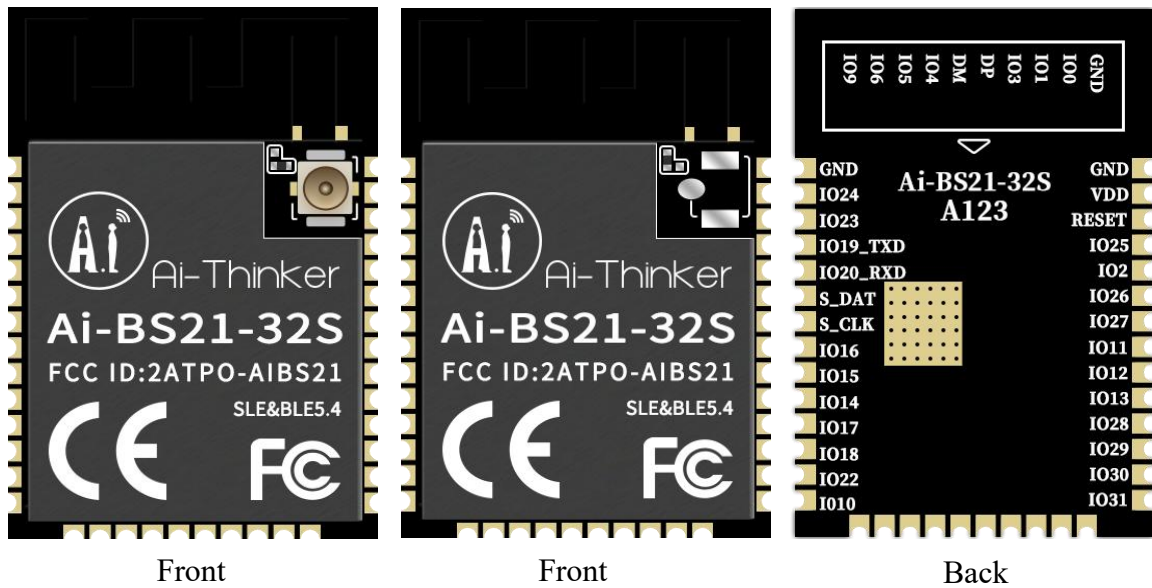

**Figure 3** External view of the module (for reference only, subject to the actual object)

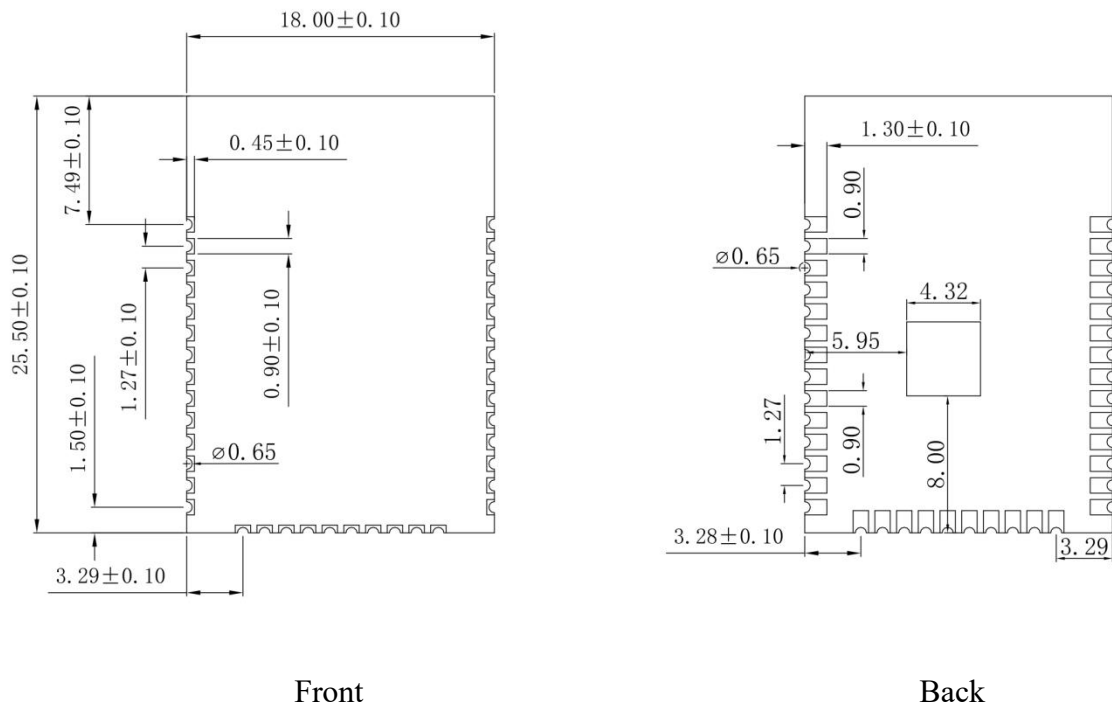

**Figure 4** Module size diagram

## 4. Pin definition

Ai-BS21-32S module connects 38 pins, for example, the pin function definition table is the interface definition.

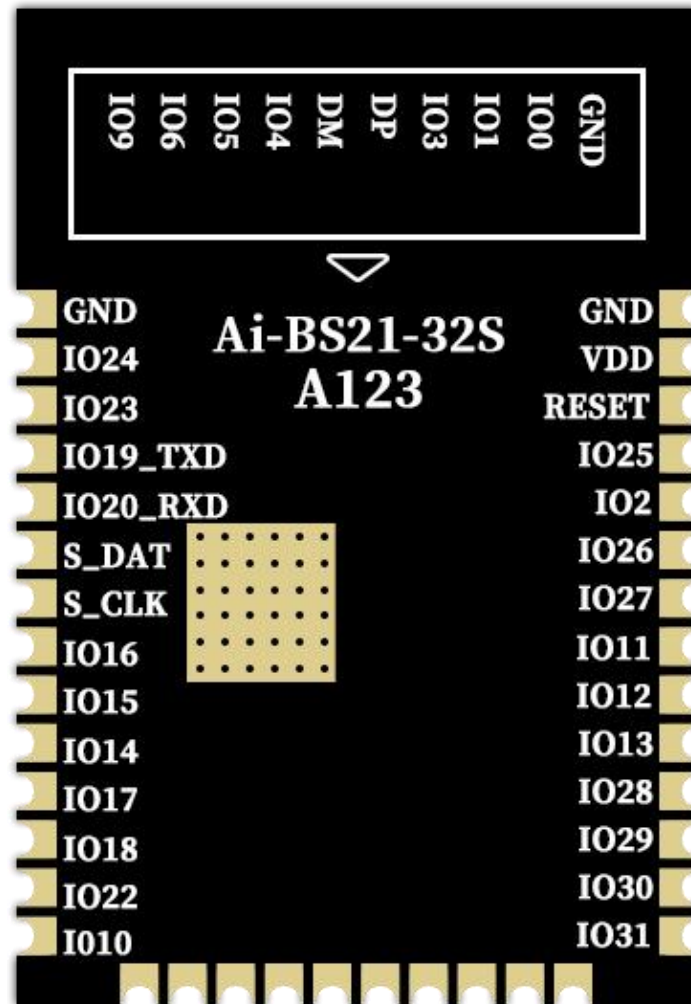



Figure 5 Schematic diagram of module pin (bottom view)

Table 5 Definition table of pin functions

| No.     | Name  | Description                                 |
|---------|-------|---------------------------------------------|
| 1,15,38 | GND   | Negative pole of grounding power supply     |
| 2       | VDD   | Power supply, positive pole of power supply |
| 3       | RESET | RESET/GPIO21/UART_H0_CTS/EXTLNA_RX_EN       |
| 4       | IO25  | GPIO25/O32M/I2C0_CLK/RESERVED               |
| 5       | IO2   | GPIO2/AIN0/SPI0_TXD/DMIC_CLK/RESERVED       |
| 6       | IO26  | GPIO26/I2C0_DATA/BT_WIFI_SW                 |
| 7       | IO27  | GPIO27/I2C1_CLK/BT_WIFI_SW                  |

|    |       |                                           |
|----|-------|-------------------------------------------|
| 8  | IO11  | GPIO11/high speed SPI_TXD/SPI2_TXD/PWM4   |
| 9  | IO12  | GPIO12/high speed SPI_RXD/SPI2_CS0/PWM5   |
| 10 | IO13  | GPIO13/high speed SPI_CS/SPI2_CS1/PWM6    |
| 11 | IO28  | GPIO28/AIN4/I2C1_DATA/RESERVED            |
| 12 | IO29  | GPIO29/AIN5/QDEC_A/BT_STATUS              |
| 13 | IO30  | GPIO30/AIN6/QDEC_B/RESERVED               |
| 14 | IO31  | GPIO31/AIN7/LED_OUT/RESERVED              |
| 16 | IO0   | GPIO0/XL1/SPI0_RXD/DMIC_DIN/EXTLNA_CTRL   |
| 17 | IO1   | GPIO1/XL2/SPI0_TXD/DMIC_CLK/RESERVED      |
| 18 | IO3   | GPIO3/AIN1/SPI0_CS0/I2S_SCLK/RESERVED     |
| 19 | DP    | USB_DP                                    |
| 20 | DM    | USB_DM                                    |
| 21 | IO4   | GPIO4/AIN2/SPI0_CS1/I2S_DOUT/BT_FEM_TX_EN |
| 22 | IO5   | GPIO5/AIN3/SPI1_RXD/I2S_DIN/RESERVED      |
| 23 | IO6   | GPIO6/SPI1_TXD/I2S_MCLK                   |
| 24 | IO9   | GPIO9/NFC1/SPI1_CLK/PWM2                  |
| 25 | IO10  | GPIO10/NFC2/SPI2_RXD/PWM3                 |
| 26 | IO22  | GPIO22/UART_H0_RX_D/BT_FREQ               |
| 27 | IO18  | GPIO18/UART_L1_TXD/PWM11                  |
| 28 | IO17  | GPIO17/UART_L1_RTS/PWM10                  |
| 29 | IO14  | GPIO14/high speed SPI_CLK/SPI2_CLK/PWM7   |
| 30 | IO15  | GPIO15/UART_L0_RXD/PWM8                   |
| 31 | IO16  | GPIO16/UART_L0_TXD/PWM9                   |
| 32 | S_CLK | SWD_CLK                                   |
| 33 | S_DAT | SWD_DAT                                   |
| 34 | RXD   | GPIO20/UART_L1_RXD/PLUSE_CAPTURE          |
| 35 | TXD   | GPIO19/UART_L1_CTS/KEY_SCAN_BIR[0:31]     |
| 36 | IO23  | GPIO23/UART_H0_RXD/BT_FREQ                |
| 37 | IO24  | GPIO24/UART_H0_TXD/WLAN_ACTIVE            |

## 5. Schematic diagram

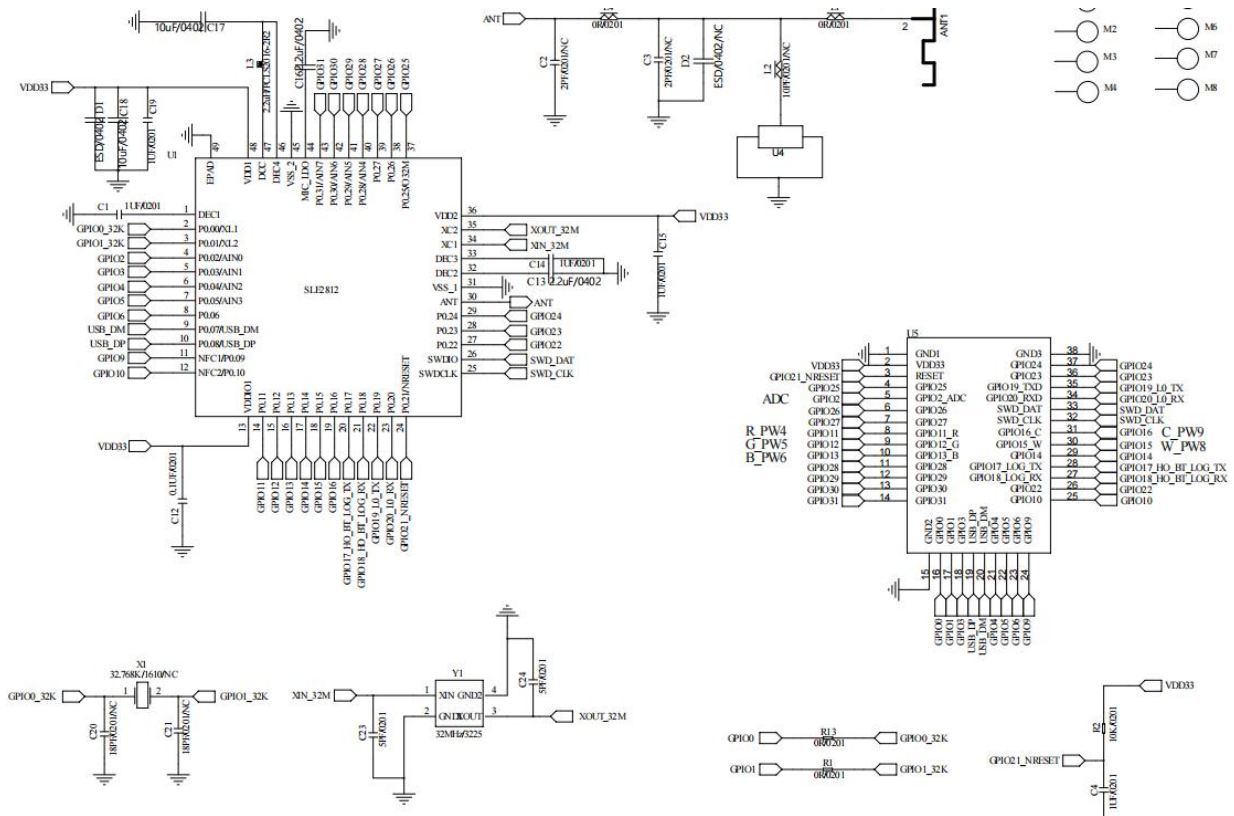

**Figure 6 Schematic diagram of the module**

## 6. Antenna parameters

### 6.1. Antenna Test conditions

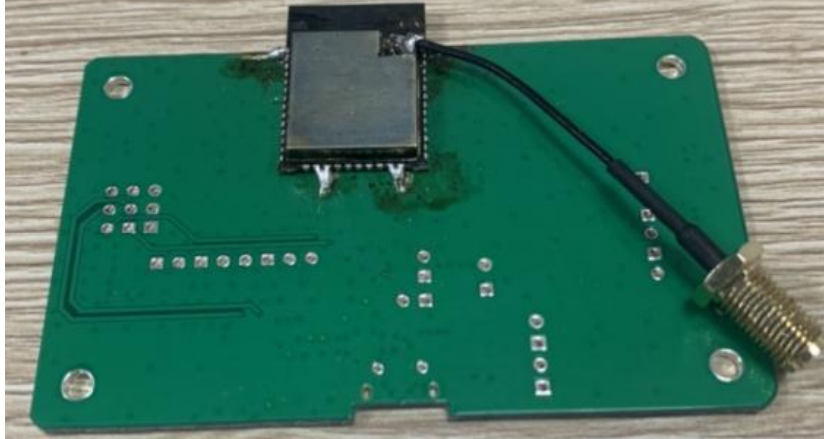


Figure 7 Antenna test conditions

### 6.2. Antenna S parameters

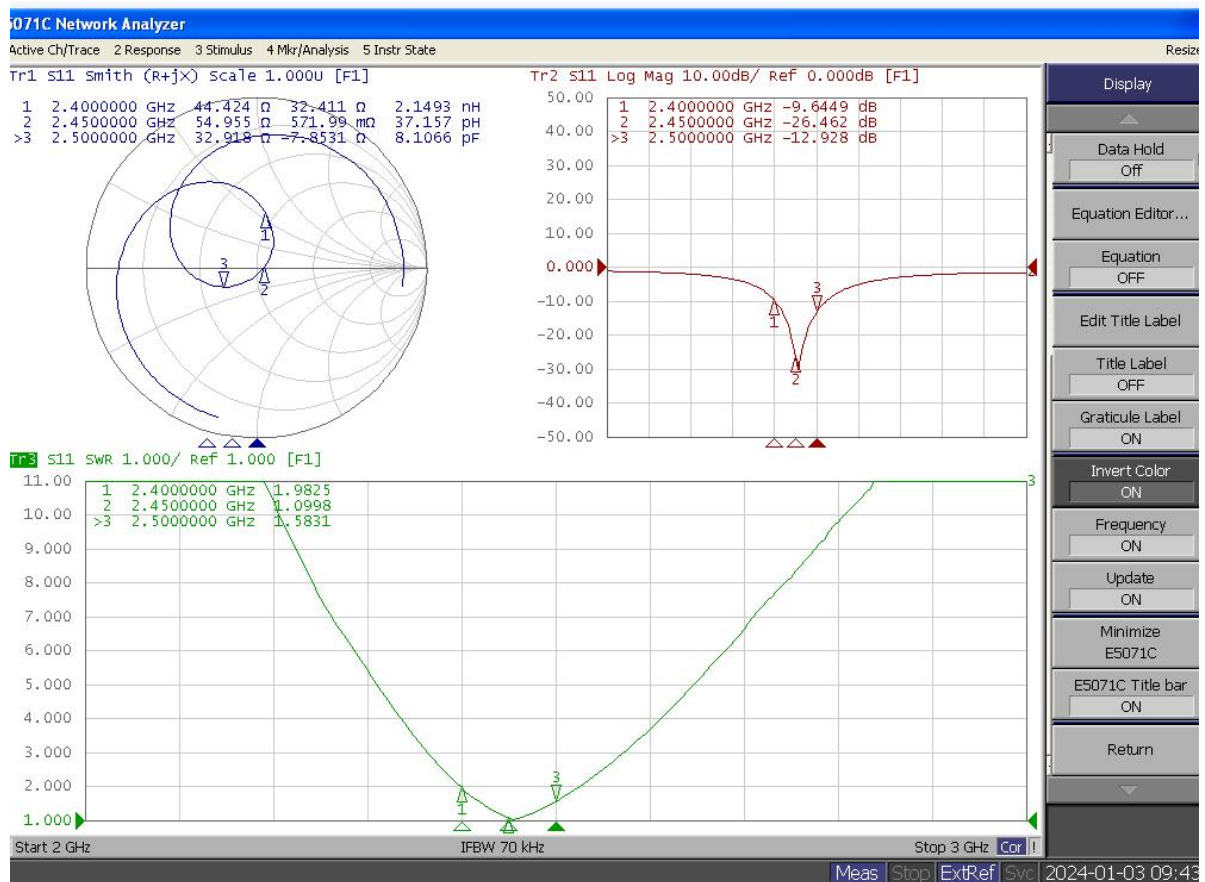


Figure 8 Antenna S parameters

## 6.3. Antenna gain and efficiency

Table 6 Antenna gain and efficiency

| Frequency ID    | 1      | 2      | 3      | 4      | 5      | 6      | 7      | 8      | 9      | 10     | 11     |
|-----------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Frequency (MHz) | 2400.0 | 2410.0 | 2420.0 | 2430.0 | 2440.0 | 2450.0 | 2460.0 | 2470.0 | 2480.0 | 2490.0 | 2500.0 |
| Gain (dBi)      | 0.64   | 0.60   | 0.71   | 0.85   | 1.04   | 1.15   | 1.21   | 1.29   | 1.38   | 1.22   | 1.10   |
| Efficiency (%)  | 52.96  | 54.45  | 56.50  | 58.94  | 60.49  | 61.96  | 62.80  | 62.55  | 61.61  | 58.48  | 57.67  |

## 6.4. Antenna Field pattern diagram


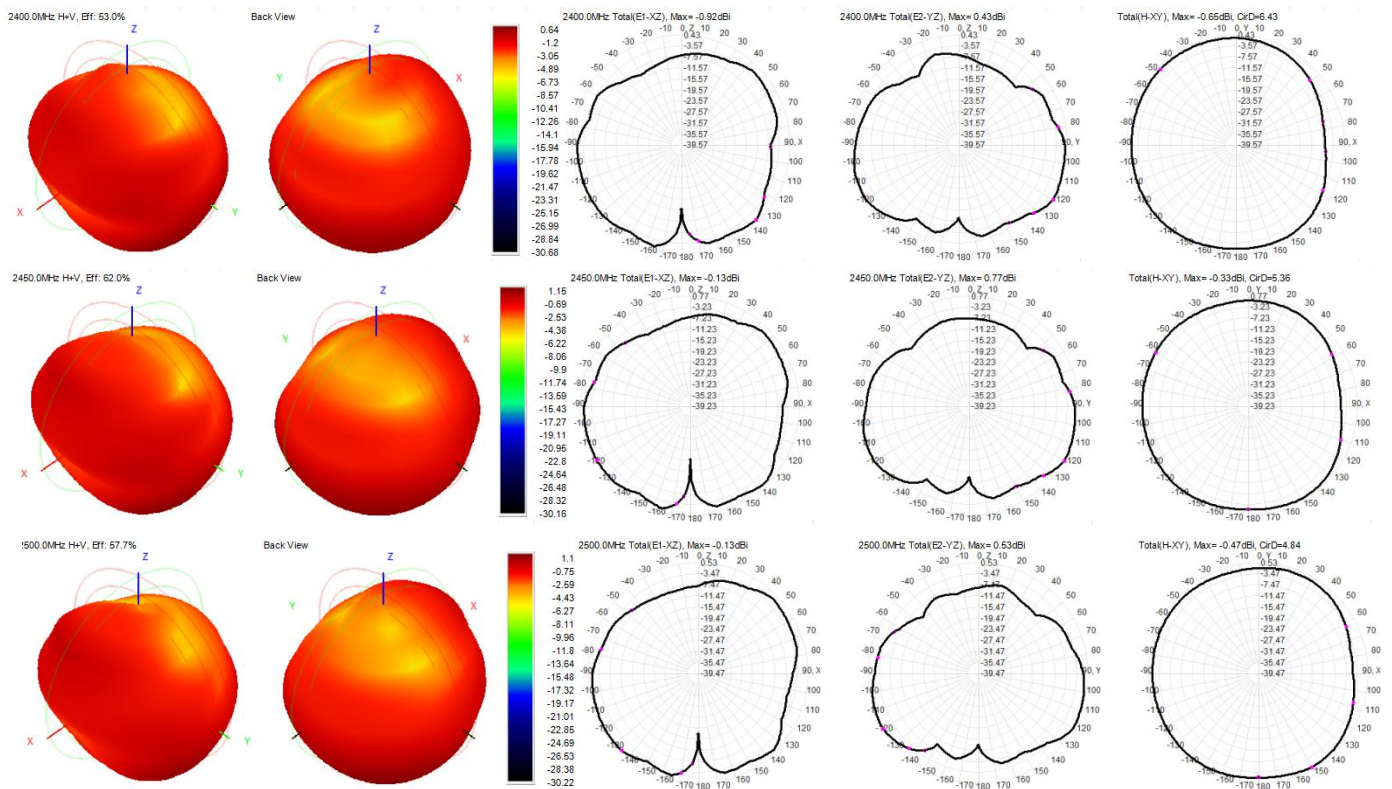


Figure 9 Antenna field type diagram

## 7. Design Guide

### 7.1. Module application guide circuit

(>= 200mA, it is recommended to use DC-DC or LDO for independent power supply)

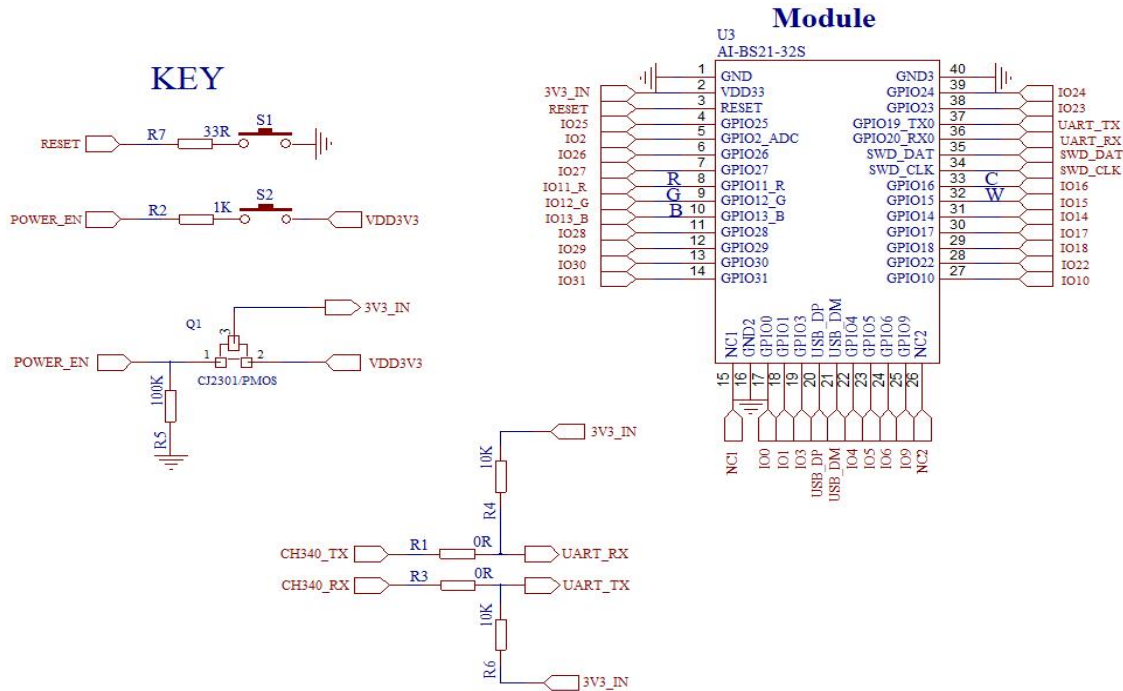


**Figure 10 Application circuit diagram**

Note:

- The Ai-BS21-32S can be reset through the RESET pin, and can also be reset by power-off. A PMOS can be used at the power input to realize the power-off action to reset the module.
- On the TX & RX serial line, two resistances are reserved and connected in series. It is used to prevent the 3.3V voltage of the serial port from affecting the reset of the module.

## 7.2. Recommend PCB package size

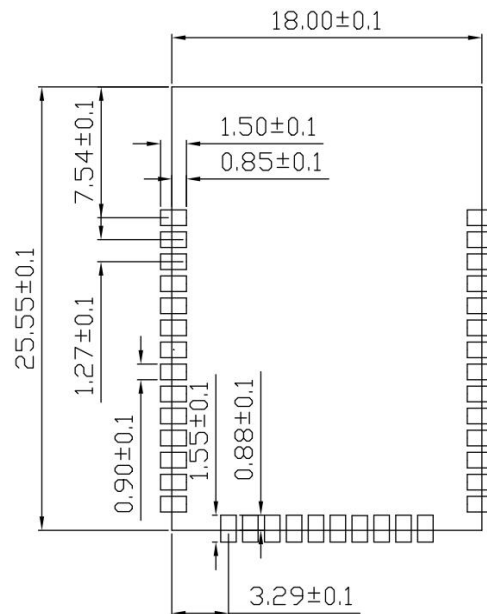

**Figure 11 Recommend PCB package size**


## 7.3. Antenna layout requirements

- The installation position on the motherboard is recommended in the following two ways:

Solution 1: place the module on the edge of the motherboard and extend the antenna area to the edge of the motherboard.

Solution 2: Place the module on the edge of the main board, and the edge of the main board will empty an area at the antenna position.

- In order to meet the performance of the on-board antenna, it is forbidden to place metal parts around the antenna and keep away from high-frequency devices.

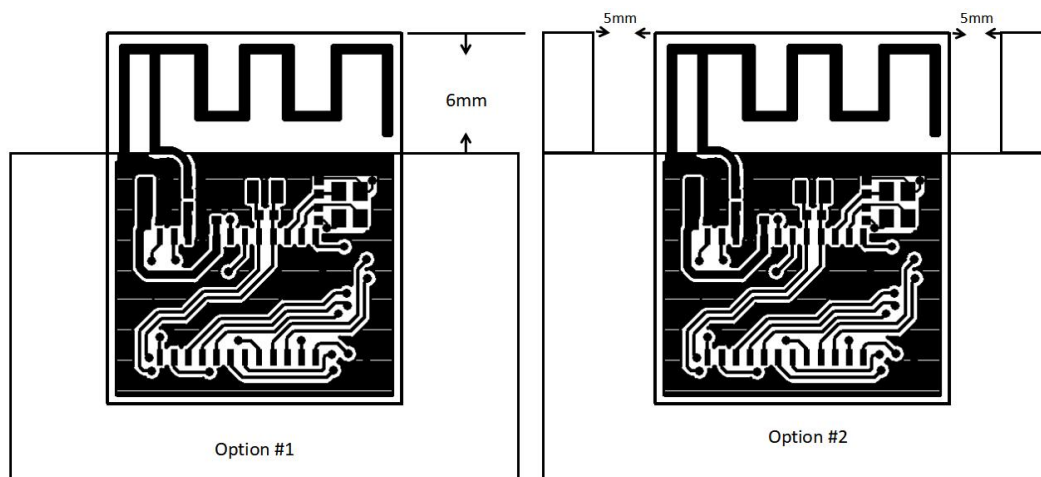

**Figure 12 Schematic diagram of Antenna layout**

## 7.4. Power supply

- Recommend a voltage of 3.3V with a peak current of over 500mA.
- We recommend that you use LDO for power supply. If you use DC-DC, we recommend that you control the ripple within 30mV.
- DC-DC power supply circuit is recommended to reserve the position of dynamic response capacitor, which can optimize the output ripple when the load changes greatly.
- We recommend that you add ESD devices to the 3.3V power interface.

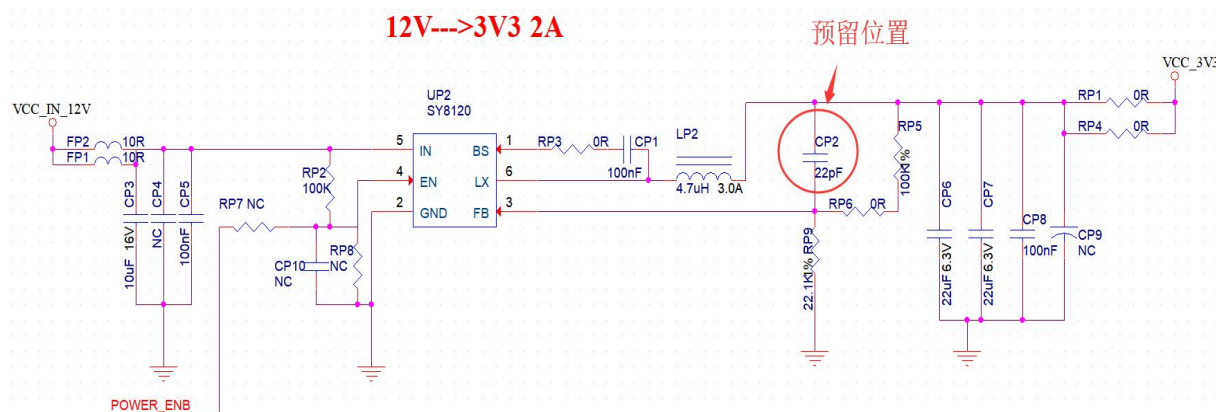


Figure 13 DC-DC step-down circuit diagram

## 7.5. GPIO

- Some IO ports are introduced outside the module. If you need to use them, we recommend that you connect 10-100 ohms of resistance to the IO ports in series. In this way, overshoot can be suppressed and the levels on both sides can be more stable. It is helpful for both EMI and ESD.
- For the pull-down of special I/O ports, please refer to the instructions in the specification, which will affect the startup configuration of the module.
- The I/O port of the module is 3.3V. If the main control does not match the I/O port level of the module, a level conversion circuit needs to be added.
- If the IO port is directly connected to the peripheral interface, or the terminal such as the pin, it is recommended to reserve ESD devices near the terminal of the IO port.

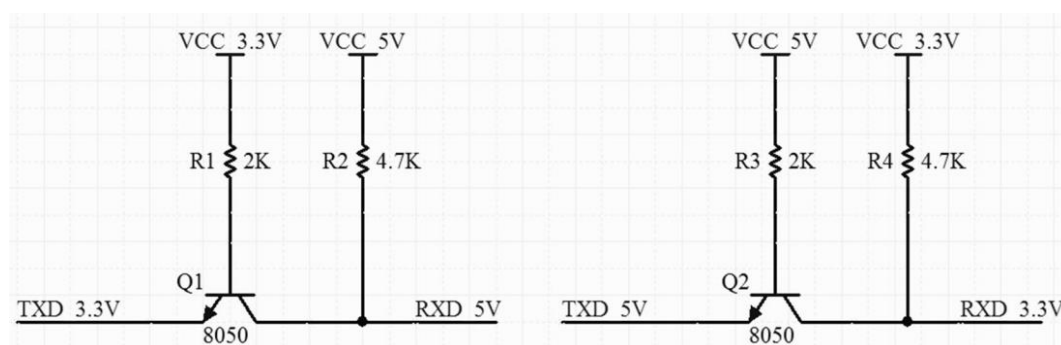


Figure 14 Level conversion circuit


## 8. Storage Conditions

Products sealed in moisture-proof bags shall be stored in a non-condensing atmospheric environment of  $<40^{\circ}\text{C}/90\% \text{ RH}$ .

The humidity sensitivity level MSL of the module is Level 3.

After the vacuum bag is unpacked, it must be used up within 168 hours at  $25\pm 5^{\circ}\text{C}/60\% \text{ RH}$ , otherwise it can be put on line again after baking.

## 9. Reflow soldering curve

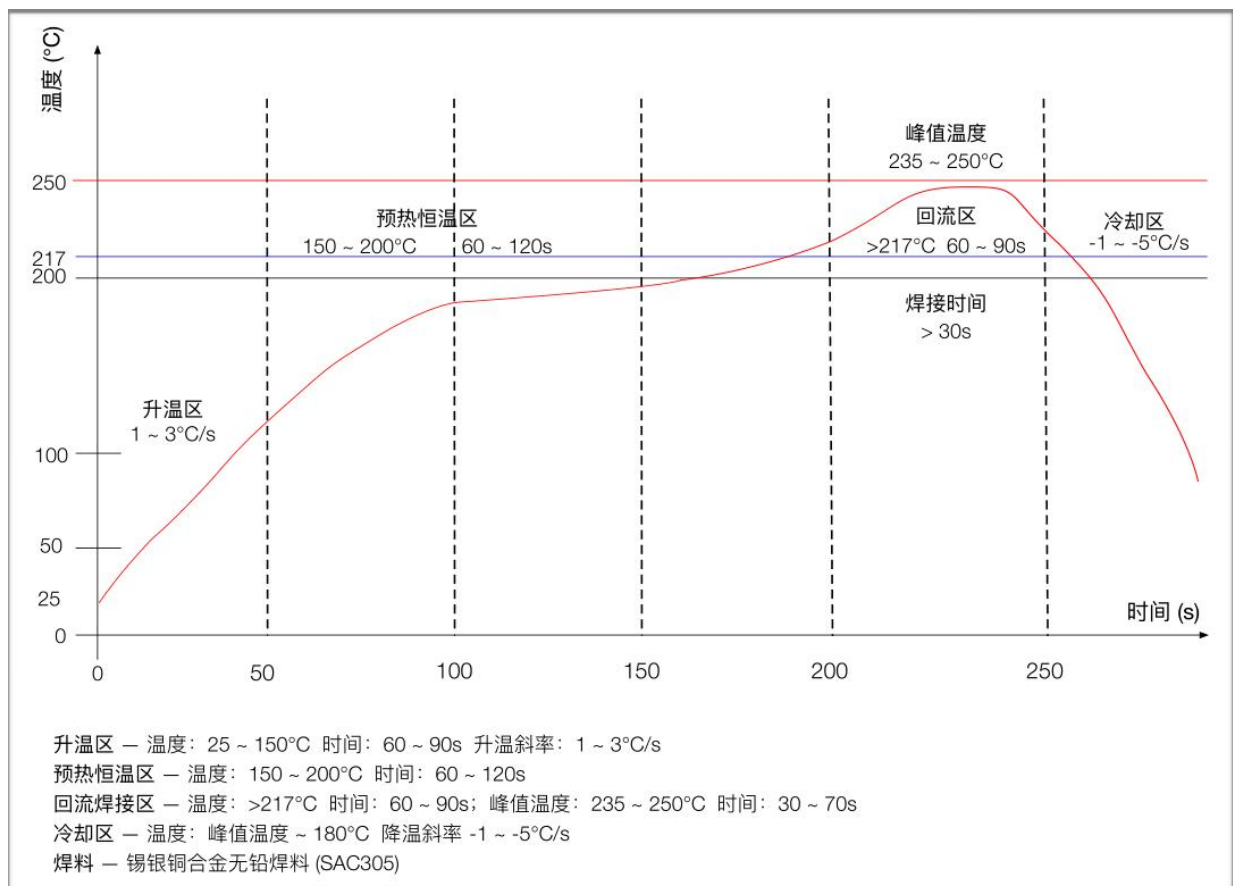

**Figure 15 Reflow soldering curve**

## 10. Product packaging information

Ai-BS21-32S module adopts braided packaging, 800pcs/disk. As shown in the following figure:



Figure 16 Packing ribbon diagram

## 11. Contact us

[Ai-Thinker official website](#)

[Office forum](#)

[Develop DOCS](#)

[LinkedIn](#)

[Tmall shop](#)

[Taobao shop](#)

[Alibaba shop](#)

[Technical support email: support@aithinker.com](#)

[Domestic business cooperation: sales@aithinker.com](#)


[Overseas business cooperation: overseas@aithinker.com](#)

Company Address: Room 403-405, 408-410, Block C, Huafeng Smart Innovation Port, Gushu 2nd Road, Xixiang, Baoan District, Shenzhen.

Tel: +86-0755-29162996



WeChat mini program



WeChat official account

## Disclaimer and copyright notice

The information in this article, including the URL address for reference, is subject to change without notice.

The document is provided "as is" without any guarantee responsibility, including any guarantee for merchantability, suitability for a specific purpose, or non-infringement, and any guarantee mentioned elsewhere in any proposal, specification or sample. This document does not bear any responsibility, including the responsibility for infringement of any patent rights arising from the use of the information in this document. This document does not grant any license for the use of intellectual property rights in estoppel or other ways, whether express or implied.

The test data obtained in the article are all obtained from Ai-Thinker's laboratory tests, and the actual results may vary slightly.

All brand names, trademarks and registered trademarks mentioned in this article are the property of their respective owners, and it is hereby declared.

The final interpretation right belongs to Shenzhen Ai-Thinker Technology Co., Ltd.

## Notice

Due to product version upgrades or other reasons, the contents of this manual may be changed.

Shenzhen Ai-Thinker Technology Co., Ltd. reserves the right to modify the contents of this manual without any notice or prompt.

This manual is only used as a guide. Shenzhen Ai-Thinker Technology Co., Ltd. makes every effort to provide accurate information in this manual. However, Shenzhen Ai-Thinker Technology Co., Ltd. does not guarantee that the contents of the manual are completely free of errors. All statements and information in this manual And the suggestion does not constitute any express or implied guarantee.

## Statement

Ai-Thinker may provide technical and reliability data (including data sheets), design resources (including reference designs), application or other design recommendations, network tools, safety information and other resources (the "Resources") "as is" without warranties of any kind, express or implied. Including, but not limited to, express or implied warranties of suitability, fitness for a particular use, or non-infringement of any third party's intellectual property rights. And specifically declares that it is not liable for any necessary or incidental losses, including but not limited to, arising from the application or the use of any of our products and circuits.

Ai-Thinker reserves the right to release information in this document (including but not limited to metrics and product descriptions) and any changes to our products without prior notice. This document automatically supersedes and replaces all information provided in previous versions of the same document number file.

These resources are available to skilled developers who design with Ai-Thinker products. You are solely responsible for: (1) Selecting the appropriate Ai-Thinker products for your application; (2) Design, validate, and run your application and product throughout its life cycle; (3) Ensure that your application meets all applicable standards, codes and laws, as well as any other functional security, information security, regulatory or other requirements.

Ai-Thinker may authorize you to use these resources only for the development of applications of Essence Products described in this Resource. Without the permission of Ai-Thinker, any unit or individual shall not extract or copy part or all of these resources, and shall not be transmitted in any form. You are not entitled to use any other Ai-Thinker intellectual property rights or any third party intellectual property rights. You shall indemnify you in full for any claims, damages, costs, losses and liabilities arising against Ai-Thinker or its representatives in connection with the use of these resources, for which Ai-Thinker is not liable.

The products offered by Ai-Thinker are subject to the terms of sale of Ai-Thinker or other applicable terms attached to Essence's products. Essence's availability of these resources does not extend or otherwise change the warranties or warranties disclaimers applicable to product releases.