

# Reliability Test Report

<b>Product Name:</b>	<b><u>M61 Series</u></b>
<b>Product Model:</b>	<b>Ai-M61-32SU V1.1</b>
<b>Test Date:</b>	<b>2024.03.27-2024.04.03</b>
<b>Tested by:</b>	<b>Kang Penghui</b>
<b>Reviewed by:</b>	<b>An Sanchao</b>


## 1. Inspection Standard

No.	Process Name	Inspection Item	Inspection Equipment	Sampling Level (Refer to GB/T 2828.1-2012)	Acceptable Quality Level		
					CR (Critical Defect)	MA (Major Defect)	MI (Minor Defect)
1	Reliability test	High/low temperature storage; high/room/low temperature power on/off; high/low temperature operation; alternating hot and humid; thermal shock	Constant temperature and humidity chamber	Normal single sampling, special inspection S-1	0 accept, 1 reject		

## 2. Test Items

No.	Item	Test Conditions
1	Low temperature storage test	Test Conditions: -40°C Test duration: 8h After a 1-hour soak at -40°C, perform a cold start test.
2	High temperature storage test	Test conditions: 100°C + 93% RH Test duration: 8h After restoring to 85°C and a 1-hour soak, perform a hot start test.
3	Low temperature operation test	Test Conditions: -40°C Test duration: 24h
4	High temperature operation test	Test Conditions: 85°C + 93% RH Test duration: 24h
5	AC power on/off test with temperature	A) Temperature: -40°C B) Temperature: 25°C + 93% RH C) Temperature: 85°C + 93% RH Cycle each condition 200 times, with 30s ON and 30s OFF.
6	Alternating hot and humid test	A) Operate at 85°C + 93% RH for 4h; B) Operate at 25°C + 93% RH for 4h; Cycle steps A and B for a total of 2 cycles.
7	Thermal shock test	Test conditions: -40°C–100°C + 93% RH, soak for 30min at each temperature Temperature transition time: 50min for heating, 2h for cooling Test duration: 5 cycles

### 3. Test Preparation

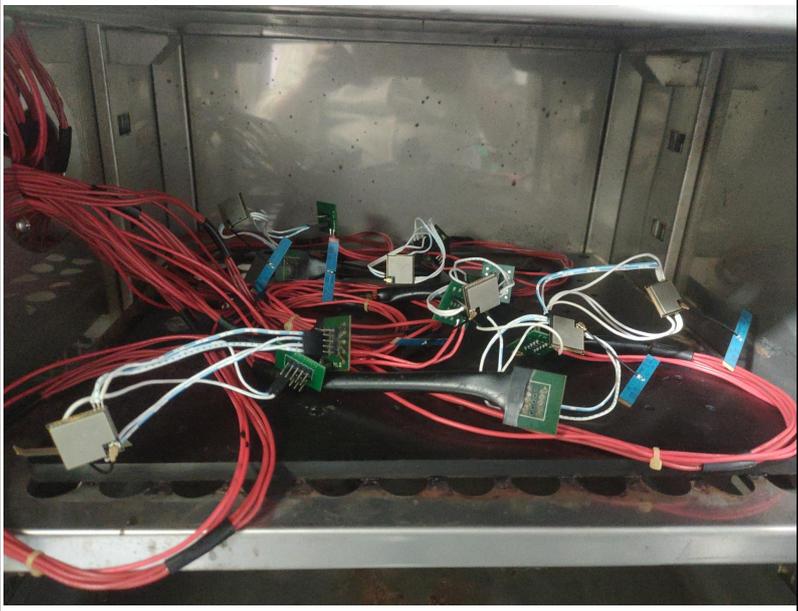
No.	Item	Image/Attachment
1	Reliability documentation	Refer to the M61 series reliability documentation
2	Test equipment	
3	Sample placement	
4	Test reason	Reliability test for new product pilot production

## 4.Low Temperature Storage Test

Test Conditions: Power-off test. Store the product at -40°C for 8h, then perform a cold start test.

Test Profile:

Is Power Off ——  
Is Power On ——

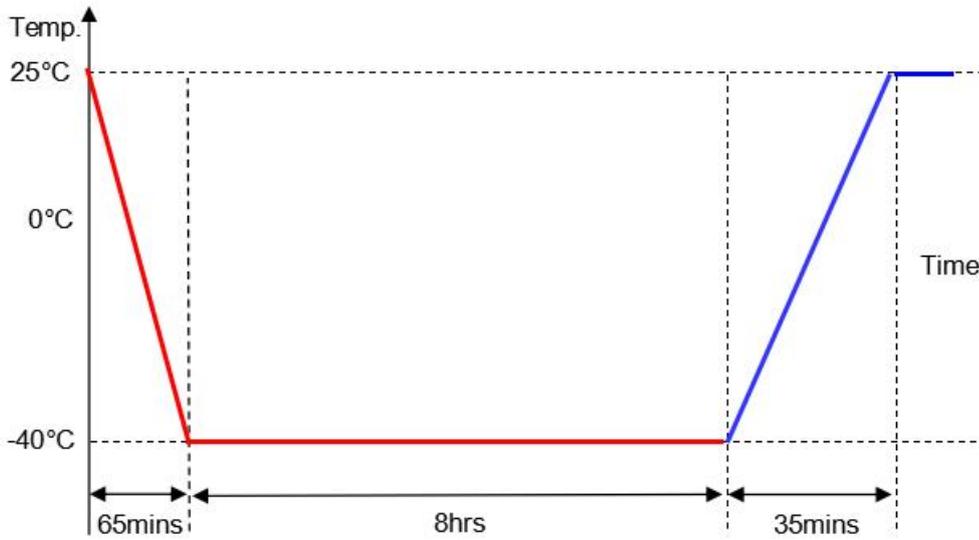

### Test Criteria:

1. During the cold start test, the module functions normally. After the module is properly connected, power on the module and start the test by sending commands. If no packet loss is observed in the receiver log, the module is considered to be functional.
2. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration


Sample Quantity	Test Data	Test Results																								
6PCS	<p>The screenshot shows three windows of the AT&amp;PING software. Each window displays the target IP address, ping command settings, and a log of successful ping responses. The results for the three samples are summarized below:</p> <table border="1"> <thead> <tr> <th>Sample</th> <th>Target IP</th> <th>Send Count</th> <th>Success Count</th> <th>Loss (%)</th> <th>Avg RT (ms)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>192.168.50.174</td> <td>4036</td> <td>4036</td> <td>0.00%</td> <td>3.16</td> </tr> <tr> <td>2</td> <td>192.168.50.142</td> <td>4174</td> <td>4174</td> <td>0.00%</td> <td>3.04</td> </tr> <tr> <td>3</td> <td>192.168.50.152</td> <td>3171</td> <td>3171</td> <td>0.00%</td> <td>3.12</td> </tr> </tbody> </table>	Sample	Target IP	Send Count	Success Count	Loss (%)	Avg RT (ms)	1	192.168.50.174	4036	4036	0.00%	3.16	2	192.168.50.142	4174	4174	0.00%	3.04	3	192.168.50.152	3171	3171	0.00%	3.12	PASS
Sample	Target IP	Send Count	Success Count	Loss (%)	Avg RT (ms)																					
1	192.168.50.174	4036	4036	0.00%	3.16																					
2	192.168.50.142	4174	4174	0.00%	3.04																					
3	192.168.50.152	3171	3171	0.00%	3.12																					

## 5.High Temperature Storage Test

**Test Conditions:** Power-off test. Store the product at 100°C + 93% RH for 8h, then restore it to 85°C + 93% RH for a 1-hour soak, and perform a hot start test.

**Test Profile:**

**Is Power Off** —  
**Is Power On** —

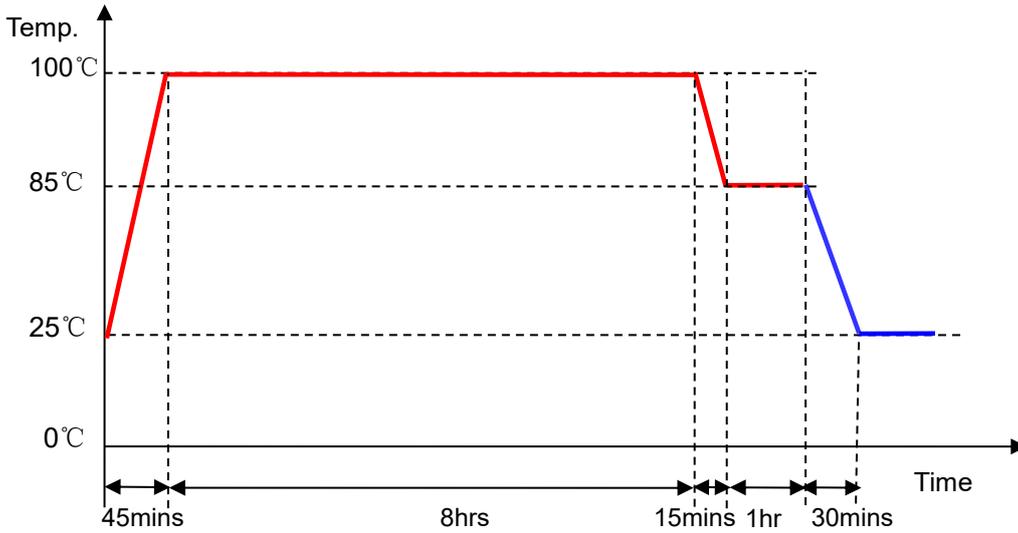

### Test Criteria:

1. During the hot start test, the module functions normally. After the module is properly connected, power on the module and start the test by sending commands. If no packet loss is observed in the receiver log, the module is considered to be functional.
2. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.


Sample Quantity	Test Data	Test Results
6PCS		PASS

## 6.Low Temperature Operation Test

Test Conditions: Power-on test. Operate at -40°C for 24h.

Test Profile:

Is Power Off ——  
Is Power On ——

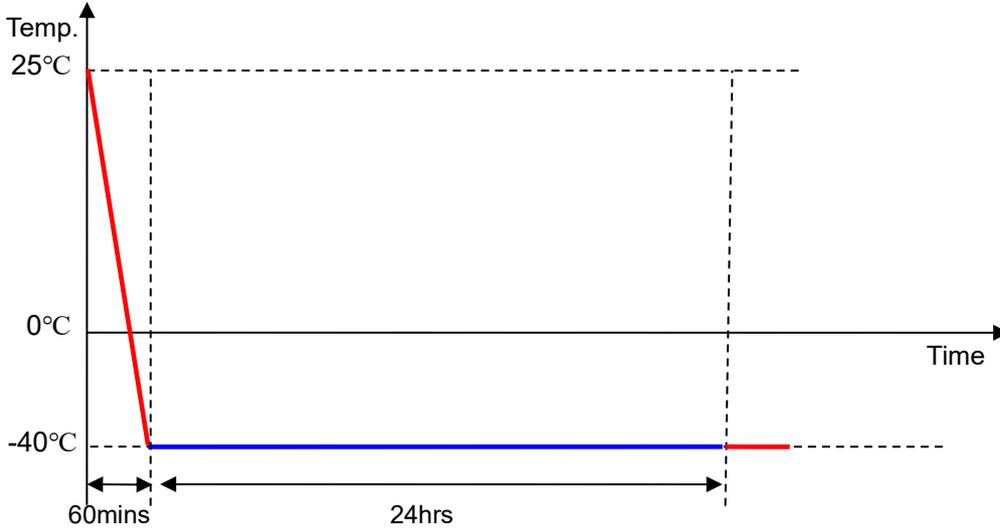

### Test Criteria:


1. After the module is properly connected, power on the module and start the test by sending commands. If no packet loss is observed in the receiver log, the module is considered to be functional.
2. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.

Sample Quantity	Test Data	Test Results
6PCS		PASS

# 7.High Temperature Operation Test

Test Conditions: Power-on test. Operate at 85°C+ 93% RH for 24h.

Test Profile:

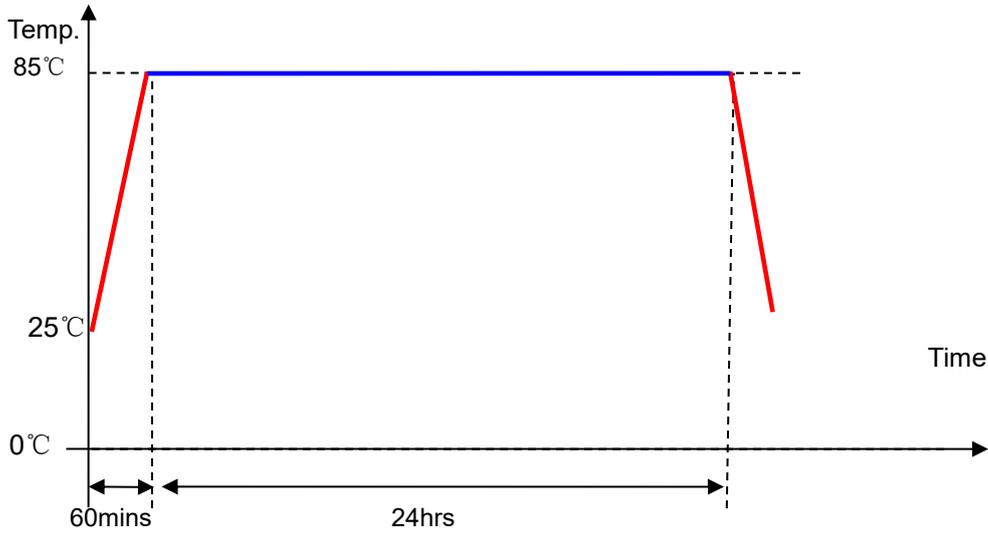

## Test Criteria:


1. After the module is properly connected, power on the module and start the test by sending commands. If no packet loss is observed in the receiver log, the module is considered to be functional
2. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.

Sample Quantity	Test Data	Test Results
6PCS		PASS

# 8.AC Power On/Off Test with Temperature

- Test Conditions:**
1. Power on: 30s; power off: 30s.
  2. Temperature: -40°C, 25°C + 93% RH, 85°C + 93% RH.
  3. Cycle: Each test condition cycles 200 times.

**Test Profile:**

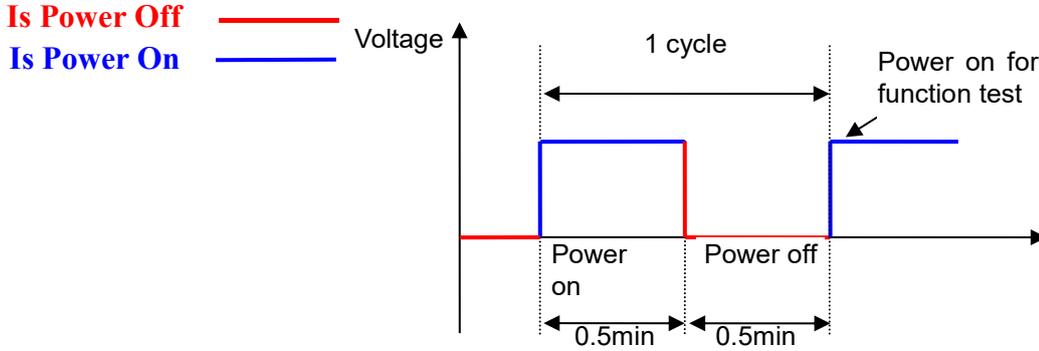

**Test Criteria:**

1. After the module is properly connected, power on the module and start the test by sending commands. If no packet loss is observed in the receiver log, the module is considered to be functional.
2. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.

Item	Sample Quantity	Test Data	Test Results
Power on/off at room temperature	6PCS		PASS
Power on/off at low temperature	6PCS		PASS
Power on/off at high temperature	6PCS		PASS

# 9. Alternating Hot and Humid Test


## Test Conditions:

1. Operate at 85°C + 93% RH for 4h;
  2. Operate at 25°C + 93% RH for 4h;
- Cycle step 1 and step 2, a total of 2 cycles.

## Test Profile:

Is Power Off —

Is Power On —

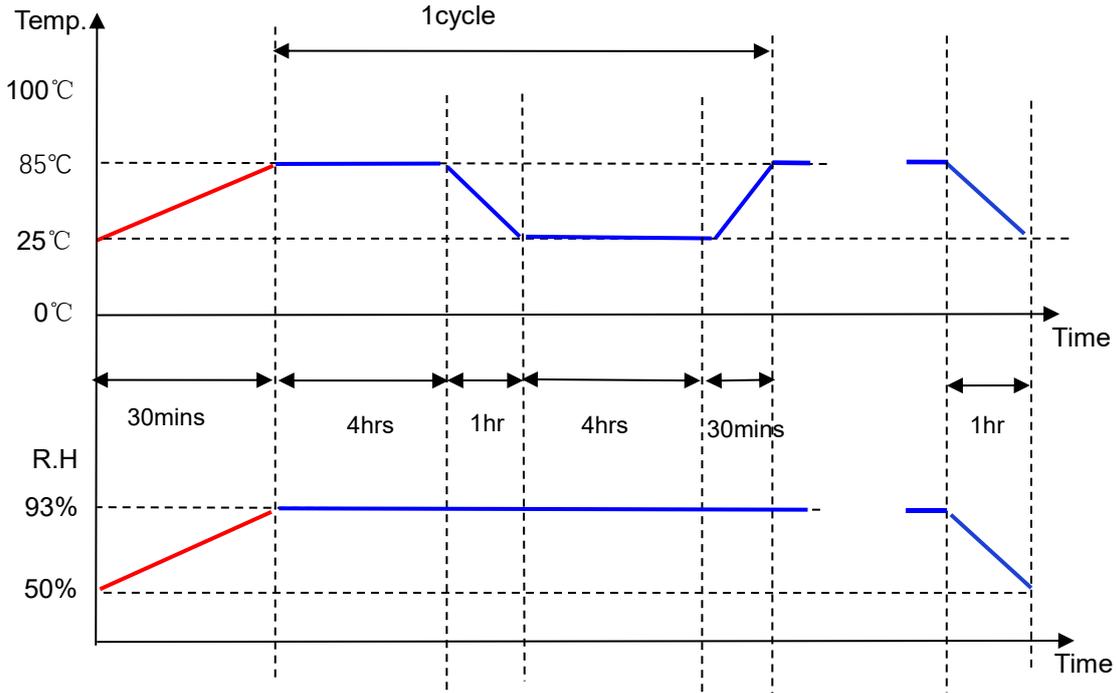

## Test Criteria:

1. After the module is properly connected, power on the module and start the test by sending commands. If no packet loss is observed in the receiver log, the module is considered to be functional.
2. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.

Sample Quantity	Test Data	Test Results
6PCS		PASS


# 10. Thermal Shock Test

## Test Conditions:

Power-off test. Temperature cycling between -40–100°C + 93% RH, with a heating time of 50min and a cooling time of 2h. Each stage is held for 30min, for a total of 5 cycles.

## Test Profile:

Is Power Off  
Is Power On

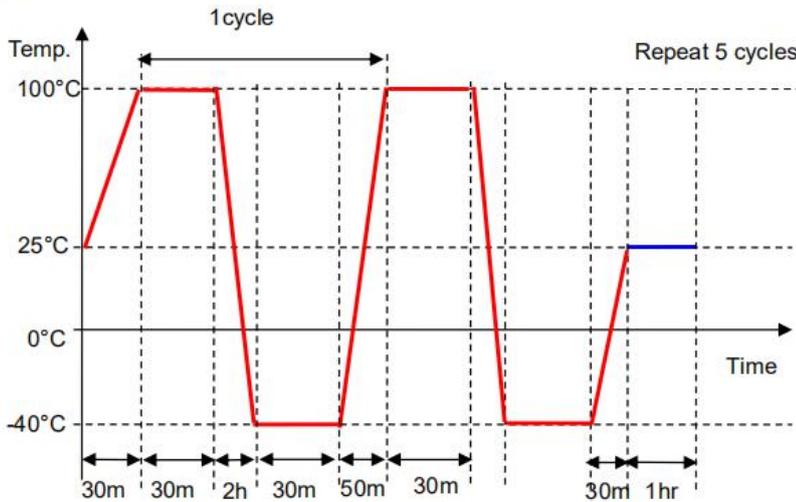

## Test Criteria:

1. After the module is properly connected, power on the module and start the test by sending commands. If no packet loss is observed in the receiver log, the module is considered to be functional.
2. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.

Sample Quantity	Test Data	Test Results
6PCS		PASS