



TB-02-Kit_V2.0Specification

Version V1.0

Copyright ©2021

Disclaimer and Copyright Notice

The information in this document, including referenced URLs, is subject to change without notice.

The document is provided “as is” without warranty of any kind, express or implied, including but not limited to the warranties of merchantability, fitness for a particular purpose, or non-infringement. Furthermore, no warranty is given regarding proposals, specifications, or samples mentioned elsewhere. The publisher bears no responsibility, including for any infringement of patent rights arising from the use of information contained herein. This document does not grant, expressly or impliedly, by estoppel or otherwise, any license to intellectual property rights.

All test data presented herein are obtained from Ai-Thinker laboratories. Actual results may vary slightly.

All trade names, trademarks, and registered trademarks mentioned are the property of their respective owners.

Shenzhen Ai-Thinker Technology Co., Ltd. reserves the final right of interpretation of this document.

Notice

This manual may be updated due to product version upgrades or other reasons. Shenzhen Ai-Thinker Technology Co., Ltd. reserves the right to modify the content of this manual without prior notice or announcement. This manual is intended as a usage guide only. While Shenzhen Ai-Thinker Technology Co., Ltd. strives to provide accurate information, it does not guarantee that the content is entirely free of errors. All statements, information, and recommendations in this manual do not constitute any express or implied warranty.

Document Revision History

Version	Date	Description of Changes	Authored by	Approved by
V1.0	2021.08.03	First edition	junx	Xu Hong

Contents

Disclaimer and Copyright Notice	2
Notice	2
Document Revision History	3
1. Product Overview	5
1.1. Features	6
2. Main Parameters	7
2.1. Electrical Parameters	8
2.2. Electrical Characteristics	8
3. Appearance and Dimensions	9
4. Pin Definition	10
TB-02-KIT_V2.0 Pin Diagram	10
TB-02-Kit_V2.0 Pin Function Definition	10
5. Schematic Diagram	12
6. Packaging Information	13
7. Related Model	13
8. Contact Information	13

1. Product Overview

The TB-02-Kit_V2.0 development board is a smart lighting development board designed for the TB-02 module. It features five built-in PWM channels, allowing independent adjustment of RGB seven-color lights and two channels of warm/cool LEDs. All available I/Os of the module are exposed via pin headers for convenient development and debugging. The board integrates a wealth of resources, including AT commands, SDK secondary development, support for Bluetooth mesh networking, control via Android/iOS apps and WeChat mini programs, as well as Tmall Genie voice direct control. Multiple development boards can be interconnected for Mesh network debugging. All interfaces including GPIOs, PWM, I2C, ADC are accessible via 2.54 mm pin headers, enabling flexible peripheral connections. The UART interface supports firmware flashing for quick and easy updates! Additionally, the SWS pin on the pin header can be used with Telink's official programming tool for firmware flashing.

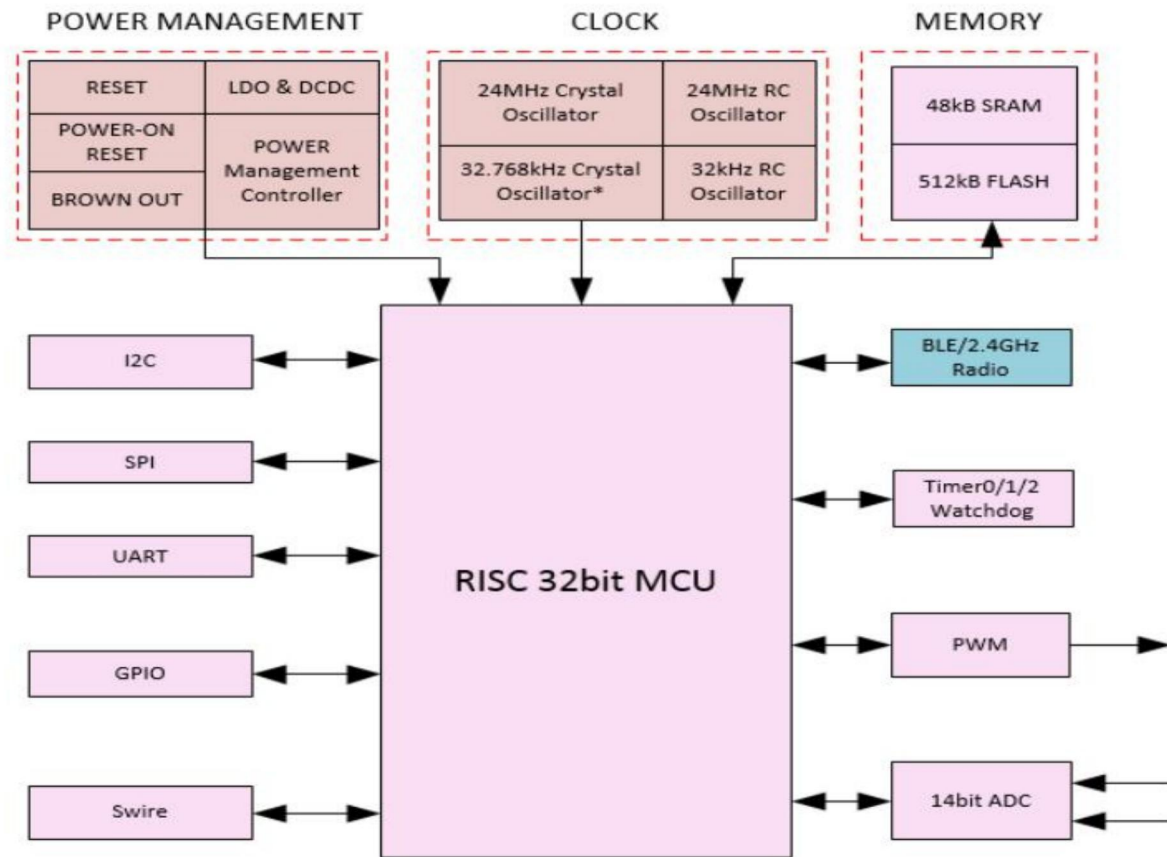


Figure 1 Chip Architecture Diagram

1.1. Features

- Module model: TB-02
- Two versions: AliGenie (Tmall Genie) Special Edition; Standard AT Version
- BLE 5.0, supports Mesh networking
- Interface type: Standard micro USB + 2.54 mm pitch pin header
- Provides PWM, I2C, GPIO and ADC interfaces
- Equipped with integrated RGB three-in-one LED beads and warm/cold light beads
- Features a reset button and one user-defined button
- Supports direct voice control via Tmall Genie
- Supports Android/iOS app control and Wechat mini program control
- Supports AT commands and ADK secondary development

2. Main Parameters

Table 1 Main Parameter Specifications

Model	TB-02-Kit_V2.0 development board
Package	DIP-20 (2.54 pitch standard pin header)
Dimensions	32.3*28.7*18.0 (±0.2) mm
Antenna Type	Onboard PCB antenna
Frequency Range	2400–2483.5 MHz
Output Power	10±2 dBm
Receiver Sensitivity	<-94 dBm
Operating Temperature	-20– 70 °C
Storage Conditions	-40–125 °C, <90% RH
Power Supply Range	Micro USB power supply voltage 4.75–5.25 V, recommended 5.0 V
Supported Interfaces	PWM/GPIO/UART/SPI/I2C/
Available I/Os	14
UART Baud Rate	Default 115200 bps
Bluetooth	BLE5.0
Power Consumption	Sleep mode: 0.8 uA (module only) Standby mode: 3 mA (module only) Full lode mode (TX: 10 dBm): 23 mA (module only) Development board baseboard: 4 mA
SPI Flash	Built-in 512 KByte

2.1. Electrical Parameters

TB-02-Kit_V2.0 development board is an ESD-sensitive device and requires special precautions during handling.



2.2. Electrical Characteristics

Absolute Maximum Ratings

Any value exceeding the following absolute maximum ratings may result in chip damage

Parameter	Min	Typ	Max	Unit
MicroUSB Power Supply Voltage	4.75	5.0	5.25	V
Operating Temperature	-20	-	+70	°C
Storage Temperature	-40	-	+125	°C

BLE RF Performance


Description	Typ	Unit
Output Power		
Transmit Power	10±2	dBm
Receiver Sensitivity Low-power Bluetooth 1 M		
Sensitivity @30.8% PER	<-94	dBm

Power Consumption

This power consumption refers to the power consumption of the single module only.


Mode	Min	Typ	Max	Unit
Power Power Consumption (10 dBm)	-	23	-	mA
Standby Power Consumption	-	3	-	mA
Sleep	-	0.8	-	mA

3. Appearance and Dimensions

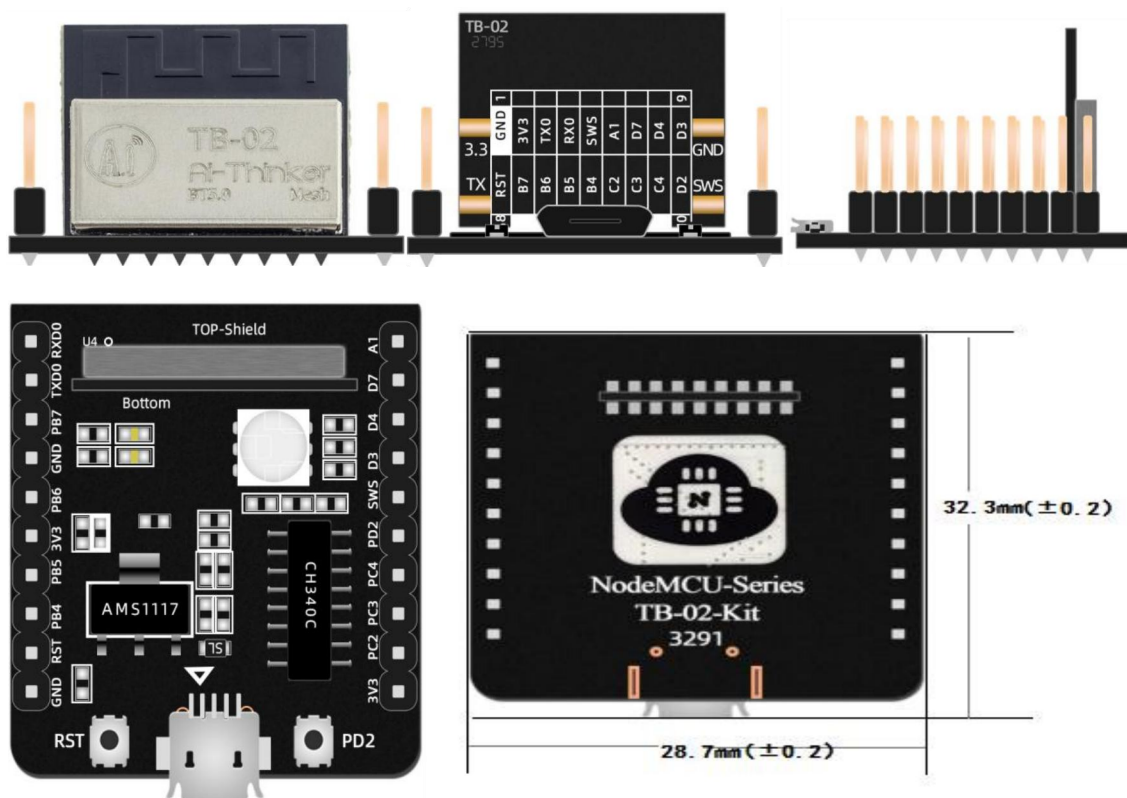

(Rendering for reference only; actual product may vary)

4. Pin Definition

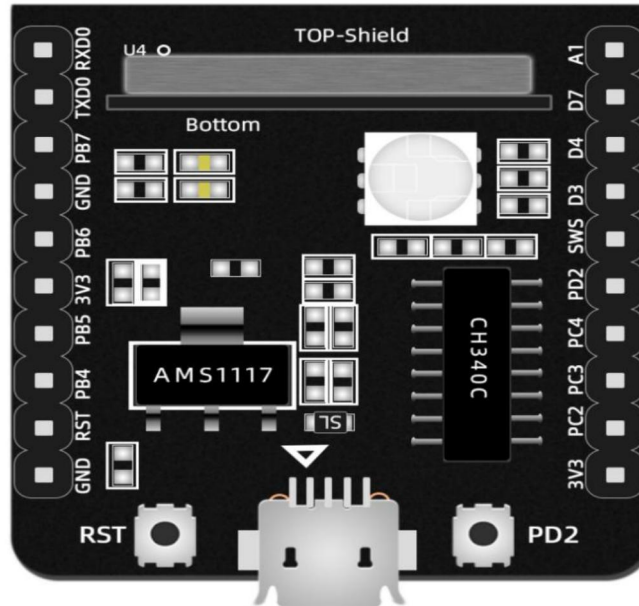

TB-02-KIT_V2.0 Pin Diagram


TB-02-Kit_V2.0 module exposes a total of 20 pins, as shown in the pin diagram. The pin function definition table provides the detailed interface specifications

TB-02-Kit_V2.0 Pin Function Definition

Pin No.	Name	Function Description
1	RXD	UART_RX/GPIO PA0/PWM0 Inverted Output
2	TXD	UART_TX/GPIO PB1/PWM4 Output/SAR ADC Input
3	PB7	SPI_DO (Data Output)/UART_RX/SAR ADC Input/GPIO PB7
4	GND	Ground
5	PB6	SPI_DI (Data Input, I2C_SDA)/UART_RTS/SAR ADC Input/GPIO PB6
6	3V3	Power Supply
7	PB5	Cool/Warm Light Port C/PWM5 Output/SAR ADC Input/GPIO PB5
8	PB4	Cool/Warm Light Port W/PWM4 Output/SAR ADC Input/GPIO PB4
9	RST	Reset (Active Low)
10	GND	Ground

11	3V3	Power Supply
12	PC2	RGB Light B Channel/PWM0 Output/I2C Serial Data (SDA)/32 kHz Crystal Output (Optional)/GPIO PC2
13	PC3	RGB Light R Channel/PWM1 Output/UART_RX (Receive)/I2C Serial Clock (SCL)/32 kHz Crystal Input (Optional)/GPIO PC3
14	PC4	RGB Light G Channel/PWM2 Output/UART_CTS/PWM0 Inverted Output/SAR ADC Input/GPIO PC4
15	PD2	GPIO PD2/PWM3 Output/SPI Chip Select (Active Low)/I2S_LR
16	SWS	Single-Wire Slave (SWS)/UART_RTS/GPIO PA7
17	D3	GPIO PD3/PWM1 Inverted Output/I2S_SDI
18	D4	GPIO PD4/Single-Wire Master (SWM)/PWM2 Inverted Output/I2S_SDO
19	D7	GPIO PD7/SPI Clock (SCK, or I2C_SCK)
20	A1	GPIO PA1/I2S_clock

5. Schematic Diagram

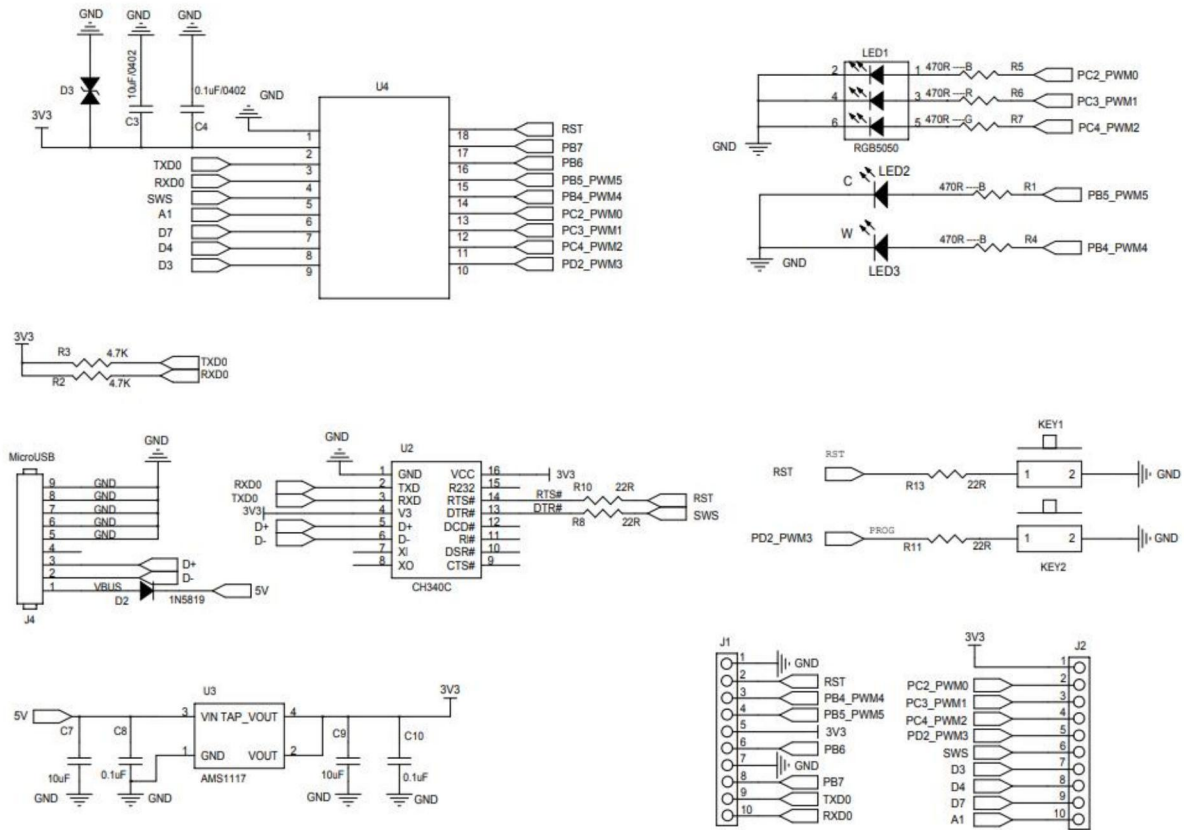

6. Packaging Information

The TB-02-Kit_V2.0 is packaged in ESD bag.

7. Related Model

Model	Power Supply	Package	Dimensions	Default Communication Interface
TB-02	3.3V	DIP-18/SMD-13	18.0*18.0*2.8 (± 0.2) mm	UART
TB-02-Kit	5V	DIP-16	30.0*40.0*13.0 (± 0.2) mm	UART
TB-02-Kit_V2.0	5V	DIP-20	32.3*28.7*18.0 (± 0.2) mm	UART
More Product Information: https://docs.ai-thinker.com/blue_tooth				

8. Contact Information

Official Website: <https://www.ai-thinker.com>

Development DOCS: <https://docs.ai-thinker.com>

Official Forum: <http://bbs.ai-thinker.com>

Sample Purchase: <https://anxinke.taobao.com>

Business Cooperation: sales@aithinker.com

Technical Support: support@aithinker.com



Company Address: Rooms 403–405, 408–410, Building C, Huafeng Smart Innovation Port, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Contact Hotline: 0755-29162996