



Ai-WB3-01C-Kit Specification

Version V1.0.0

Copyright ©2023

Document resume

Version	Date	Develop/revise content	Edition	Approve
V1.0.0	2023.3.07	First Edition	JieWei	HongXu

Content

1. Product Overview	4
1.1. Characteristic	5
2. Main parameters	6
2.1. Power supply selection	6
2.2. Static electricity requirements	6
2.3. Electrical characteristics	7
2.4. Wi-Fi RF performance	7
2.5. BLE RF performance	8
2.6. Power	8
3. Appearance size	9
4. Indicator light and button description	10
5. Pin definition	11
6. Schematic diagram	13
7. Product package information	14
8. Contact us	14
Disclaimer and copyright notice	15
Notice	15

1. Product Overview

Ai-WB3-01C-Kit is a Wi-Fi&BLE development board developed by Shenzhen Anxinke Technology Co., LTD. The board is equipped with LN882H chip as the core processor and supports Wi-Fi 802.11b/g/n and BLE 5.1 protocols. LN882H chip integration architecture (M4F kernel, dominant frequency up to 160 MHz, built-in 296 KB SRAM, 128 KB ROM and rich peripheral interfaces, including the SDIO/SPI/UART/I2C/PWM/ADC/DMA/SWD/GPIO, etc. It can be widely used in the Internet of Things (IoT), mobile devices, wearable electronic devices, smart home and other fields.

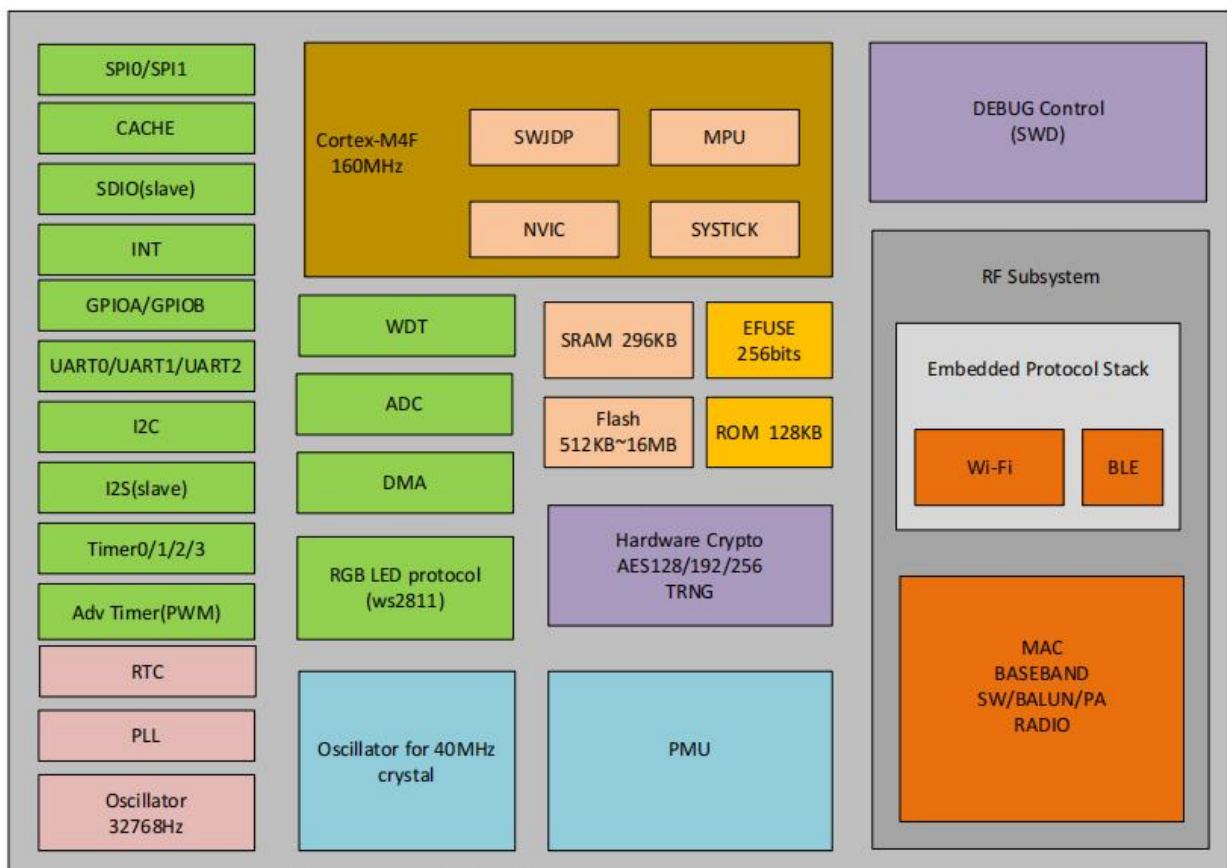


Figure 1 Main chip architecture diagram

1.1. Characteristic

- DIP-30 package
- Support IEEE 802.11 b/g/n protocol
- Support BLE5.1 protocol
- Support long range (125Kbps, 500Kbps) and high data rate (2Mbps)
- Support 296KB SRAM / 128KB ROM
- Support SDIO/SPI/UART/I2C/PWM/ADC/DMA/SWD/GPIO Interface
- Support for multi-channel ADC and programmable amplifiers for sound sensors
- Support RTC real-time clock and WDT watchdog
- Support true random number generator (TRNG)
- Support AES - 128\AES - 192\AES - 256 hardware encryption
- Support 256 bits EFUSE
- Integration CHKSUM accelerator improve TCP/UDP transmission

2. Main parameters

Table 1 main parameters

Model	Ai-WB3-01C-Kit
Package	DIP-30
Size	48.26*25.40(± 0.2)mm
Antenna	On-Board PCB antenna
Frequency	2400 ~ 2483.5MHz
Operation temperature	-40℃ ~ 85℃
Storage environment	-40℃ ~ 125℃ , < 90%RH
Power supply	Support voltage 3.3V or 5V, power supply current ≥ 500 mA
Interfaces	SDIO/SPI/UART/I2C/PWM/ADC/DMA/SWD/GPIO
I/O	18
UART rate	Default 115200 bps
Security	AES-128\AES-192\AES-256 hardware encryption
Flash	Default: 2MByte

2.1. Power supply selection

Ai-WB3-01C-Kit supports three power supply modes:

- Type-C interface power supply (recommended)
- 5V and GND pin power supply
- 3V3 and GND pin power supply

2.2. Static electricity requirements

Ai-WB3-01C-Kit is an electrostatic sensitive equipment, special precautions should be taken during handling.



Figure 2 ESD anti-static diagram

2.3. Electrical characteristics

Table 2 Electrical Characteristics Table

Parameter		Conditio	Min.	Typical value	Max.	Unit
Interface Power supply(Type-C)		VDD	4.5	5	5.3	V
Power supply		VDD	2.7	3.3	3.6	V
I/O	VIL	-	-0.3	0	0.6	V
	VIH	-	VIO-0.6	VIO	VIO+0.3	V
	VOL	-	-0.45	0	0.45	V
	VOH	-	VIO-0.5	VIO	VIO+0.5	V

2.4. Wi-Fi RF performance

Table 3 Wi-Fi RF performance table

Description	Typical value			Unit
Spectrum Range	2400 - 2483.5			MHz
Output power				
Model	Min.	Typical	Max.	Unit
11n mode HT20, PA output power	-	14	-	dBm
11g mode, PA output power	-	16	-	dBm
11b mode, PA output power	-	18	-	dBm
Receiving sensitivity				
Model	Min.	Typical	Max.	Unit
11b, 1 Mbps	-	-95	-	dBm
11b, 11 Mbps	-	-88	-	dBm
11g, 6 Mbps	-	-91	-	dBm
11g, 54 Mbps	-	-74	-	dBm
11n, HT20 (MCS7)	-	-71	-	dBm

2.5. BLE RF performance

Table 4 BLE RF performance table

Description	Typical value			Unit
Spectrum Range	2400 ~ 2483.5MHz			MHz
Output power				
Rate Mode	Min.	Typical	Max.	Unit
1Mbps	-	10	-	dBm
Receiving sensitivity				
Rate Mode	Min.	Typical	Max.	Unit
1Mbps sensitivity @ 30.8% PER	-	-94	-	dBm

2.6. Power

The following power consumption data is based on a 3.3V power supply and an ambient temperature of 25° C.

- All POUT power of the emission model is in the measured value of the antenna interface.
- All emission data is based on 95% of the duty ratio, measured in continuous emission mode.

Table 5 Power Consumption Table

Model		Min.	AVG	Max.	Unit
Tx 802.11b, 11Mbps, POUT=+18dBm		-	260	-	mA
Tx 802.11g, 54Mbps, POUT =+16dBm		-	247	-	mA
Tx 802.11n, MCS7, POUT =+14dBm		-	245	-	mA
Rx 802.11b, 1024 bytes long		-	90	-	mA
Rx 802.11g, 1024 bytes long		-	90	-	mA
Rx 802.11n , 1024 bytes long		-	90	-	mA
Sleep Mode	DTIM=1	-	11	-	mA
	DTIM=3	-	8	-	mA

3. Appearance size

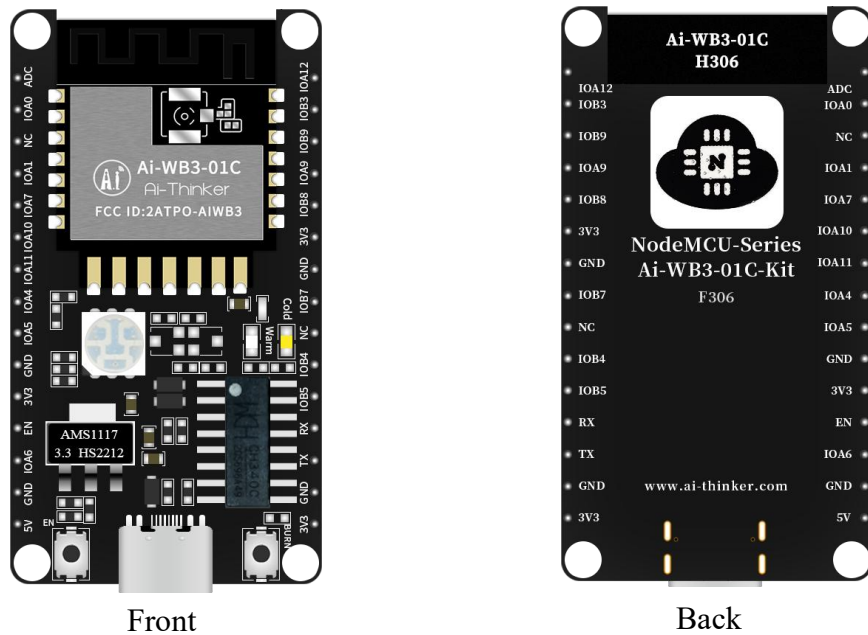


Figure 3 External view (For reference only)

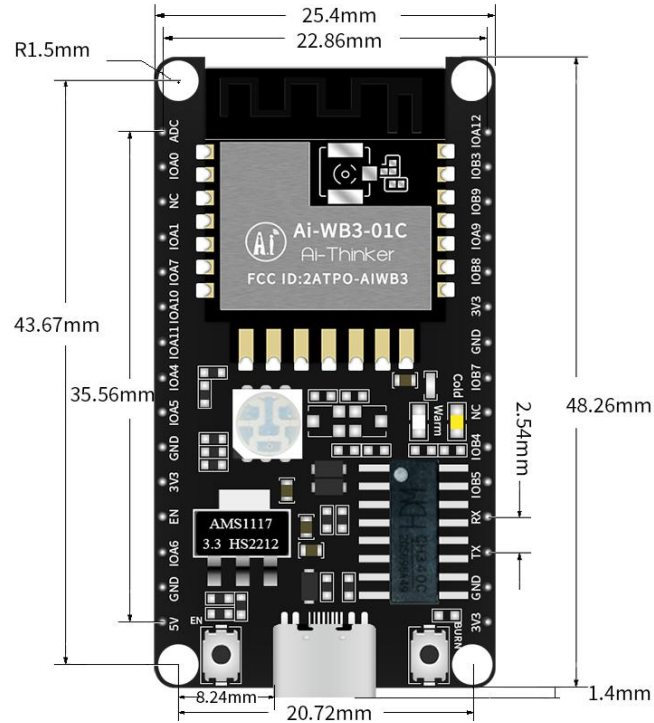


Figure 4 size chart

4. Indicator light and button description

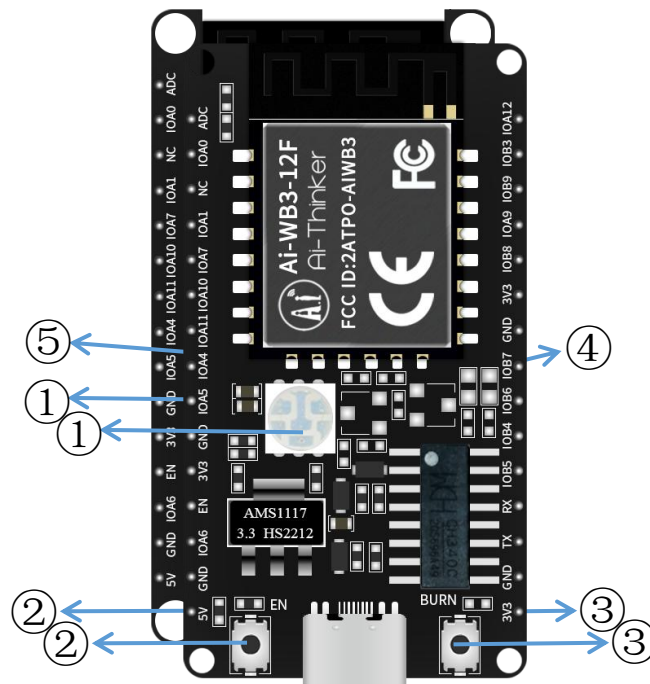


Figure 5 Ai-WB3-01C-Kit indicator light and key position

Table 6 Ai-WB3-01C-Kit indicator light and key position

①	RGB light (red light connected to IOA7, green light connected to IOA10, blue light connected to IOA11, active high level)
②	Reset button
③	Burning key, burning firmware is the need to press the burning key and then short press the reset button
④	Cold lamp (connected to IOB3, active at high level)
⑤	Warm lamp (connected to IOA12, active at high level)

5. Pin definition

Ai-WB3-01C-Kit connects to a total of 30 interfaces. For example, the pin diagram, the pin function definition table is the interface definition.

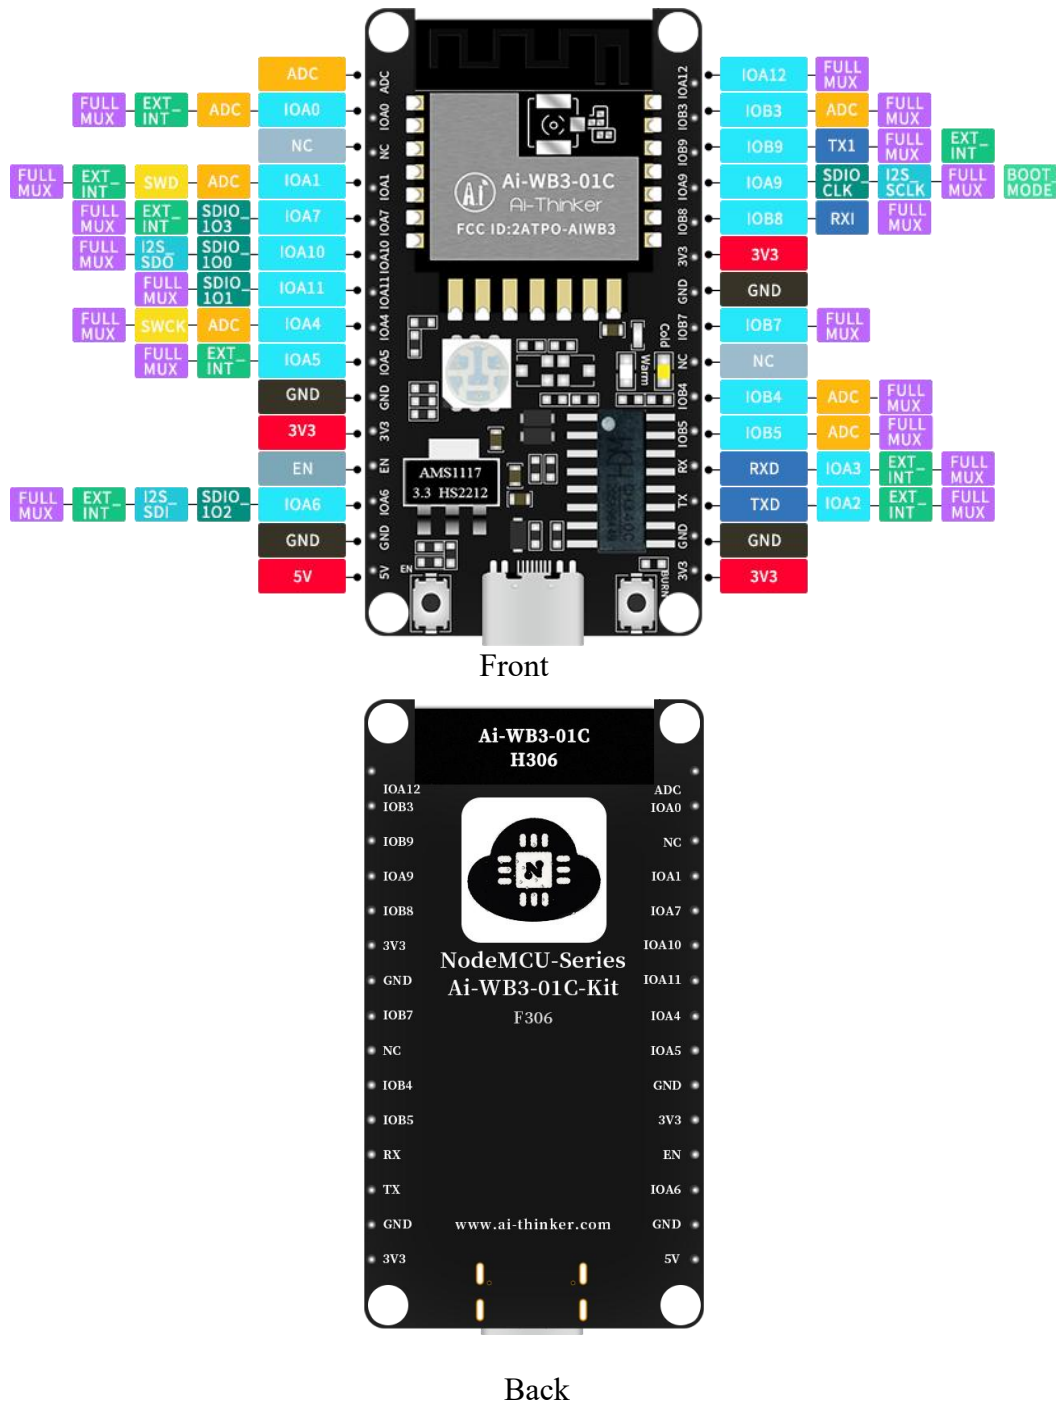


Figure 6 pin diagram

Table 7 Definition table of pin functions

No.	Name	Function
1	ADC	ADC pin, and IOA0 pin partial pressure
2	IOA0	GPIOA0/ADC/EXT_INT/FULLMUX
3	NC	Empty feet
4	IOA1	GPIOA1/ADC/SWD/EXT_INT/FULLMUX
5	IOA7	GPIOA7/SDIO_IO3/EXT_INT/FULLMUX
6	IOA10	GPIOA10/SDIO_IO0/I2S_SDO/FULLMUX
7	IOA11	GPIOA11/SDIO_IO1/FULLMUX
8	IOA4	GPIOA4/ADC/SWCK/FULLMUX
9	IOA5	GPIOA5/EXT_INT/FULLMUX
10	GND	Ground
11	3V3	3.3V Empty feet
12	EN	By default, it is enabled on the chip. The high level is valid
13	IOA6	GPIOA6/SDIO_IO2/I2S_SDI/EXT_INT/FULLMUX
14	GND	Ground
15	5V	5V Empty feet
16	3V3	3.3V Empty feet
17	GND	Ground
18	TX	TXD/GPIOA2/EXT_INT/FULLMUX
19	RX	RXD/GPIOA3/EXT_INT/FULLMUX
20	IOB5	GPIOB5/ADC/FULLMUX
21	IOB4	GPIOB4/ADC/FULLMUX
22	NC	Empty feet
23	IOB7	GPIOB7/FULLMUX
24	GND	Ground
25	3V3	3.3V power supply
26	IOB8	RX1/GPIOB8/FULLMUX
27	IOA9	GPIOA9/SDIO_CLK/I2S_SCLK/FLLMUX/BOOT_MODE
28	IOB9	TX1/GPIOB9/FULLMUX/EXT_INT
29	IOB3	GPIOB3/ADC/FULLMUX
30	IOA12	GPIOA12/FULLMUX

7. Product package information

Table 8 packing information table

Packing List	Packaging method	Per package (Electrostatic)bag	Per package (Sealed bag)
Ai-WB3-01C-Kit	Foam+ Electrostatic bag	1pcs	20pcs

8. Contact us

[Ai-Thinker official website](#)

[Official Forum](#)

[Develop DOCS](#)

[LinkedIn](#)

[Tmall shop](#)

[Taobao shop](#)

[Alibaba shop](#)

Technical support Email: support@aithinker.com

Domestic business cooperation: sales@aithinker.com

Overseas business cooperation: overseas@aithinker.com

Company address: Room 403,408-410, Block C, Huafeng Smart Innovation Port, Gushu 2nd Road, Xixiang, Baoan District, Shenzhen.

Tel: 0755-29162996



WeChat mini program



WeChat official account

Disclaimer and copyright notice

The information in this article, including the URL address for reference, is subject to change without notice.

The document is provided "as is" without any guarantee responsibility, including any guarantee for merchantability, suitability for a specific purpose, or non-infringement, and any guarantee mentioned elsewhere in any proposal, specification or sample. This document does not bear any responsibility, including the responsibility for infringement of any patent rights arising from the use of the information in this document. This document does not grant any license for the use of intellectual property rights in estoppel or other ways, whether express or implied.

The test data obtained in the article are all obtained from Ai-Thinker's laboratory tests, and the actual results may vary slightly.

All brand names, trademarks and registered trademarks mentioned in this article are the property of their respective owners, and it is hereby declared.

The final interpretation right belongs to Shenzhen Ai-Thinker Technology Co., Ltd.

Notice

Due to product version upgrades or other reasons, the contents of this manual may be changed.

Shenzhen Ai-Thinker Technology Co., Ltd. reserves the right to modify the contents of this manual without any notice or prompt.

This manual is only used as a guide. Shenzhen Ai-Thinker Technology Co., Ltd. makes every effort to provide accurate information in this manual. However, Shenzhen Ai-Thinker Technology Co., Ltd. does not guarantee that the contents of the manual are completely free of errors. All statements and information in this manual. And the suggestion does not constitute any express or implied guarantee.