

# Reliability Test Report

<b>Product Name:</b>	<b><u>LoRa Series</u></b>
<b>Product Model:</b>	<b><u>Ra-01SC-P V1.0</u></b>
<b>Test Date:</b>	<b>2024.10.14–2024.10.22</b>
<b>Tested by:</b>	<b>Kang Penghui</b>
<b>Reviewed by:</b>	<b>An Sanchao</b>

## 1. Inspection Plan

No.	Process Name	Inspection Item	Inspection Equipment	Sampling Level (Refer to GB/T 2828.1-2012)	Acceptable Quality Level		
					CR (Critical Defect)	MA (Major Defect)	MI (Minor Defect)
1	Reliability test	High/low temperature storage; high/room/low temperature power on/off; high/low temperature operation; alternating hot and humid; thermal shock	Constant temperature and humidity chamber	Normal single sampling, special inspection S-1	0 accept, 1 reject		

## 2. Test Items

No.	Item	Test Conditions
1	Low temperature storage test	Test conditions: -40°C Test duration: 8h After a 1-hour soak at -40°C, perform a cold start test.
2	High temperature storage test	Test conditions: 100°C + 93% RH Test duration: 8h After restoring to 55°C and a 1-hour soak, perform a hot start test.
3	Low temperature operation test	Test conditions: -40°C Test duration: 24h
4	High temperature operation test	Test conditions: 85°C + 93% RH Test duration: 24h
5	AC power on/off test with temperature	A) Temperature: -40°C B) Temperature: 25°C + 93% RH C) Temperature: 85°C + 93% RH Cycle each condition 200 times, with 30s ON and 30s OFF
6	Alternating hot and humid test	A) Operate at 85°C + 93% RH for 4h; B) Operate at 25°C + 93% RH for 4h; Cycle steps A and B for a total of 2 cycles.
7	Thermal shock test	Test conditions: -40°C–100°C + 93% RH, soak for 30min at each temperature Temperature transition time: 50min for heating, 2h for cooling. Test duration: 5 cycles

### 3. Test Preparation


No.	Item	Image/Attachment
1	Reliability documentation	 Ra-01SC-P模组 可靠性测试说明.docx
2	Test equipment	
3	Sample placement	
4	Test reason	Reliability test for new product pilot production (91110077)

## 4. Low Temperature Storage Test

**Test Conditions:** Power-off test. Store the product at -40°C for 8h, then perform a cold start test.

**Test Profile:**

Is Power Off —  
Is Power On —

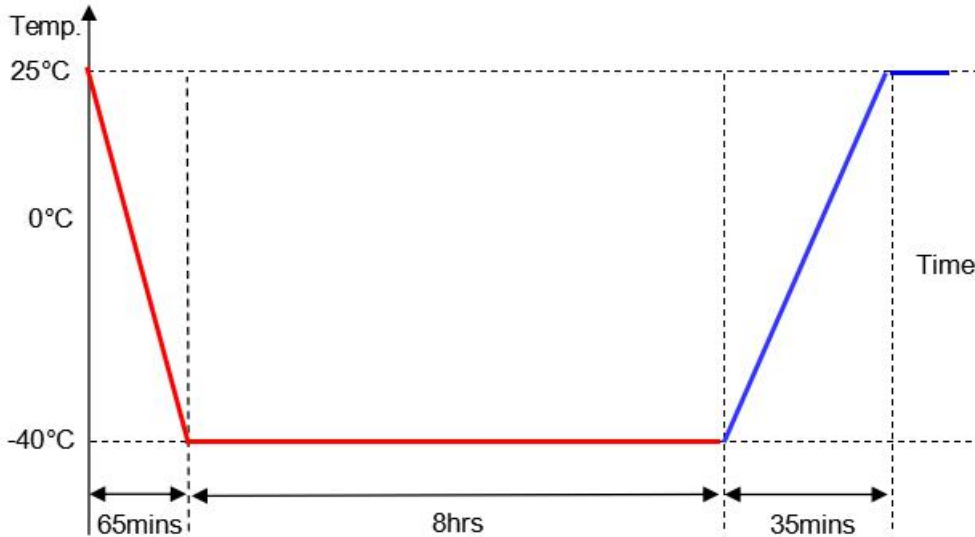

### Test Criteria:

1. During the cold start test, the module functions normally. Observe the packet reception rate and transmission information on the serial port interface to verify that the module functions normally.
2. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.


Sample Quantity	Test Data	Test Result
4PCS	<p>The test data section contains two screenshots of a serial port terminal. The left screenshot shows a series of AT commands and responses, including 'AT+ZPWR?', 'AT+ZPWR=0', and 'AT+ZPWR=1'. The right screenshot shows a similar sequence of commands and responses, including 'AT+ZPWR?', 'AT+ZPWR=0', and 'AT+ZPWR=1'. Both screenshots show the device responding with 'OK' and various status information.</p>	PASS

### 5. High Temperature Storage Test

**Test Conditions:** Power-off test. Store the product at 100°C + 93% RH for 8h, then restore it to 85°C + 93% RH for a 1-hour soak, and perform a hot start test.

**Test Profile:**

Is Power Off ——  
Is Power On ——

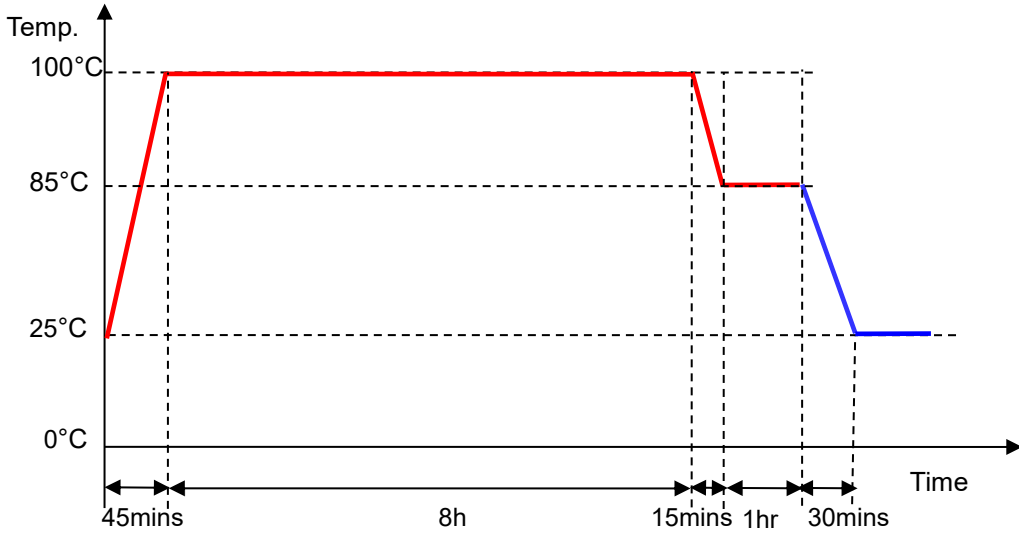

**Test Criteria:**

1. During the hot start test, the module functions normally. Observe the packet reception rate and transmission information on the serial port interface to verify that the module functions normally.
2. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.


Sample Quantity	Test Data	Test Result
4PCS	<p>The test data section contains four screenshots of terminal data. Each screenshot shows a list of packet statistics with columns for '接收数据量' (Received Data Volume), '发送数据量' (Transmitted Data Volume), and '成功率' (Success Rate). The data indicates that all four samples passed the test with 100% success rates across various packet types and sizes.</p>	PASS

## 6. Low Temperature Operation Test

Test Conditions: Power-on test. Operate at -40°C for 24h.

Test Profile:

Is Power Off ————  
Is Power On ————

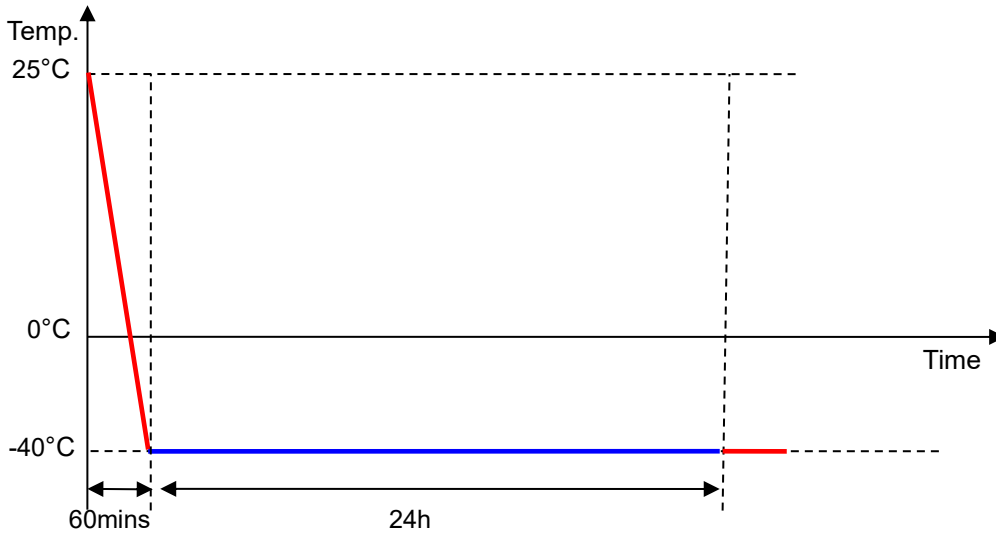

### Test Criteria:

1. After connecting the module, observe the packet reception rate and transmission information on the serial port interface to verify that the module functions normally.
2. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.


Sample Quantity	Test Data	Test Result
4PCS	<p>The test data consists of four screenshots of serial port data logs. Each screenshot shows the AT command interface with various AT commands (e.g., AT+QMI, AT+QMS, AT+QMG, AT+QMP, AT+QMG, AT+QMP, AT+QMG, AT+QMP) and their corresponding responses. The logs confirm that the module is functioning normally and providing accurate data during the test.</p>	PASS

# 7. High Temperature Operation Test

Test Conditions: Power-on test. Operate at 85°C+ 93% RH for 24h.

Test Profile:

Is Power Off \_\_\_\_\_  
Is Power On \_\_\_\_\_

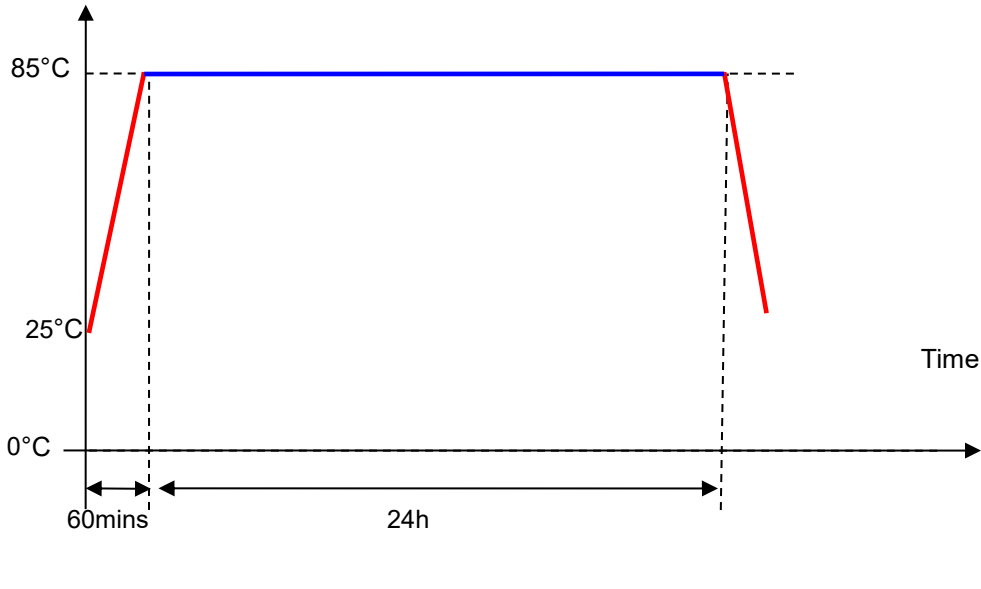

## Test Criteria:


1. After connecting the module, observe the packet reception rate and transmission information on the serial port interface to verify that the module functions normally.
2. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.

Sample Quantity	Test Data	Test Result
4PCS		PASS

## 8. AC Power On/Off Test with Temperature

- Test Conditions:**
1. Power on: 30s; power off: 30s.
  2. Temperature: -40°C, 25°C + 93% RH, 85°C + 93% RH.
  3. Cycle: Each test condition cycles 200 times.

**Test Profile:**

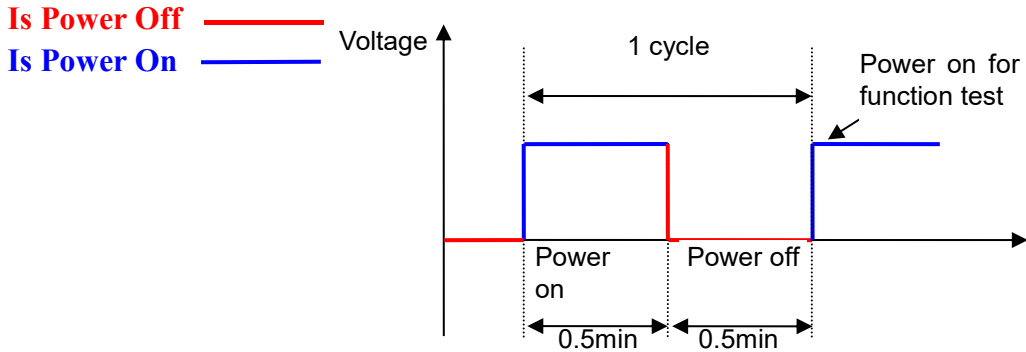

**Test Criteria:**

1. After connecting the module, observe the packet reception rate and transmission information on the serial port interface to verify that the module functions normally.
2. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.

Item	Sample Quantity	Test Data	Test Results
Power on/off at room temperature	4PCS		PASS
Power on/off at low temperature	4PCS		PASS
Power on/off at high temperature	4PCS		PASS

## 9. Alternating Hot and Humid Test


### Test Conditions:

1. Operate at 85°C + 93% RH for 4h;
  2. Operate at 25°C + 93% RH for 4h;
- Cycle step 1 and step 2, a total of 2 cycles.

### Test Profile:

Is Power Off —

Is Power On —

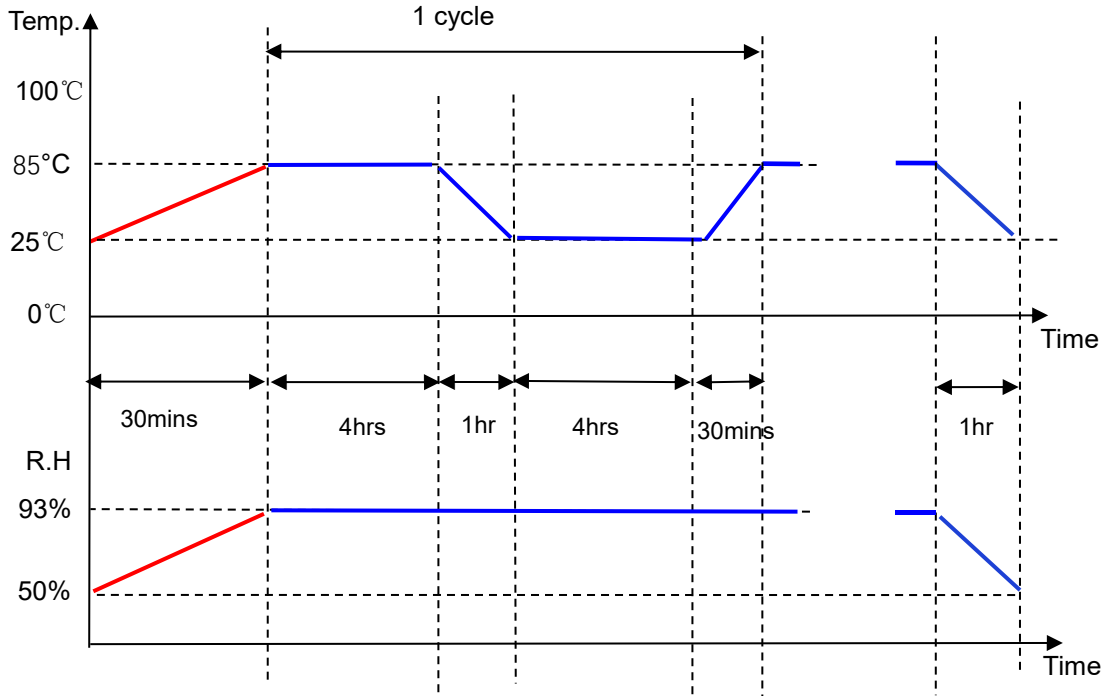

### Test Criteria:

1. After connecting the module, observe the packet reception rate and transmission on the serial port interface to verify that the module functions normally.
2. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.

Sample Quantity	Test Data	Test Result
4PCS		PASS


# 10. Thermal Shock Test

## Test Conditions:

Power-off test. Temperature cycling between -40~100°C + 93% RH, with a heating time of 50min and a cooling time of 2h. Each stage is held for 30min, for a total of 5 cycles.

## Test Profile:

Is Power Off  
Is Power On

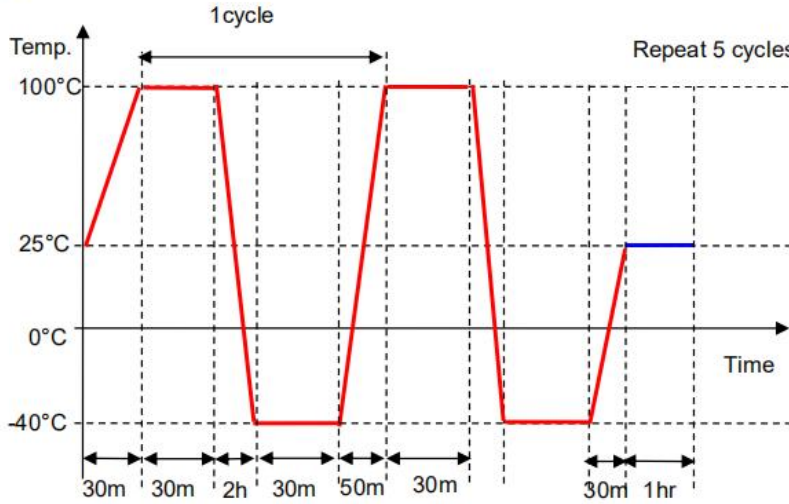

## Test Criteria:

1. After connecting the module, observe the packet reception rate and transmission information on the serial port interface to verify that the module functions normally.
2. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.

Sample Quantity	Test Data	Test Result
4PCS		PASS