

# Reliability Test Report

<b>Product Name:</b>	<u>Rd-01</u>
<b>Product Model:</b>	<u>Radar Series</u>
<b>Test Date:</b>	<b>2023.04.06–2023.04.12</b>
<b>Tested by:</b>	<b>Liu Qun</b>
<b>Reviewed by:</b>	<b>Lu Xingui</b>




## 1. Inspection Standard

No.	Process Name	Inspection Item	Inspection Equipment	Sampling Level (Refer to GB/T 2828.1-2012)	Acceptable Quality Level		
					CR (Critical Defect)	MA (Major Defect)	MI (Minor Defect)
1	Reliability test	High/low temperature storage; high/room/low temperature power on/off; high/low temperature operation; alternating hot and humid; thermal shock	Constant temperature and humidity chamber	Normal single sampling, special inspection S-1	0 accept, 1 reject		

## 2. Test Items

No.	Item	Test Conditions
1	Low temperature storage test	Test conditions: -40°C Test duration: 8h After an 8-hour soak at -40°C, perform a cold start test.
2	High temperature storage test	Test conditions: 100°C + 93% RH Test duration: 8h After restoring to 85°C and a 1-hour soak, perform a hot start test.
3	Low temperature operation test	Test conditions: -40°C Test duration: 24h
4	High temperature operation test	Test conditions: 85°C + 93% RH Test duration: 24h
5	AC power on/off test with temperature	A) Temperature: -40°C B) Temperature: 25°C + 93% RH C) Temperature: 85°C + 93% RH Cycle each condition 200 times, with 30s ON and 30s OFF
6	Alternating hot and humid test	A) Operate at 85°C + 93% RH for 4h; B) Operate at 25°C + 93% RH for 4h; Cycle steps A and B for a total of 2 cycles.
7	Thermal shock test	Test conditions: -40°C–100°C + 93% RH, soak for 30min at each temperature Temperature transition time: 50min for heating, 2h for cooling. Test duration: 5 cycles


### 3. Test Preparation

No.	Item	Image/Attachment
1	Reliability documentation	 <p>Rd-01模组 可靠性WIFI&amp;蓝牙</p>
2	Test equipment	
3	Sample placement	
4	Test reason	New product pilot production

## 4. Low Temperature Storage Test

**Test Conditions:** Power-off test. Store the product at  $-40^{\circ}\text{C}$  for 8h, then perform a cold start test.

**Test Profile:**

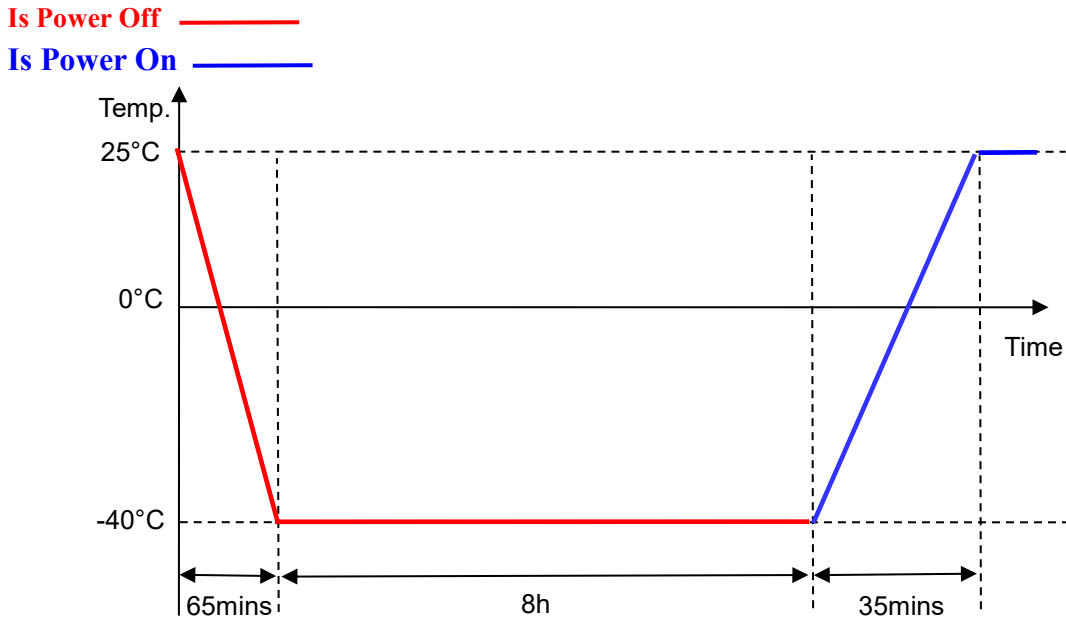

### Test Criteria:

1. During the cold start test, the module functions normally. If ping packets are confirmed not to be lost, the module is considered to be functional.
2. Send commands to enable Bluetooth during cold start. If Bluetooth can be discovered successfully, the Bluetooth function is considered normal.
3. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.


Sample Quantity	Test Data	Test Results
6PCS		PASS

## 5. High Temperature Storage Test

**Test Conditions:** Power-off test. Store the product at 100°C + 93% RH for 8h, then restore it to 85°C + 93% RH for a 1-hour soak, and perform a hot start test.

**Test Profile:**

Is Power Off —  
Is Power On —

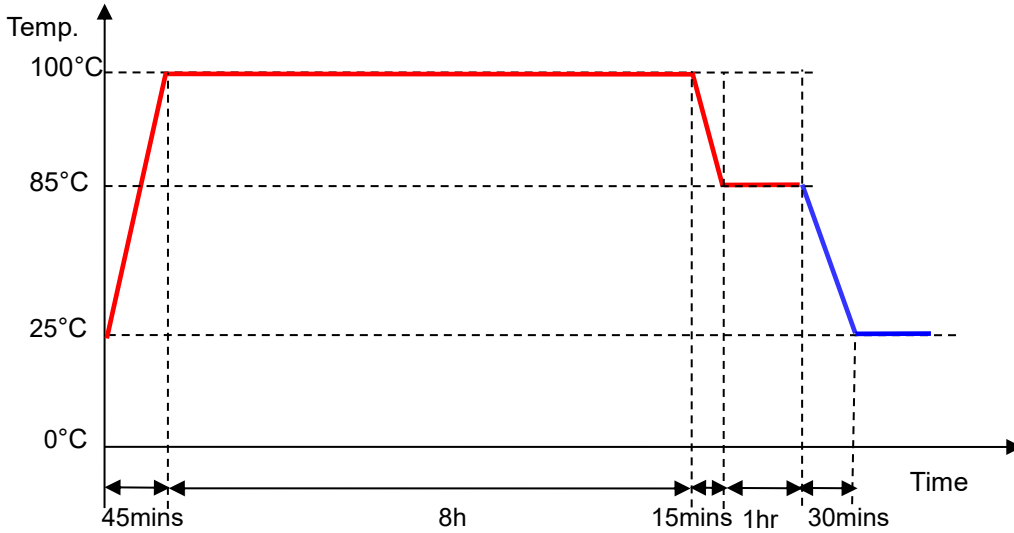

### Test Criteria:

1. During the hot start test, the module functions normally. If ping packets are confirmed not to be lost, the module is considered to be functional.
2. Send commands to enable Bluetooth during hot start. If Bluetooth can be discovered successfully, the Bluetooth function is considered normal.
3. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.


Sample Quantity	Test Data	Test Results
6PCS		PASS

## 6. Low Temperature Operation Test

Test Conditions: Power-on test. Operate at -40°C for 24h.

Test Profile:

Is Power Off —  
Is Power On —

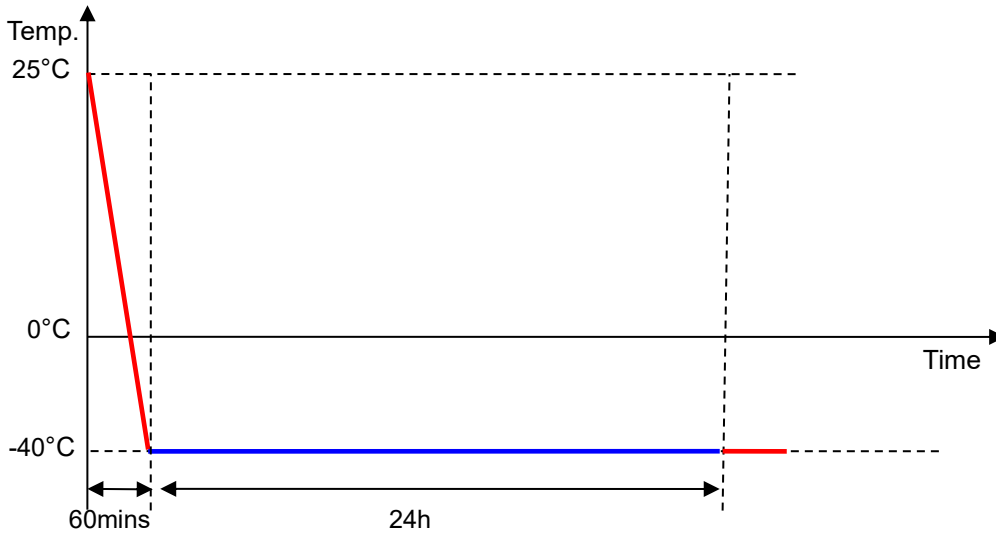

### Test Criteria:

1. No network disconnections occurred during the test. If ping packets are confirmed not to be lost, the module is considered to be functional.
2. Send commands to enable Bluetooth during the test. If Bluetooth can be discovered successfully, the Bluetooth function is considered normal.
3. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.

Sample Quantity	Test Data	Test Results
6PCS		PASS


## 7. High Temperature Operation Test

Test Conditions: Operate at 85°C+ 93% RH for 24h.

Test Profile:

Is Power Off \_\_\_\_\_

Is Power On \_\_\_\_\_

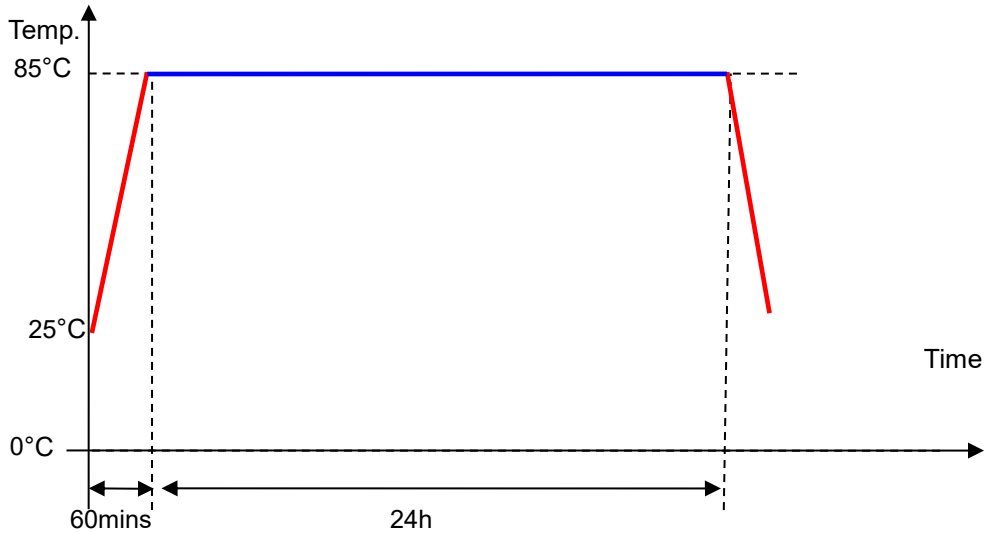

### Test Criteria:


1. No network disconnections occurred during the test. If ping packets are confirmed not to be lost, the module is considered to be functional.
2. Send commands to enable Bluetooth during the test. If Bluetooth can be discovered successfully, the Bluetooth function is considered normal.
3. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.

Sample Quantity	Test Data	Test Results
6PCS	<p>The test data section contains two screenshots. The top screenshot shows three windows of ATKMPNG ping test results. Each window displays 'Ping 统计信息' (Ping Statistics) with columns for 'Ping 最小值' (Ping Min), 'Ping 最大值' (Ping Max), 'Ping 平均值' (Ping Avg), and 'Ping 成功率' (Ping Success Rate). The success rates are consistently 100%. The bottom screenshot shows a 'BLE调试助手' (BLE Debug Assistant) app with a 'Scanner' tab. It lists several Bluetooth devices (BL-AT1 to BL-AT5) with their MAC addresses and signal strengths (e.g., -52 dBm, -53 dBm, -55 dBm, -54 dBm, -60 dBm, -54 dBm). All devices are marked as 'NOT BONDED'.</p>	PASS

## 8. AC Power On/Off Test with Temperature

- Test Conditions:**
1. Power on: 30s; power off: 30s.
  2. Temperature: -40°C, 25°C + 93% RH, 85°C + 93% RH.
  3. Cycle: Each test condition cycles 200 times.

**Test Profile:**

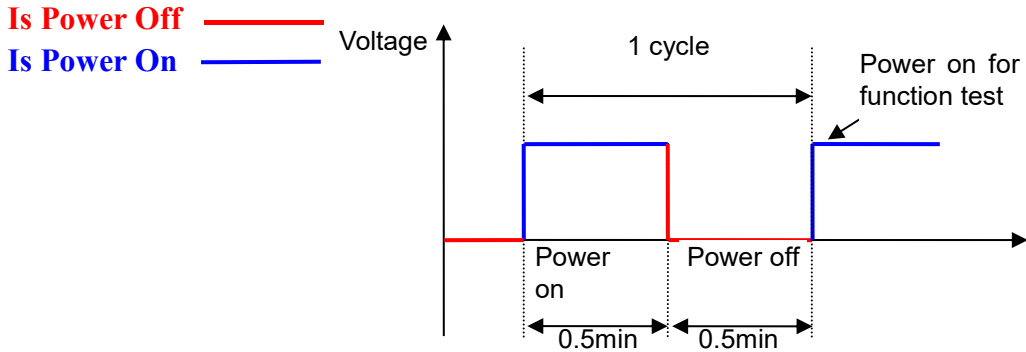

**Test Criteria:**

1. After power-up, the module boots normally. If ping packets are confirmed not to be lost, the module is considered to be functional.
2. Send commands to enable Bluetooth after power-on. If Bluetooth can be discovered successfully, the Bluetooth function is considered normal.
3. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.

Item	Sample Quantity	Test Data	Test Results
Power on/off at room temperature	6PCS		PASS
Power on/off at low temperature	6PCS		PASS
Power on/off at high temperature	6PCS		PASS


## 9. Alternating Hot and Humid Test

### Test Conditions:

1. Operate at 85°C + 93% RH for 4h;
  2. Operate at 25°C + 93% RH for 4h;
- Cycle step 1 and step 2, a total of 2 cycles.

### Test Profile:

Is Power Off —  
Is Power On —

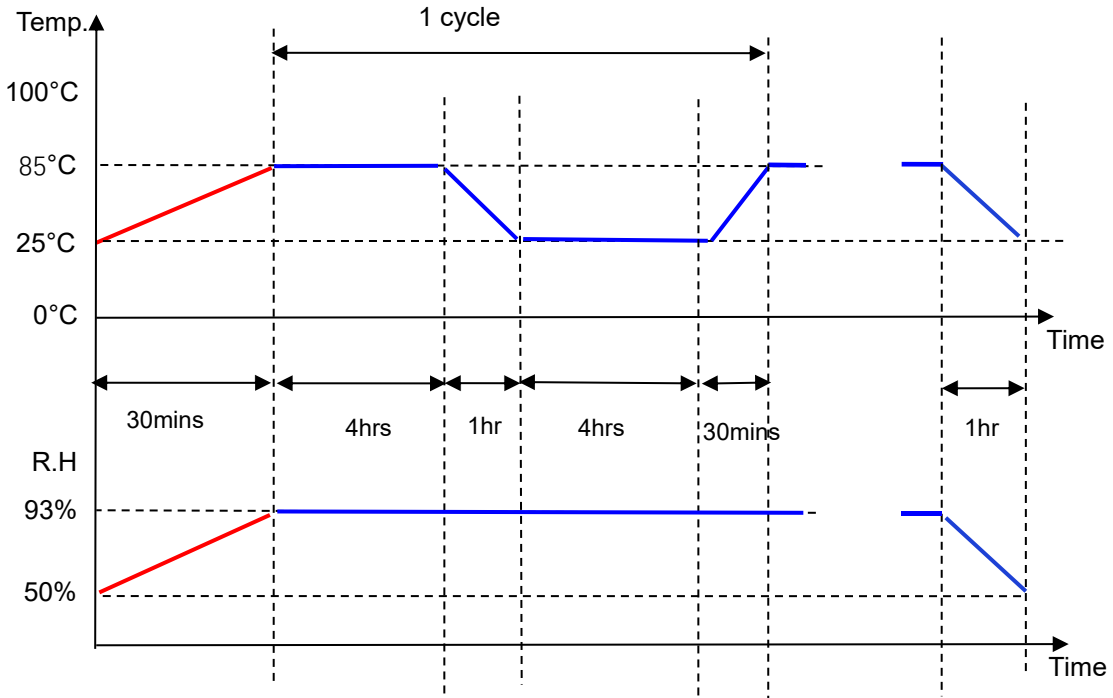

### Test Criteria:

1. No network disconnections occurred during the test. If ping packets are confirmed not to be lost, the module is considered to be functional.
2. Send commands to enable Bluetooth during the test. If Bluetooth can be discovered successfully, the Bluetooth function is considered normal.
3. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.


Sample Quantity	Test Data	Test Results
6PCS		PASS

# 10. Thermal Shock Test

## Test Conditions:

Power-off test. Temperature cycling between -40–100°C + 93% RH, with a heating time of 50min and a cooling time of 2h. Each stage is held for 30min, for a total of 5 cycles.

## Test Profile:

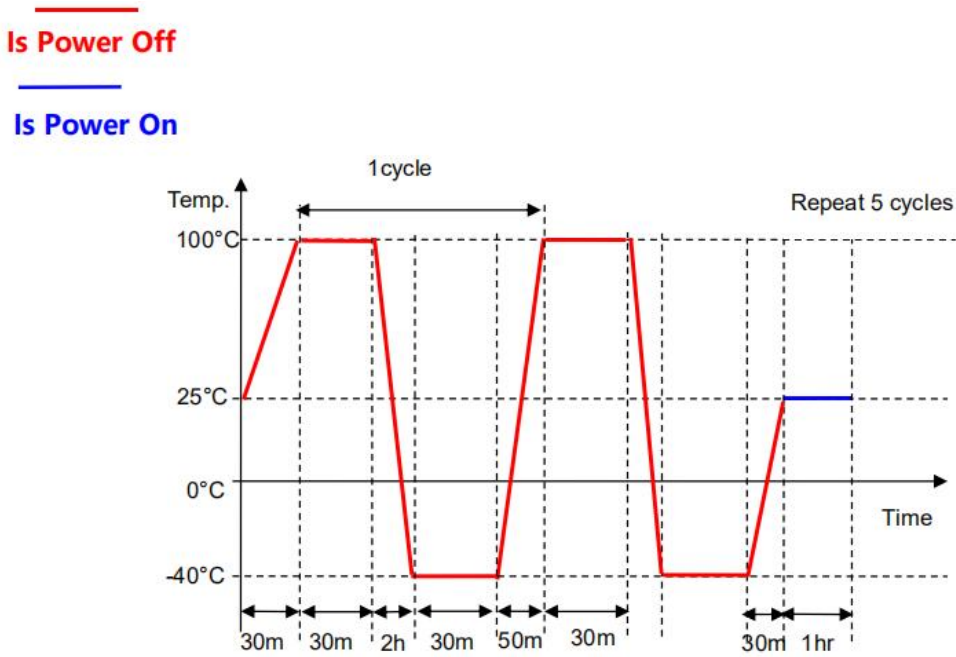

## Test Criteria:

1. After power-up, the module boots normally. If ping packets are confirmed not to be lost, the module is considered to be functional.
2. Send commands to enable Bluetooth after power-on. If Bluetooth can be discovered successfully, the Bluetooth function is considered normal.
3. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.


Sample Quantity	Test Data	Test Results
6PCS		PASS

# 11. Radar Test

**Test Conditions:** Test a single module at room temperature after power-on.

**Test Criteria:**

1. When a person approaches the module, if the detected value changes and the red line fluctuates, it indicates that the radar is operating normally. If the red line does not fluctuate and the detected value does not change, the test is considered failed. Note that the person should not be too far from the module; walking within 3 meters is sufficient.

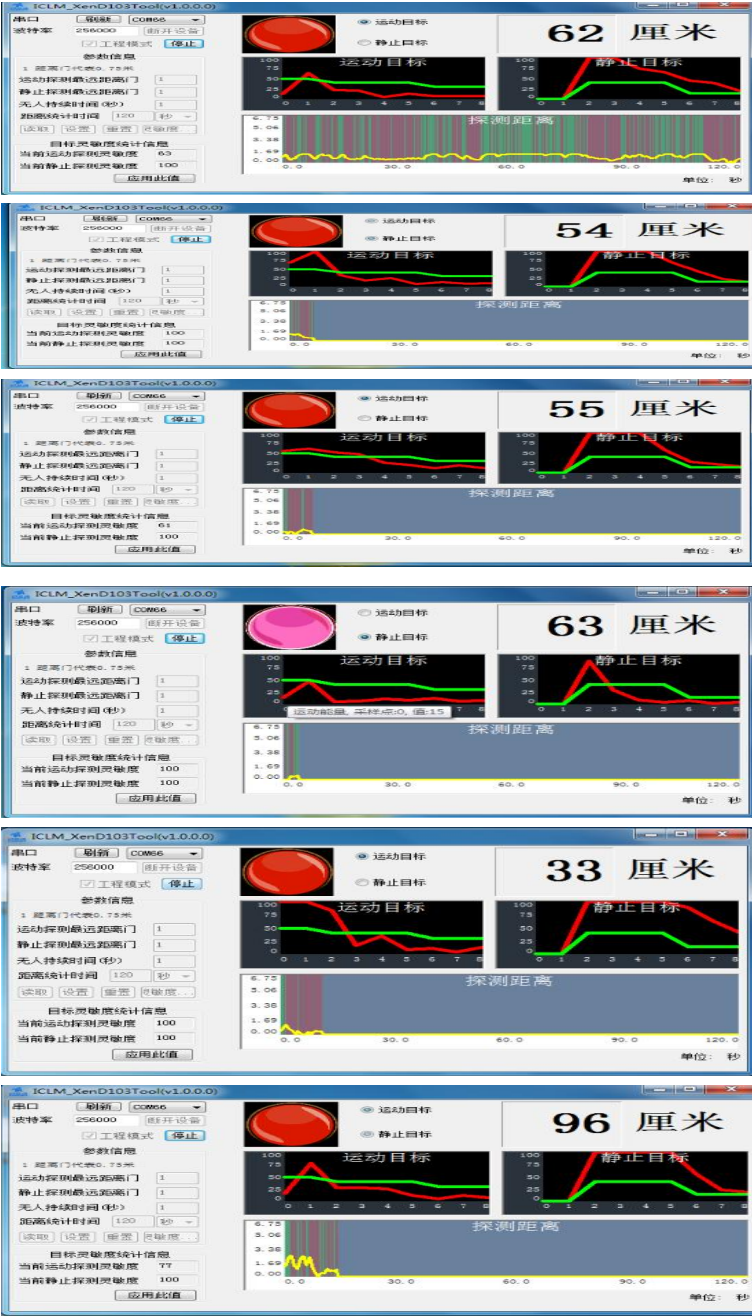Sample Quantity	Test Data	Test Results
6PCS		PASS