


BW60-07S Specification

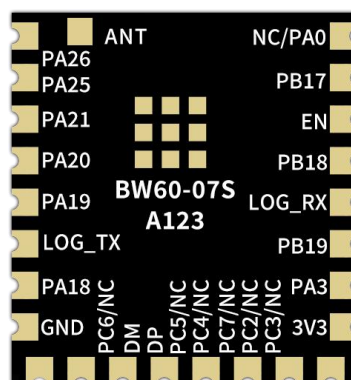

Product Series: Wi-Fi Series

Product Model: BW60-07S

Version: V1.0.0

Copyright: ©2026

Document Language: English

Release Date: 2026-09-22

Confidentiality Level: Public Document

Manufacturer: Shenzhen Ai-Thinker Technology Co., Ltd.

Keywords: RTL8711FA, Dual-Core Cortex-M55-Compatible Architecture, Up to 240MHz Clock Frequency, Wi-Fi 6, BLE 5.4, Dual-Band 2.4GHz/5GHz, IEEE 802.11a/b/g/n/ac/ax

Document Revision History

Version	Date	Created / Revised Content	Prepared by	Approved by
V1.0.0	2026-09-22	First edition	Wang Yeqing	Guan Ning

Contents

1 Product Overview	5
1.1 Features	6
1.2 Application Scenarios	7
2 Key Specifications	8
3 Electrical Characteristics	9
3.1 Recommended Operating Conditions	9
3.2 I/O DC Electrical Characteristics	9
3.3 Electrostatic Discharge	9
3.4 Wi-Fi RF Performance	10
3.5 BLE RF Performance	11
3.6 Power Consumption	12
4 Mechanical Specifications	13
4.1 Module Dimensions	13
4.2 Shield Cover Marking Information	14
4.3 External Antenna Connector Dimensions	15
5 Pin Definition	16
6 Schematic	18
7 Design Guide	19
7.1 Application Reference Circuit	19
7.2 Recommended PCB Footprint Dimensions	20
7.3 Power Supply	21
7.4 GPIO	22
8 Storage Conditions	23
9 Reflow Soldering Profile	23
10 Packaging Information	24
11 Contact Us	24
Disclaimer	25

List of Figures

Figure 1	Main Chip Architecture Diagram	5
Figure 2	ESD Protection Diagram	9
Figure 3	Module Dimensions (Unit: mm)	13
Figure 4	Shield Cover Marking Information	14
Figure 5	External Antenna Connector Dimensions (Unit: mm)	15
Figure 6	Pin Diagram	16
Figure 7	Schematic	18
Figure 8	Application Reference Circuit	19
Figure 9	Recommended PCB Footprint Dimensions (Unit: mm)	20
Figure 10	DC-DC Buck Circuit	21
Figure 11	Level-Shifting Circuit	22
Figure 12	Reflow Soldering Profile	23
Figure 13	Tape and Reel Packaging Diagram	24

List of Tables

Table 1	Key Specifications	8
Table 2	Recommended Operating Conditions	9
Table 3	I/O DC Electrical Characteristics	9
Table 4	Wi-Fi RF Performance	10
Table 5	BLE RF Performance	11
Table 6	Power Consumption	12
Table 7	Pin Function Definition	16

1 Product Overview

The BW60-07S is a dual-band Wi-Fi + BLE SoC module developed by Shenzhen Ai-Thinker Technology Co., Ltd. based on the RTL8711FA series chip. It integrates Wi-Fi 6 and BLE 5.4, supporting 2.4GHz and 5GHz dual bands and 802.11a/b/g/n/ac/ax protocols. The RTL8711FA integrates dual RISC cores compatible with the Arm Cortex-M55 instruction set and based on Armv8.1-M architecture. With a maximum clock frequency of 240MHz, it features fine-grained clock gating, multi-power modes and dynamic power adjustment, balancing high performance and ultra-low power consumption.

The BW60-07S module features a rich set of peripheral interfaces, integrating general-purpose and sensor interfaces such as UART, SPI, I2C, CAN, ADC, RMII, capacitive touch, and temperature control. It is equipped with SDIO and USB high-speed interfaces, along with DMIC and I2S audio interfaces, and the GPIOs are flexibly configurable. It can be widely applied in IoT, mobile devices, wearable electronics, smart home and other scenarios.

Figure 1 shows the RTL8711FA main chip architecture.

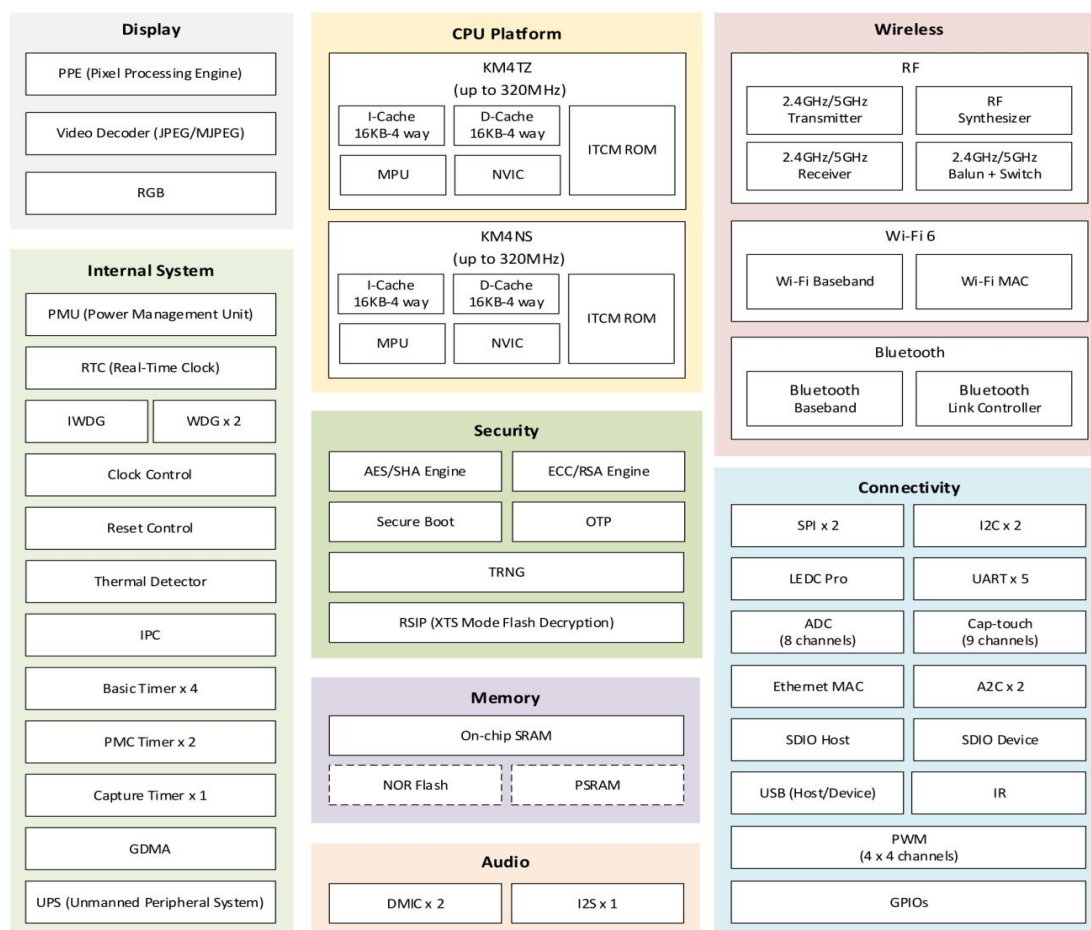


Figure 1 Main Chip Architecture Diagram

1.1 Features

Wireless

- 2.4GHz and 5GHz RF transceiver
- Supports 802.11a/b/g/n/ac/ax protocols
- Supports BLE 5.4
- Supports LE 1Mbps, 2Mbps
- Supports LE long-range (125kbps, 500kbps)

Microcontroller Subsystem

- Dual 32-bit RISC cores based on the Armv8.1-M architecture
- Compatible with the Arm Cortex-M55 instruction set
- Maximum clock frequency up to 240MHz

Memory

- 16 KB I-Cache and 16 KB D-Cache
- 512KB + 152KB SRAM
- 2KB OTP
- 4/8 MB on-chip Flash in the RTL8711FA chip (optional)
- Supports external Flash expansion (customized)

Security

- Secure Boot
- AES/SHA engine
- ECC/RSA engine
- TRNG (True Random Number Generator)
- OTP

Peripherals

- Supports USB, SPI, UART, ADC, CAN, I2C, I2S, DMIC, PWM, SDIO, LEDC, IR, RMII, Cap-touch and GPIO, etc.

Development Environment

- Supports secondary development with integrated Linux development environment

Power Consumption

- Receive current: 51mA
- Transmit current: 2.4GHz, 802.11ax, MCS9, POUT=+13dBm, Duty 100%: 216mA (average)
- Transmit current: 5.8GHz, 802.11ax, MCS9, POUT=+13dBm, Duty 100%: 285mA (average)
- Deep Sleep Current: 10 μ A

Physical Characteristics

- Package: SMD-25
- Module dimensions (L $\times$ W $\times$ H): 17.00 $\times$ 16.00 $\times$ 3.20mm
- Antenna type: IPEX Gen 4 connector / PAD antenna
- Operating temperature: -40 – 85 $^{\circ}$ C
- Storage conditions: -40 – 125 $^{\circ}$ C, < 90% RH

Electrical Characteristics

- Supply voltage: 2.97 – 3.63V (typical value 3.3V)
- Supply current: > 500mA
- Communication interface: standard UART interface
- Available I/Os: 21 GPIOs by default
- Protection: built-in ESD protection circuit

Note: For features not marked, please refer to the official RTL8711FA chip datasheet.

1.2 Application Scenarios

- Smart Home
- Educational / Children's Toys
- Industrial Equipment Interaction
- Wearable Electronics
- Internet of Things (IoT)
- Audio Multimedia
- Mobile Devices

2 Key Specifications

Table 1 summarizes the key electrical and physical parameters of the BW60-07S module.

Table 1 Key Specifications

Model	BW60-07S
Package	SMD-25
Dimensions	17.00 × 16.00 × 3.20mm
Antenna Type	IPEX Gen 4 connector / PAD antenna
Frequency Range	2400 – 2483.5MHz and 5180 – 5825MHz
Operating Temperature	-40 – 85°C
Storage Conditions	-40 – 125°C,
Power Supply Range	Supply voltage 2.97 – 3.63V, typical 3.3V, supply current >500mA
Available I/Os	21 by default
UART Baud Rate	115200bps by default
Security	Secure Boot, Public Key Engine, TRNG, OTP
Flash	4MByte by default, up to 16MByte

3 Electrical Characteristics

3.1 Recommended Operating Conditions

Table 2 lists the recommended operating electrical parameters of the BW60-07S module. Operating outside these ranges may cause device damage.

Table 2 Recommended Operating Conditions

Symbol	Parameter	Min	Typ	Max	Unit
VCC	Supply Voltage	2.97	3.3	3.63	V
I	Supply Current	500	-	-	mA

3.2 I/O DC Electrical Characteristics

Table 3 lists the I/O DC characteristics of the BW60-07S module. These parameters are mainly used for external interface level matching and GPIO circuit design.

Table 3 I/O DC Electrical Characteristics

Symbol	Parameter	Min	Typ	Max	Unit
VIH	High-level Input Voltage	2	-	-	V
VIL	Low-level Input Voltage	-0.3	-	0.8	V
VOH	High-level Output Voltage	-	$0.85 \times VCC$	-	V
VOL	Low-level Output Voltage	-	$0.15 \times VCC$	-	V
I _{IN}	I/O Input Leakage Current	-	-	100	nA

3.3 Electrostatic Discharge

Figure 2 shows the ESD protection diagram. BW60-07S is an ESD-sensitive device and requires special precautions during handling.



Figure 2 ESD Protection Diagram

3.4 Wi-Fi RF Performance

Table 4 lists the Wi-Fi RF performance parameters of the BW60-07S module. RF performance parameters are measured under typical test conditions. Actual performance may be affected by the antenna, power supply, PCB layout, test environment, and other factors.

Table 4 Wi-Fi RF Performance

Description	Typ			Unit
Frequency Range	2400 – 2483.5			MHz
2.4GHz Output Power				
Mode	Min	Typ	Max	Unit
802.11b, 1Mbps	-	21	-	dBm
802.11b, 11Mbps	-	18	-	dBm
802.11g, 6Mbps	-	20	-	dBm
802.11g, 54Mbps	-	18	-	dBm
802.11n, HT20 (MCS7)	-	18	-	dBm
802.11ax, HE20 (MCS9)	-	16	-	dBm
2.4GHz Receiver Sensitivity				
Mode	Min	Typ	Max	Unit
802.11b, 1Mbps	-	-99	-	dBm
802.11b, 11Mbps	-	-90	-	dBm
802.11g, 6Mbps	-	-95	-	dBm
802.11g, 54Mbps	-	-77	-	dBm
802.11n, HT20 (MCS7)	-	-75.5	-	dBm
802.11ax, HE20 (MCS9)	-	-68.5	-	dBm
Description	Typ			Unit
Frequency Range	5180 – 5825			MHz
5GHz Output Power				
Mode	Min	Typ	Max	Unit

802.11a, 6Mbps	-	18	-	dBm
802.11a, 54Mbps	-	18	-	dBm
802.11n, HT20 (MCS7)	-	18	-	dBm
802.11ax, HE20 (MCS9)	-	16	-	dBm
5GHz Receiver Sensitivity				
Mode	Min	Typ	Max	Unit
802.11a, 6Mbps	-	-94	-	dBm
802.11a, 54Mbps	-	-77	-	dBm
802.11n, HT20 (MCS7)	-	-75	-	dBm
802.11ax, HE20 (MCS9)	-	-68	-	dBm

3.5 BLE RF Performance

Table 5 lists the BLE RF performance parameters of the BW60-07S module. RF performance parameters are measured under typical test conditions. Actual performance may be affected by the antenna, power supply, PCB layout, test environment, and other factors.

Table 5 BLE RF Performance

Description	Typ			Unit
Frequency Range	2400 – 2483.5			MHz
Output Power				
Data Rate Mode	Min	Typ	Max	Unit
1Mbps	-	8	15	dBm
2Mbps	-	8	15	dBm
Receiver Sensitivity				
Data Rate Mode	Min	Typ	Max	Unit
1Mbps Sensitivity @30.8% PER	-	-97	-	dBm
2Mbps Sensitivity @30.8% PER	-	-94	-	dBm

3.6 Power Consumption

Table 6 lists the power consumption data of the BW60-07S module in different modes. The following power consumption data are measured under a 3.3V power supply and 25°C ambient temperature.

- The POUT power for all transmit modes is measured at the antenna interface.
- All transmission data are measured at 100% duty cycle in continuous transmit mode.

Table 6 Power Consumption

Mode	Min	Avg	Max	Unit
TX 802.11b, 11Mbps, POUT=+18dBm	-	270	-	mA
TX 802.11g, 54Mbps, POUT=+15dBm	-	232	-	mA
TX 802.11n (2.4GHz), MCS7, POUT=+15dBm	-	230	-	mA
TX 802.11n (5.8GHz), MCS7, POUT=+15dBm	-	303	-	mA
TX 802.11ax (2.4GHz), MCS9, POUT=+13dBm	-	216	-	mA
TX 802.11ax (5.8GHz), MCS9, POUT=+13dBm	-	285	-	mA
RX 802.11b, Packet Length 1500 Bytes	-	47	-	mA
RX 802.11g, Packet Length 1500 Bytes	-	51	-	mA
RX 802.11n, Packet Length 1500 Bytes	-	51	-	mA
RX 802.11ax, Packet Length 1500 Bytes	-	51	-	mA
Deep-Sleep		10		μA

4 Mechanical Specifications

4.1 Module Dimensions

Figure 3 shows the outline dimensions of the BW60-07S module. The outline dimensions (L × W × H) are 17.00 × 16.00 × 3.20mm. The dimensional tolerance is ±0.20mm.

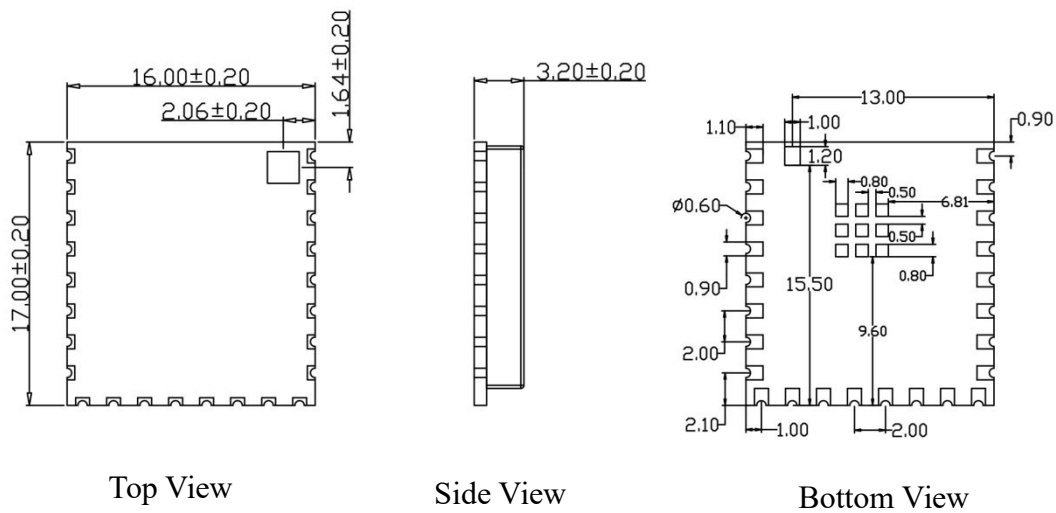


Figure 3 Module Dimensions (Unit: mm)

4.2 Shield Cover Marking Information

Figure 4 shows the shield cover marking information of the BW60-07S module. Each character corresponds to module configuration information such as Flash size, and temperature version.

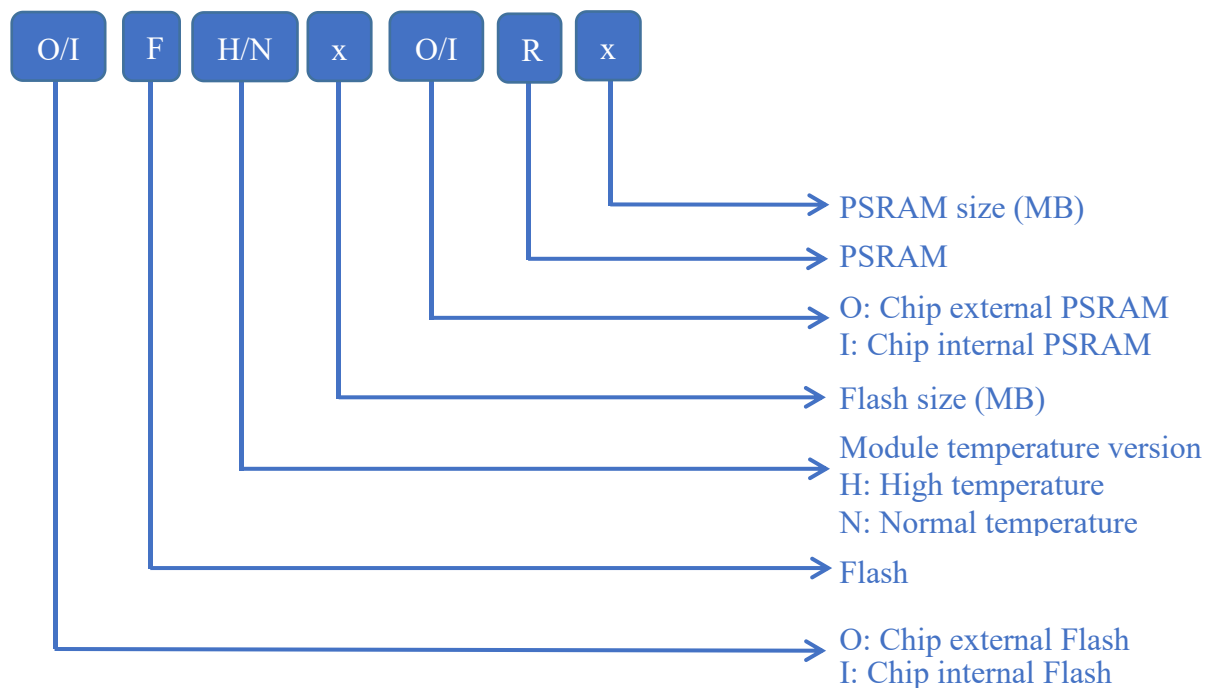


Figure 4 Shield Cover Marking Information

4.3 External Antenna Connector Dimensions

Figure 5 shows the engineering drawing of the IPEX antenna connector used with BW60-07S.

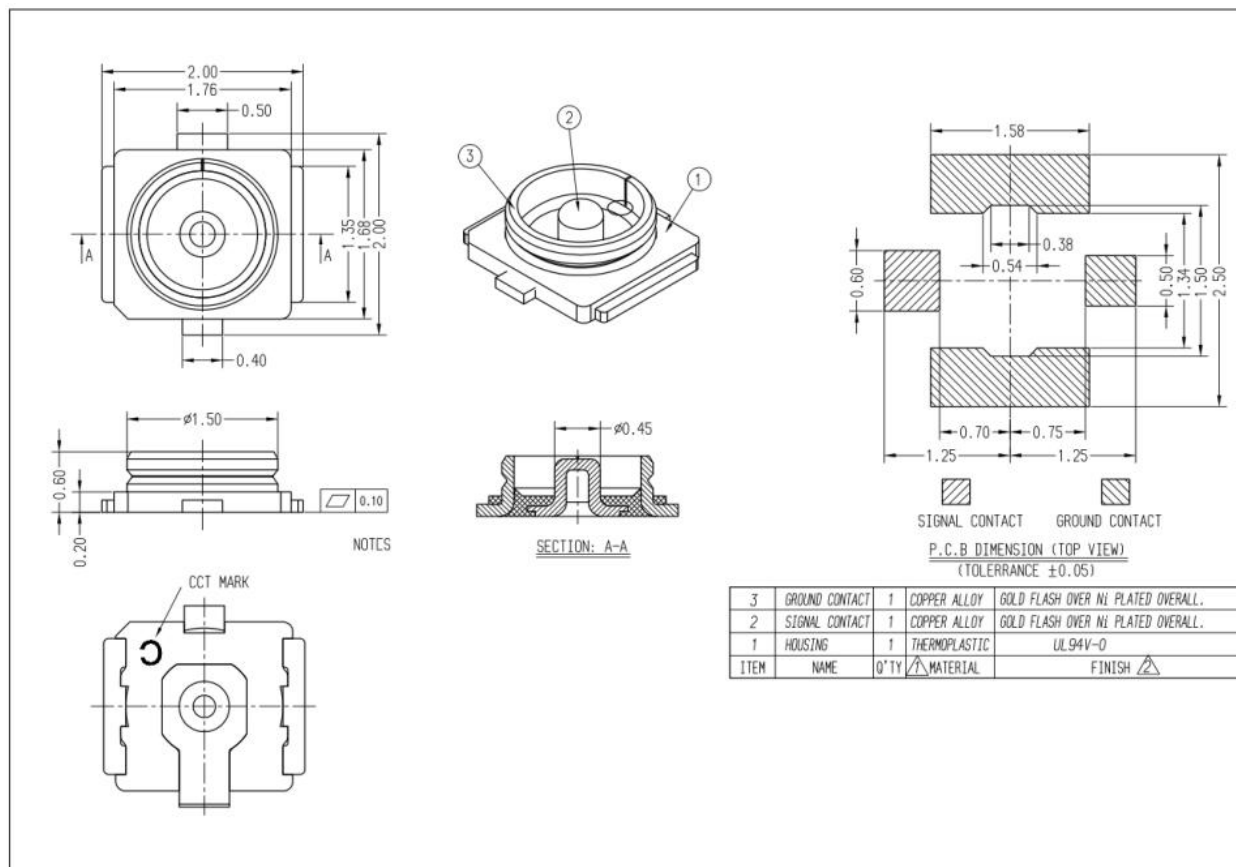


Figure 5 External Antenna Connector Dimensions (Unit: mm)

5 Pin Definition

Figure 6 shows the top and bottom views of the BW60-07S module's pin layout, with a total of 25 pins exposed.

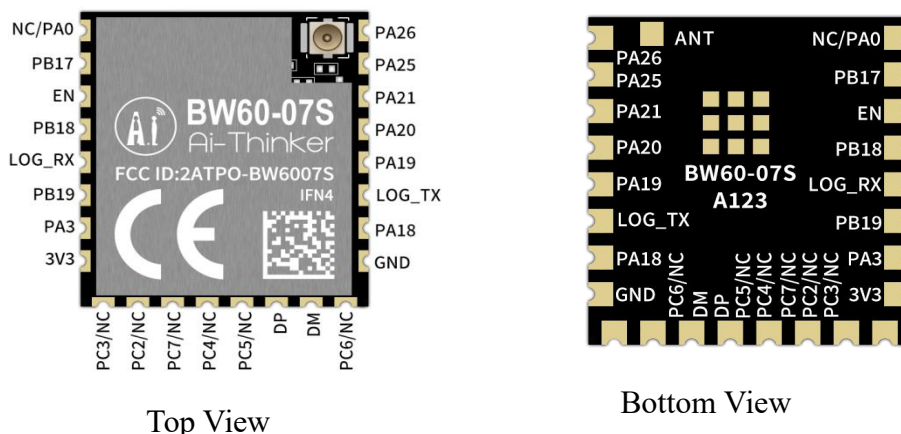


Figure 6 Pin Diagram

Table 7 defines the pin functions of the BW60-07S module, including pin number, pin name, and function description.

Table 7 Pin Function Definition

No.	Name	Function
1	PA0/NC	GPIO/WAKE_PIN3; unavailable on versions with on-chip PSRAM due to internal multiplexing.
2	PB17	GPIO/RMII_RXERR
3	EN	Chip enable; active high.
4	PB18	GPIO/RMII_REF_CLK/SWD_CLK
5	LOG_RX	PA2/OTP_DIS/WAKE_PIN1; programming UART and LOG_RX pin.
6	PB19	GPIO/RMII_RXD1/SWD_DAT
7	PA3	GPIO/WAKE_PIN0
8	3V3	3.3V supply (VCC); the external power supply output current is recommended to be above 500mA.
9	PC3/NC	GPIO/RMII_TXD1/SPI1_MOSI/SD_D0; in the external Flash version, this I/O is shared with the internal Flash and is not brought out.
10	PC2/NC	GPIO/RMII_TXEN/SPI1_CLK/SD_D2; in the external Flash version, this I/O is shared with the internal Flash and is

		not brought out.
11	PC7/NC	GPIO/RMII_RXD0/SD_CLK; in the external Flash version, this I/O is shared with the internal Flash and is not brought out.
12	PC4/NC	GPIO/RMII_TXD0/SPI1_MISO/SD_D1; in the external Flash version, this I/O is shared with the internal Flash and is not brought out.
13	PC5/NC	SPIC(0/1)_FLASH_CLK/GPIO/RMII_CRS_DV/SPI1_CS/SD_D3; in the external Flash version, this I/O is shared with the internal Flash and is not brought out.
14	DP	PA4/HSDP/SPI0_CLK/SWD_CLK/SD_D2
15	DM	PA5/HSDM/SPI0_MOSI/SWD_DAT/SD_D0
16	PC6/NC	SPIC(0/1)_FLASH_D0/RMII_RXD1/SD_CMD; in the external Flash version, this I/O is shared with the internal Flash and is not brought out.
17	GND	Ground
18	PA18	GPIO/ADC2_TOUCH2/TSSI_0/SPI0_MISO/SWD_CLK/SD_CLK
19	LOG_TX	PB20/UD_DIS; Programming UART and LOG_TX pin; also used for boot configuration. See notes below.
20	PA19	GPIO/ADC1_TOUCH1/TSSI_1/SPI0_CS/SWD_DAT/SD_CMD
21	PA20	GPIO/ADC0_TOUCH0/SD_D1
22	PA21	GPIO/TOUCH8/SD_D3
23	PA25	GPIO/TSSI_0/RMII_RXERR
24	PA26	GPIO/TSSI_1/RMII_REF_CLK/SD_D3
25	ANT	PAD antenna port; The PAD antenna is not brought out on IPEX versions.

Notes:

1. Whether pins marked NC (no connection) are available depends on the internal PSRAM and Flash configuration of the module. On the internal PSRAM version, PA0 is unavailable. On the external Flash version, PC2, PC3, PC4, PC5, PC6, and PC7 are unavailable.
2. If LOG_TX is low at the moment of power-on, the module enters programming mode. If LOG_TX is high at the moment of power-on, the module boots normally. The module has an internal pull-up by default.
3. Do not pull PA3 low at the moment of power-on. Pulling it low during startup will cause the module to enter Test Mode.
4. Do not pull PB18 low at the moment of power-on. Pulling it low will prevent the NOR Flash from booting. The module has an internal pull-up by default.

Figure 7 shows the schematic of the BW60-07S module, integrating RF antennas, power supply, clock, and reserved peripheral interfaces.



7 Design Guide

7.1 Application Reference Circuit

Figure 8 shows the hardware application reference circuit of the BW60-07S module, showing the UART communication, power supply, enable control, and firmware download interfaces.

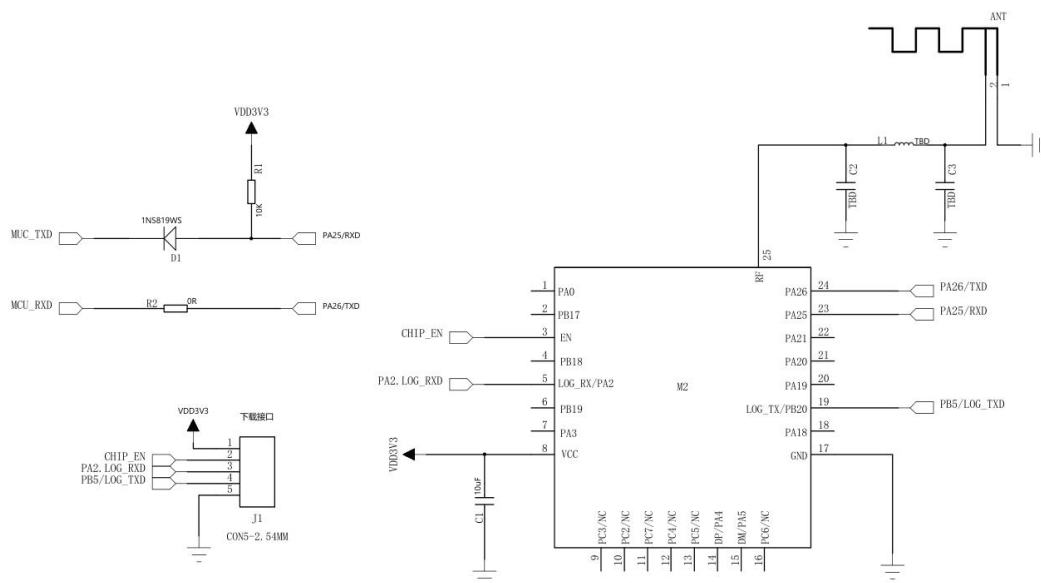


Figure 8 Application Reference Circuit

Notes on the Application Reference Circuit:

- LOG_TX is the boot control pin. When high, the module is in normal operating mode. When low, the module is in firmware programming mode. The chip is internally pulled high by default.
- VCC supply voltage range: 2.97 – 3.63V. The external power supply output current is recommended to be above 500mA.
- The power-on timing requirements for PA3 and PB18 must be met in the design.

7.2 Recommended PCB Footprint Dimensions

Figure 9 shows the recommended PCB footprint dimensions of the BW60-07S module. The pad dimensions (L × W) are 2.20 × 0.90mm. The center-to-center spacing between adjacent pads is 2.00mm.

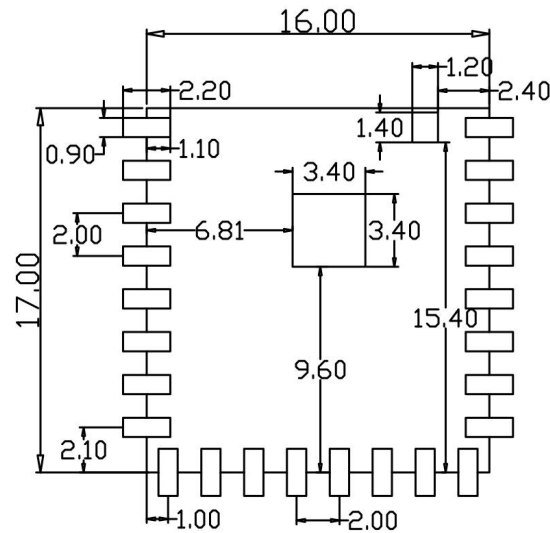


Figure 9 Recommended PCB Footprint Dimensions (Unit: mm)

7.3 Power Supply

Figure 10 shows a DC-DC buck power supply circuit converting 12V to 3.3V, with a maximum output current of 2A.

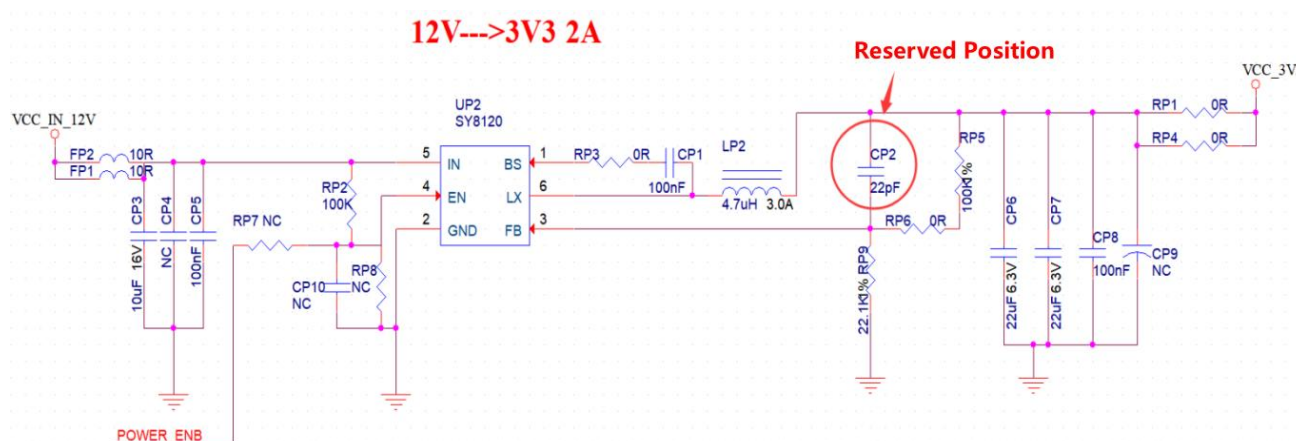


Figure 10 DC-DC Buck Circuit

Notes on the DC-DC Buck Circuit:

- Recommended VCC voltage: 3.3V; recommended current > 500mA.
- An LDO is recommended for power supply; if using DC-DC, the ripple should be controlled within 30mV.
- For the DC-DC power supply circuit, it is recommended to reserve space for dynamic response capacitors to optimize output ripple under large load transients.
- It is recommended to add ESD protection devices to the power interface.

7.4 GPIO

Figure 11 shows a 3.3V and 5V bidirectional UART level-shifting circuit, which supports bidirectional serial communication across different voltage levels.

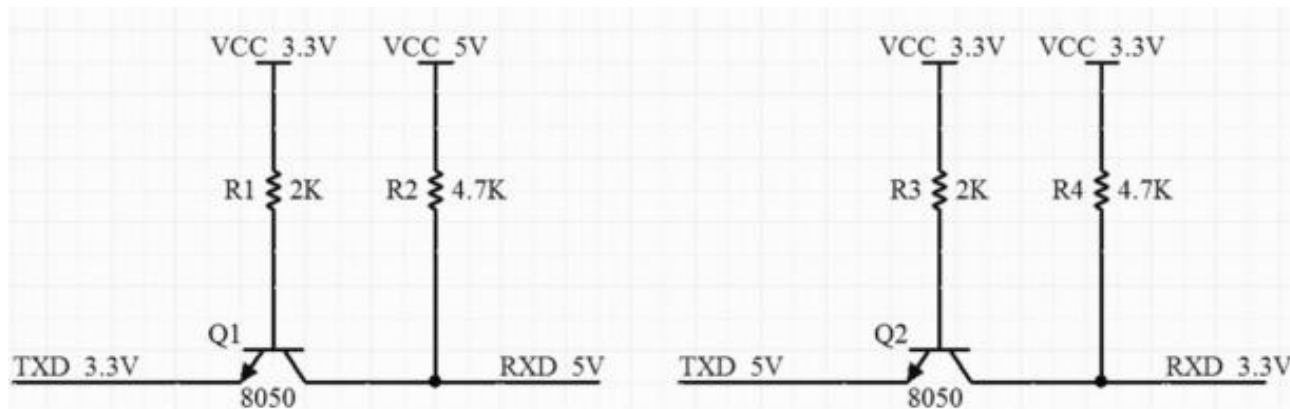


Figure 11 Level-Shifting Circuit

Notes on the Level-Shifting Circuit:

- Some I/O pins are exposed on the module. To use these I/O pins, it is recommended to connect a 10-100Ω resistor in series with each I/O pin. This helps suppress overshoot, stabilize signal levels, and benefits both EMI and ESD protection.
- The pull-up or pull-down configuration for special I/O pins must refer to the instructions in the specification, as it affects the module boot configuration.
- The module I/O pins level is 3.3V. If the host controller I/O voltage level does not match the module, a level-shifting circuit should be added.
- If an I/O pin is directly connected to a peripheral interface or pin headers, it is recommended to reserve space for an ESD protection device near the connector on the I/O trace.

8 Storage Conditions

Products sealed in moisture barrier bags should be stored in a non-condensing atmosphere at $< 40^{\circ}\text{C}$ and $< 90\% \text{ RH}$.

The moisture sensitivity level (MSL) of the module is level 3.

The module must be used within 168 hours after vacuum bag removal under conditions of $25 \pm 5^{\circ}\text{C}$ and $60\% \text{ RH}$. Otherwise, the module requires baking before being returned to production.

9 Reflow Soldering Profile

Figure 12 shows the module reflow soldering process profile. The process is divided into four stages: ramp-up zone, preheat/soak zone, reflow soldering zone and cooling zone.

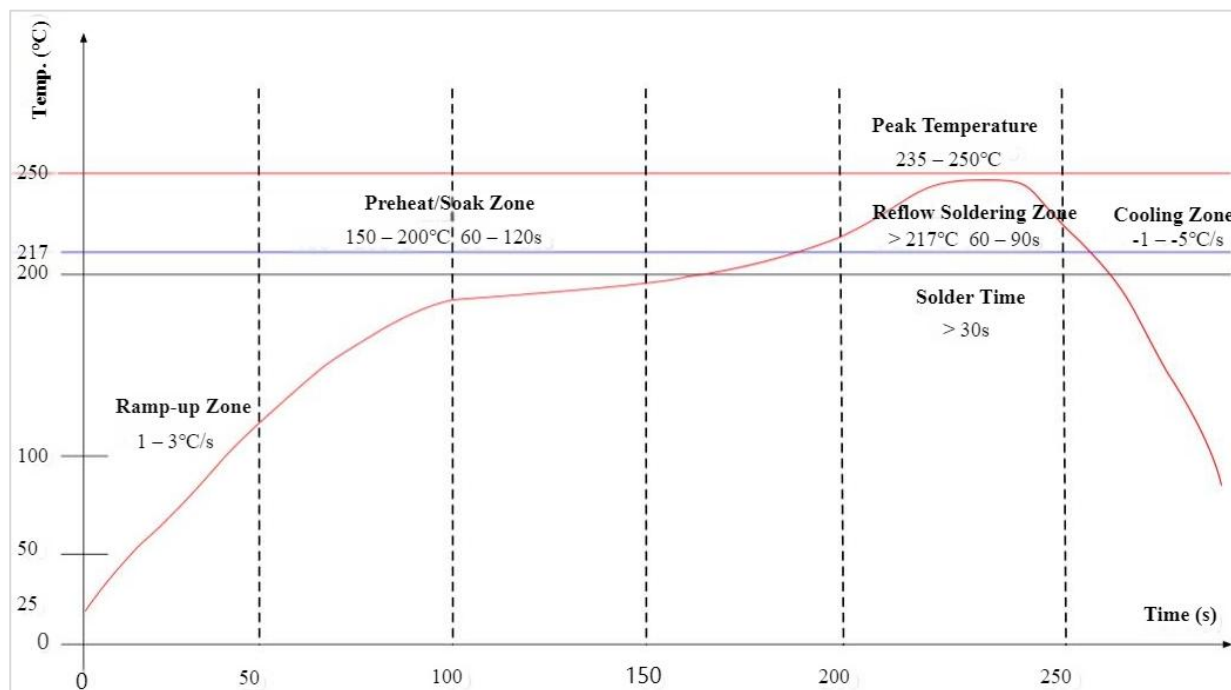


Figure 12 Reflow Soldering Profile

Reflow Soldering Profile Description:

- Ramp-up zone – Temperature: $25 - 150^{\circ}\text{C}$, Time: 60 – 90s, Ramp rate: $1 - 3^{\circ}\text{C/s}$
- Preheat/soak zone – Temperature: $150 - 200^{\circ}\text{C}$, Time: 60 – 120s
- Reflow soldering zone – Temperature: $> 217^{\circ}\text{C}$, Time: 60 – 90s, Peak temperature: $235 - 250^{\circ}\text{C}$, Time: 30 – 70s
- Cooling zone – Temperature: peak temperature to 180°C , Cooling rate: $-1 - -5^{\circ}\text{C/s}$
- Solder – Sn-Ag-Cu lead-free solder alloy (SAC305)

10 Packaging Information

Figure 13 shows the packaging of the BW60-07S module. The module is packed in tape-and-reel, 800 pcs/reel.



Figure 13 Tape and Reel Packaging Diagram

11 Contact Us

[Official Website](#)

[Official Forum](#)

[Development DOCS](#)

[LinkedIn](#)

[Tmall Store](#)

[Taobao Store](#)

[Alibaba Store](#)

[Technical Support: support@aithinker.com](mailto:support@aithinker.com)

[Domestic Business Cooperation: sales@aithinker.com](mailto:sales@aithinker.com)


[Overseas Business Cooperation: overseas@aithinker.com](mailto:overseas@aithinker.com)

Company Address: Room 403–405, 408–410, Building C, Huafeng Smart Innovation Port, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Contact Hotline: 0755-29162996



WeChat Mini Program

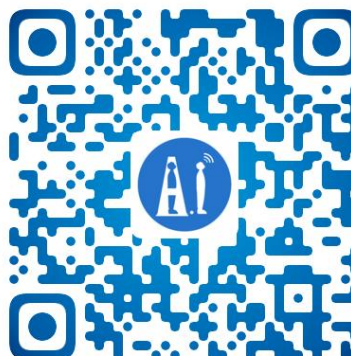

WeChat Official Account

Disclaimer

The data contained in this specification are typical test values obtained by Ai-Thinker laboratory and are provided for reference only. Actual performance may vary depending on the application environment and shall be subject to actual verification. Ai-Thinker reserves the right to modify this document at any time. Please refer to the official documentation website for the latest version. To the maximum extent permitted by applicable laws and regulations, Ai-Thinker shall not be liable for any losses arising from the use of this specification. All trademarks mentioned herein are the property of their respective owners. No part of this specification may be reproduced or used for commercial promotion without prior written permission. This specification does not grant any license to any intellectual property rights.