

# Reliability Test Report

<b>Product Name:</b>	<b>TB-05</b>
<b>Product Model:</b>	<b><u>Bluetooth Series</u></b>
<b>Test Date:</b>	<b>2023.08.07–2023.08.15</b>
<b>Tested by:</b>	<b>Lai Zongsheng</b>
<b>Reviewed by:</b>	<b>Lu Xingui</b>


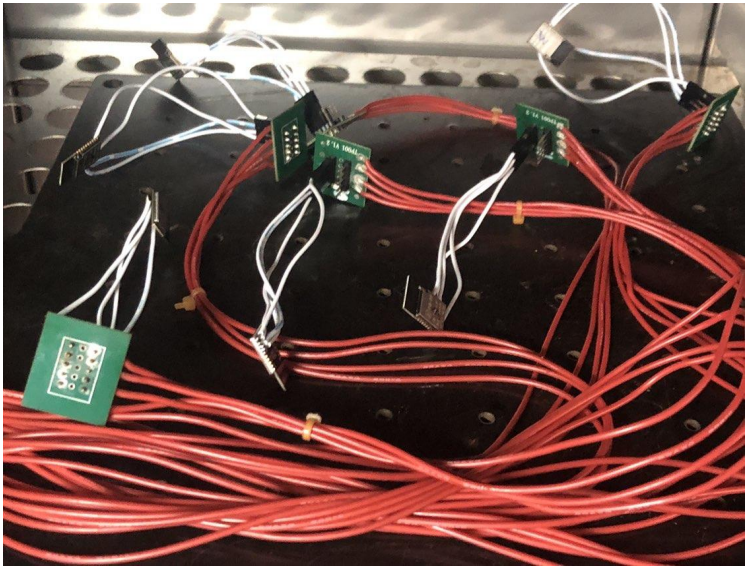
## 1. Inspection Standard

No.	Process Name	Inspection Item	Inspection Equipment	Sampling Level (Refer to GB/T 2828.1-2012)	Acceptable Quality Level		
					CR (Critical Defect)	MA (Major Defect)	MI (Minor Defect)
1	Reliability test	High/low temperature storage; high/room/low temperature power on/off; high/low temperature operation; alternating hot and humid; thermal shock	Constant temperature and humidity chamber	Normal single sampling, special inspection S-1	0 accept, 1 reject		

## 2. Test Items

No.	Item	Test Conditions
1	Low temperature storage test	Test conditions: -40°C Test duration: 8h After an 8-hour soak at -40°C, perform a cold start test.
2	High temperature storage test	Test conditions: 100°C + 93% RH Test duration: 8h After restoring to 85°C and a 1-hour soak, perform a hot start test.
3	Low temperature operation test	Test conditions: -40°C Test duration: 24h
4	High temperature operation test	Test conditions: 85°C + 93% RH Test duration: 24h
5	AC power on/off test with temperature	A) Temperature: -40°C B) Temperature: 25°C + 93% RH C) Temperature: 85°C + 93% RH Cycle each condition 200 times, with 30s ON and 30s OFF
6	Alternating hot and humid test	A) Operate at 85°C + 93% RH for 4h; B) Operate at 25°C + 93% RH for 4h; Cycle steps A and B for a total of 2 cycles.
7	Thermal shock test	Test conditions: -40°C–100°C + 93% RH, soak for 30min at each temperature Temperature transition time: 50min for heating, 2h for cooling. Test duration: 5 cycles

### 3. Test Preparation


No.	Item	Image/Attachment
1	Reliability documentation	Refer to the TB-05 module reliability documentation
2	Test equipment	
3	Sample placement	
4	Test reason	Customer requests to conduct the reliability test

## 4. Low Temperature Storage Test

**Test Conditions:** Power-off test. Store the product at -40°C for 8h, then perform a cold start test.

**Test Profile:**

Is Power Off —  
Is Power On —

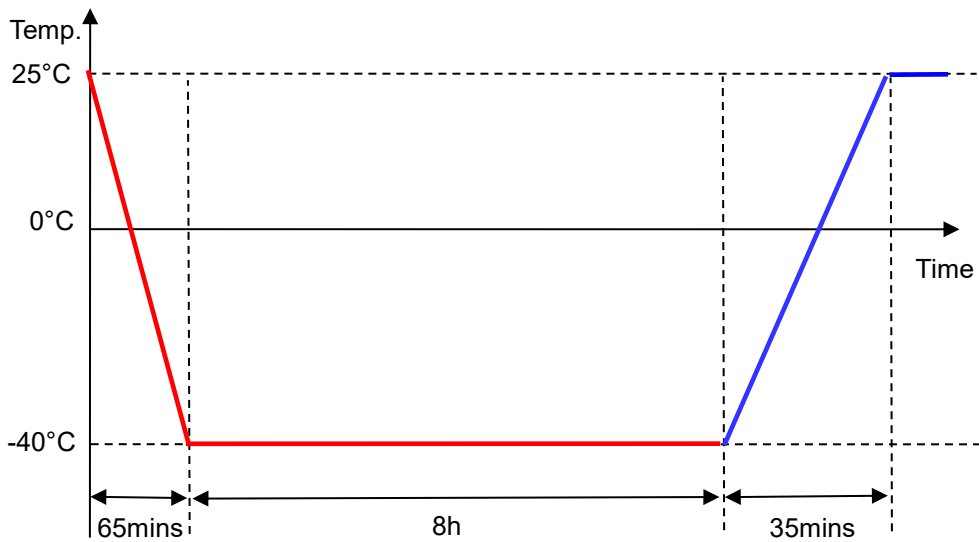

**Test Criteria:**

1. During cold start, the module functions properly. If the BLE debugging assistant can successfully search for the module's Bluetooth, the module is considered to be functional.
2. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.


Sample Quantity	Test Data	Test Results
6PCS	<p>The screenshot shows a 'Scanner' app interface with a 'Stop Scanning' button at the top right. Below the title, it says 'Filtering Active (6 / 12)'. There are six device entries, each with a Bluetooth icon, a MAC address, a signal strength indicator, and a 'Connect' button. The devices are: SGBP-604CB074 (-54 dBm, 501.24 ms), SGBP-604CB06E (-56 dBm, 500.27 ms), SGBP-604CAF0F (-54 dBm, 499.78 ms), SGBP-604CB06F (-61 dBm, -1.0 ms), SGBP-604CB04B (-60 dBm, -1.0 ms), and SGBP-604CAF0B (-65 dBm, -1.0 ms). At the bottom, there are navigation icons for Scanner, RSSI Graph, Advertiser, and Settings.</p>	PASS

### 5. High Temperature Storage Test

**Test Conditions:** Power-off test. Store the product at 100°C + 93% RH for 8h, then restore it to 85°C + 93% RH for a 1-hour soak, and perform a hot start test.

**Test Profile:**

Is Power Off —  
 Is Power On —

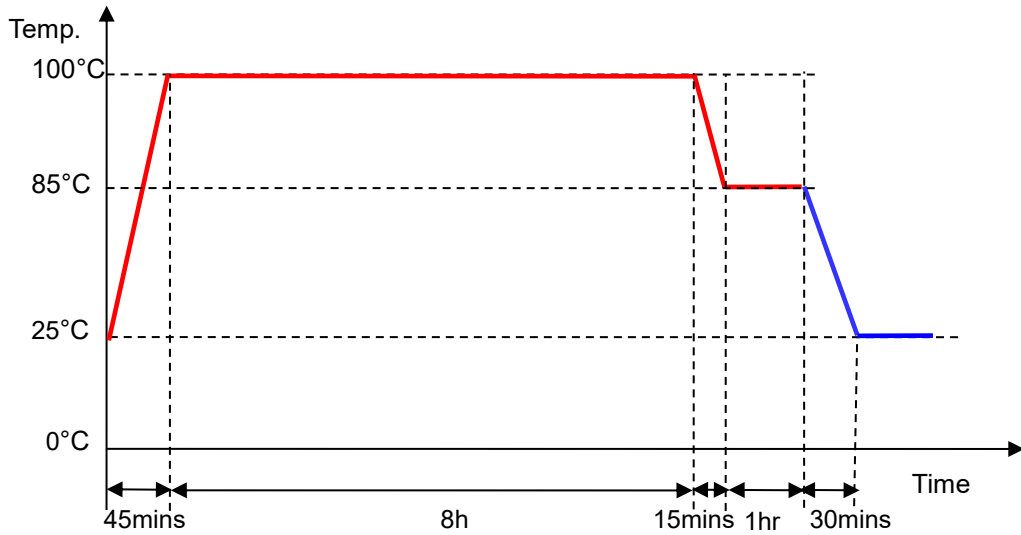

**Test Criteria:**

1. During hot start, the module functions properly. If the BLE debugging assistant can successfully search for the module's Bluetooth, the module is considered to be functional.
2. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.


Sample Quantity	Test Data	Test Results																					
6PC	<p>The screenshot shows a Bluetooth scanner interface with the following data:</p> <table border="1"> <thead> <tr> <th>MAC Address</th> <th>Signal Strength</th> <th>Latency</th> </tr> </thead> <tbody> <tr> <td>SGBP-604CB074</td> <td>-54 dBm</td> <td>501.24 ms</td> </tr> <tr> <td>SGBP-604CB06E</td> <td>-56 dBm</td> <td>500.27 ms</td> </tr> <tr> <td>SGBP-604CAF0F</td> <td>-54 dBm</td> <td>499.78 ms</td> </tr> <tr> <td>SGBP-604CB06F</td> <td>-61 dBm</td> <td>-1.0 ms</td> </tr> <tr> <td>SGBP-604CB04B</td> <td>-60 dBm</td> <td>-1.0 ms</td> </tr> <tr> <td>SGBP-604CAF0B</td> <td>-65 dBm</td> <td>-1.0 ms</td> </tr> </tbody> </table>	MAC Address	Signal Strength	Latency	SGBP-604CB074	-54 dBm	501.24 ms	SGBP-604CB06E	-56 dBm	500.27 ms	SGBP-604CAF0F	-54 dBm	499.78 ms	SGBP-604CB06F	-61 dBm	-1.0 ms	SGBP-604CB04B	-60 dBm	-1.0 ms	SGBP-604CAF0B	-65 dBm	-1.0 ms	PASS
MAC Address	Signal Strength	Latency																					
SGBP-604CB074	-54 dBm	501.24 ms																					
SGBP-604CB06E	-56 dBm	500.27 ms																					
SGBP-604CAF0F	-54 dBm	499.78 ms																					
SGBP-604CB06F	-61 dBm	-1.0 ms																					
SGBP-604CB04B	-60 dBm	-1.0 ms																					
SGBP-604CAF0B	-65 dBm	-1.0 ms																					

## 6. Low Temperature Operation Test

**Test Conditions:** Power-on test. Operate at -40°C for 24h.

**Test Profile:**

**Is Power Off** ——— (red line)  
**Is Power On** ——— (blue line)

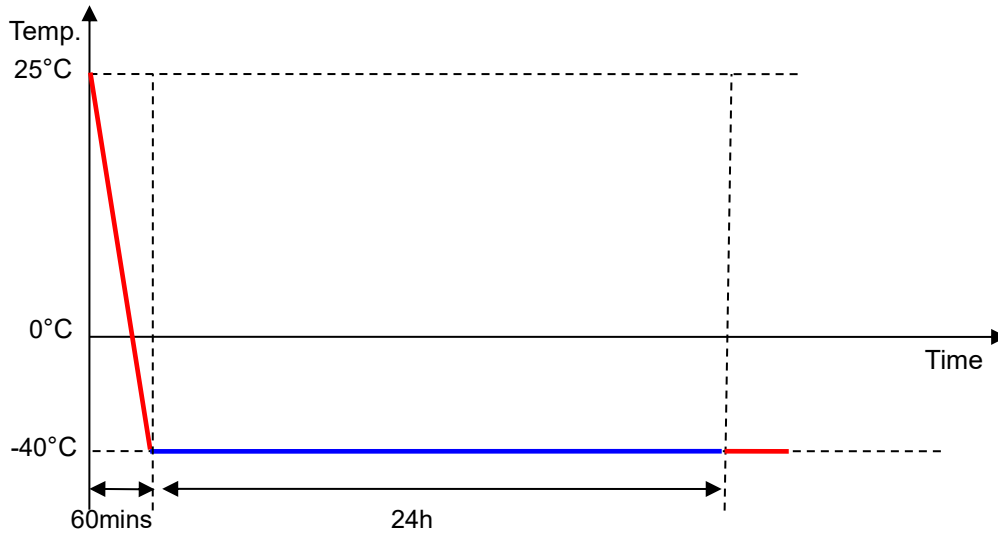

**Test Criteria:**

1. If the BLE debugging assistant can successfully search for the module’s Bluetooth during the test, the module is considered to be functional.
2. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.

Sample Quantity	Test Data	Test Results
6PCS	<p>The screenshot shows a 'Scanner' app interface with a 'Stop Scanning' button at the top. Below the title, it indicates 'Filtering Active (6 / 15)'. There are seven device entries, each with a Bluetooth icon, a MAC address, a signal strength indicator, and a connection time. The devices listed are: SGBP-604CAF0B, SGBP-604CB06E, SGBP-604CAF0F, SGBP-604CB04B, SGBP-604CB06F, and SGBP-604CB074. Each entry has a 'Connect' button next to it. The bottom navigation bar includes 'Scanner', 'RSSI Graph', 'Advertiser', and 'Settings'.</p>	PASS


## 7. High Temperature Operation Test

**Test Conditions:** Operate at 85°C+ 93% RH for 24h.

**Test Profile:**

**Is Power Off** —

**Is Power On** —

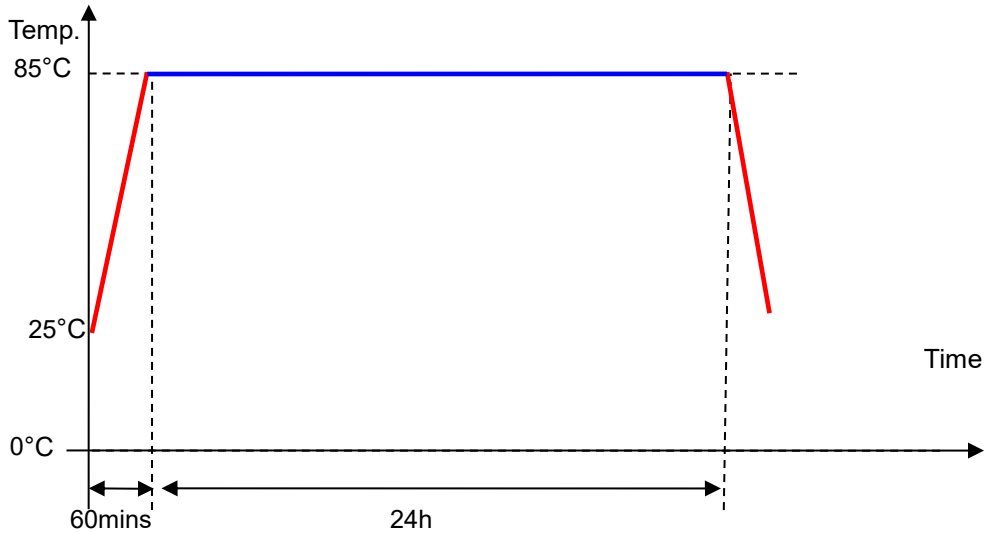

### Test Criteria:


1. If the BLE debugging assistant can successfully search for the module's Bluetooth during the test, the module is considered to be functional.
2. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.

Sample Quantity	Test Data	Test Results
6PCS	<p>The screenshot shows a mobile application interface titled "Scanner" with a "Stop Scanning" button. It displays "Filtering Active (6 / 7)". Below are six device entries, each with a Bluetooth icon, a MAC address, a signal strength indicator, and a "Connect" button. The devices are: SGBP-604CB04B (-56 dBm, 501.66 ms), SGBP-604CAF0F (-54 dBm, -1.0 ms), SGBP-604CB06E (-64 dBm, -1.0 ms), SGBP-604CAF0B (-68 dBm, -1.0 ms), SGBP-604CB074 (-60 dBm, -1.0 ms), and SGBP-604CB06F (-48 dBm, -1.0 ms). The bottom navigation bar includes "Scanner", "RSSI Graph", "Advertiser", and "Settings".</p>	PASS

## 8. AC Power On/Off Test with Temperature

- Test Conditions:**
1. Power on: 30s; power off: 30s.
  2. Temperature: -40°C, 25°C + 93% RH, 85°C + 93% RH.
  3. Cycle: Each test condition cycles 200 times.

**Test Profile:**

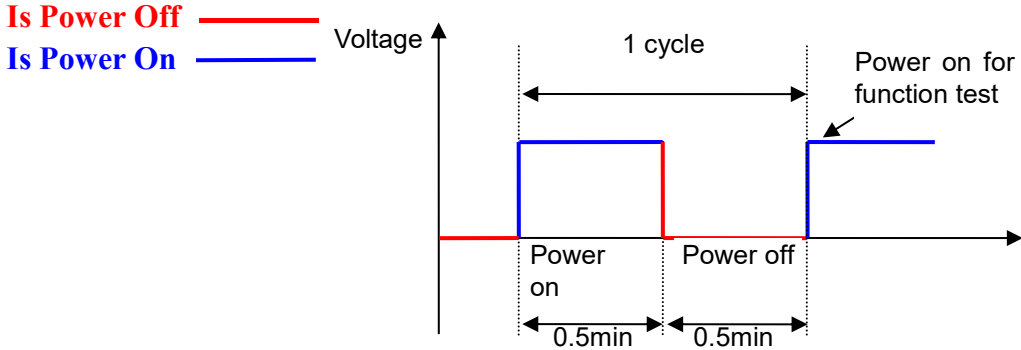

**Test Criteria:**

1. If the BLE debugging assistant can successfully search for the module's Bluetooth after power-on, the module is considered to be functional.
2. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.

Item	Sample Quantity	Test Data	Test Results
Power on/off at room temperature	6PCS		PASS
Power on/off at low temperature	6PCS		PASS
Power on/off at high temperature	6PCS		PASS


## 9. Alternating Hot and Humid Test

**Test Conditions:**

1. Operate at 85°C + 93% RH for 4h;
  2. Operate at 25°C + 93% RH for 4h;
- Cycle step 1 and step 2, a total of 2 cycles.


**Test Profile:**

**Is Power Off** ——— (Red line)  
**Is Power On** ——— (Blue line)

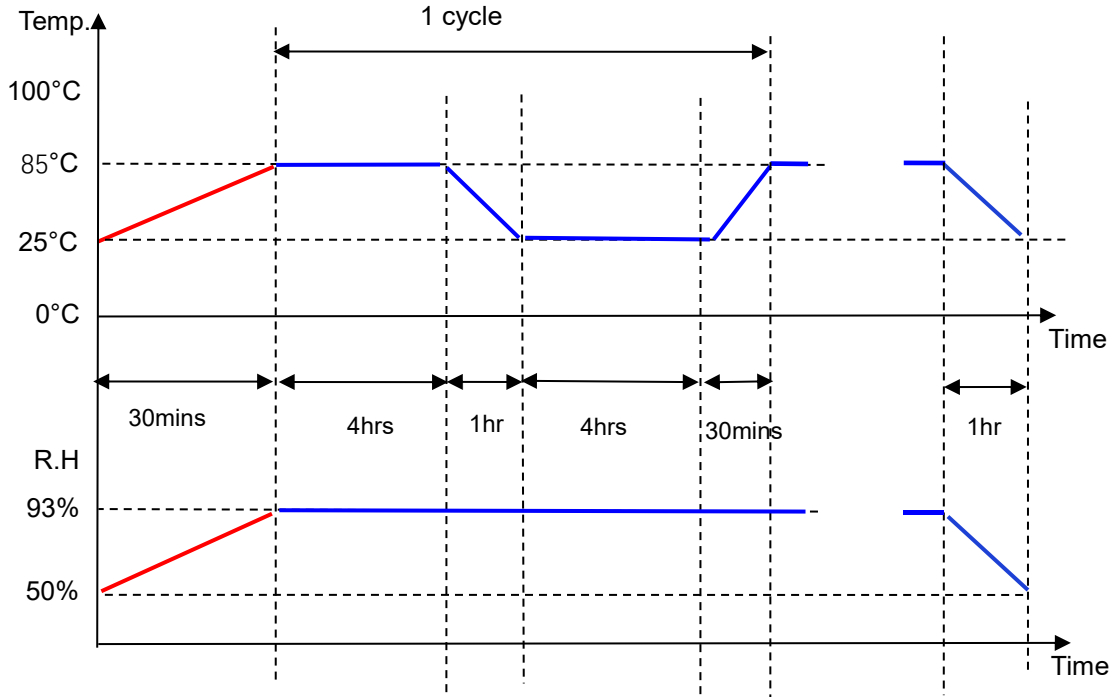

**Test Criteria:**

1. If the BLE debugging assistant can successfully search for the module’s Bluetooth during the test, the module is considered to be functional.
2. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.

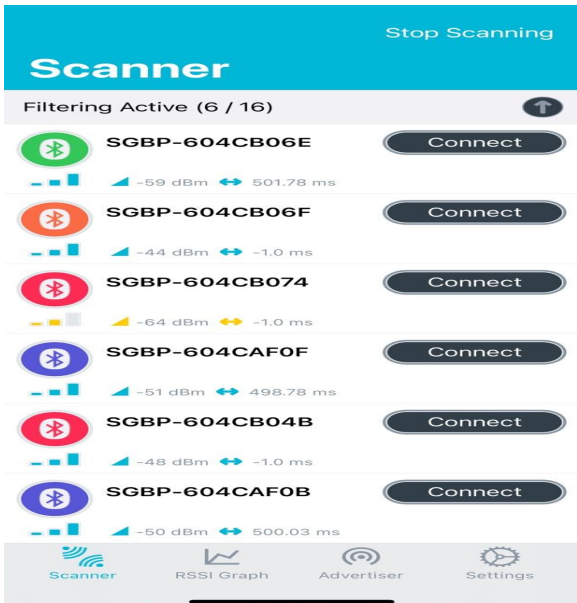
Sample Quantity	Test Data	Test Results
6PCS		PASS

# 10. Thermal Shock Test

## Test Conditions:

Power-off test. Temperature cycling between -40-100°C + 93% RH, with a heating time of 50min and a cooling time of 2h. Each stage is held for 30min, for a total of 5 cycles.

## Test Profile:

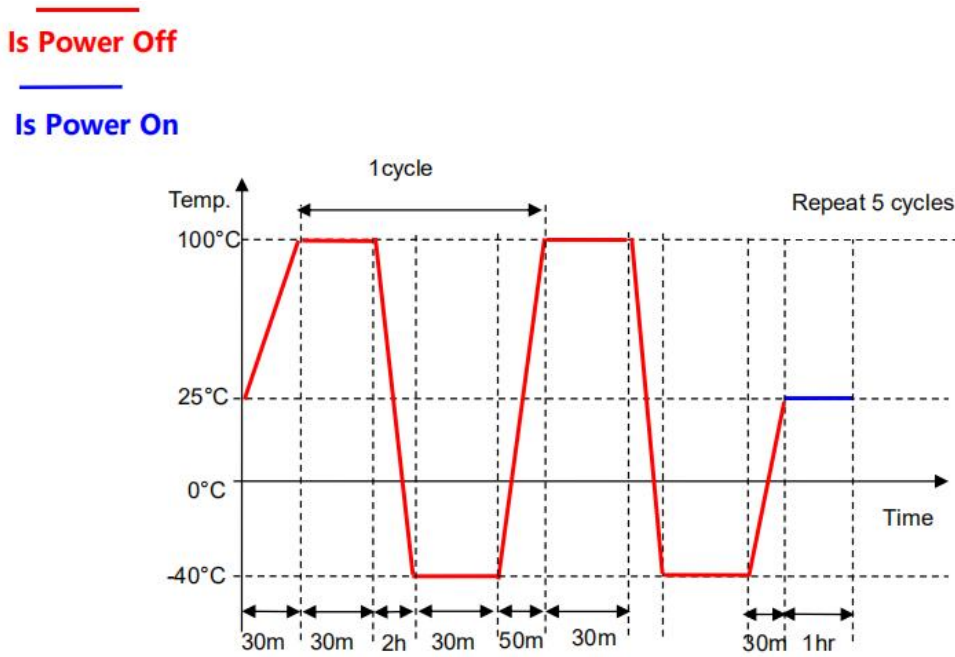

## Test Criteria:

1. If the BLE debugging assistant can successfully search for the module's Bluetooth after power-on, the module is considered to be functional.
2. After the test, the product shows no visible damage such as shrinkage, peeling, or discoloration.

Sample Quantity	Test Data	Test Results																					
6PCS	<p>The screenshot shows a Bluetooth scanner interface with the following data:</p> <table border="1"> <thead> <tr> <th>MAC Address</th> <th>Signal Strength</th> <th>Latency</th> </tr> </thead> <tbody> <tr> <td>SGBP-604CB06E</td> <td>-58 dBm</td> <td>-1.0 ms</td> </tr> <tr> <td>SGBP-604CAF0F</td> <td>-56 dBm</td> <td>-1.0 ms</td> </tr> <tr> <td>SGBP-604CB04B</td> <td>-55 dBm</td> <td>-1.0 ms</td> </tr> <tr> <td>SGBP-604CB074</td> <td>-54 dBm</td> <td>-1.0 ms</td> </tr> <tr> <td>SGBP-604CAF0B</td> <td>-50 dBm</td> <td>-1.0 ms</td> </tr> <tr> <td>SGBP-604CB06F</td> <td>-56 dBm</td> <td>-1.0 ms</td> </tr> </tbody> </table>	MAC Address	Signal Strength	Latency	SGBP-604CB06E	-58 dBm	-1.0 ms	SGBP-604CAF0F	-56 dBm	-1.0 ms	SGBP-604CB04B	-55 dBm	-1.0 ms	SGBP-604CB074	-54 dBm	-1.0 ms	SGBP-604CAF0B	-50 dBm	-1.0 ms	SGBP-604CB06F	-56 dBm	-1.0 ms	PASS
MAC Address	Signal Strength	Latency																					
SGBP-604CB06E	-58 dBm	-1.0 ms																					
SGBP-604CAF0F	-56 dBm	-1.0 ms																					
SGBP-604CB04B	-55 dBm	-1.0 ms																					
SGBP-604CB074	-54 dBm	-1.0 ms																					
SGBP-604CAF0B	-50 dBm	-1.0 ms																					
SGBP-604CB06F	-56 dBm	-1.0 ms																					