

Ra-08H-Kit Specification

Version V1.2.1

Copyright ©2026

Copyright © 2026 Shenzhen Ai-Thinker Technology Co., Ltd All Rights Reserved.

Document Revision History

Version	Date	Created / Revised Content	Prepared by	Approved by
V1.2.0	2022-03-02	First edition	Li Xiaocheng	Xu Hong
V1.2.1	2026-09-16	Modified certain content and the RGB LED descriptions; updated the warm/cool LED markings on the schematic	Liu Hong'en	Xu Hong

Copyright © 2026 Shenzhen Ai-Thinker Technology Co., Ltd All Rights Reserved.

Contents

1. Product Overview 4
1.1. Features 5
2. Key Specifications 6
2.1. Power Supply Selection 6
2.2. Electrostatic Requirements 7
2.3. Electrical Characteristics 7
2.4. Digital I/O Characteristics 8
2.5. RF Specifications 8
3. Appearance and Dimensions 9
4. LED and Button Description 10
5. Pin Definition 11
6. Schematic 13
7. Related Product Models 14
8. Packaging Information 15
9. Contact Us 15
Disclaimer and Copyright Notice 16
Notice 16

Copyright © 2026 Shenzhen Ai-Thinker Technology Co., Ltd All Rights Reserved.

1. Product Overview

The Ra-08H-Kit is a LoRaWAN development board designed and developed by Shenzhen Ai-Thinker Technology Co., Ltd. The board is equipped with a LoRa module and exposes serial interfaces and peripheral header pins. With the factory firmware, LoRaWAN transmission and reception can be easily controlled by sending commands through a serial terminal.

The ASR6601 chip used on the development board is a general-purpose LPWAN wireless communication SoC integrating an RF transceiver, a modem, and a 32-bit RISC MCU. The MCU uses an ARM core and operates at a frequency of up to 48MHz. The Ra-08H module supports LoRa modulation and legacy (G)FSK modulation for LPWAN applications. The transmitter also supports BPSK and (G)MSK modulation, while the receiver supports (G)MSK modulation.

The Ra-08H module on the development board provides ultra-long-range, ultra-low-power communication for LPWAN applications. It can be widely used in smart meters, supply chain and logistics, home and building automation, security systems, remote irrigation systems, and other applications.

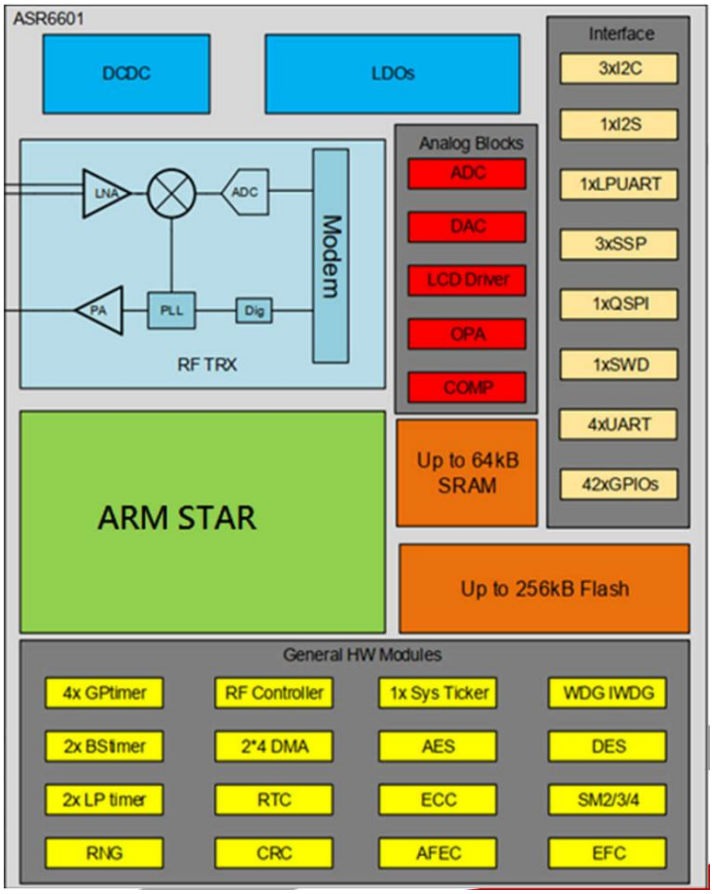


Figure 1 Main Chip Architecture Diagram

Copyright © 2026 Shenzhen Ai-Thinker Technology Co., Ltd All Rights Reserved.

1.1. Features

- Adopts DIP-30 package.
- Interface types: standard Micro-USB connector and pin headers with a 2.54mm pitch.
- Supported frequency band: 803–930MHz.
- Development board operating voltage: 3.3V or 5V; theoretical maximum transmit power: +22dBm.
- High sensitivity: -138dBm@125kHz SF12.
- Supported spreading factors: SF5, SF6, SF7, SF8, SF9, SF10, SF11, and SF12.
- Embedded memory: 128KB Flash and 16KB SRAM.
- Supports LoRa, (G)FSK, BPSK, and (G)MSK modulation.
- Supports multiple sleep modes, with deep-sleep current as low as 0.9μA.
- Supports an external antenna through an SMA connector.

Copyright © 2026 Shenzhen Ai-Thinker Technology Co., Ltd All Rights Reserved.

2. Key Specifications

Table 1 Key Specifications

Development Board Model	Ra-08H-Kit
Compatible Module	Ra-08H
Package	DIP-30
Dimensions	48.26×25.40 (±0.2)mm
Antenna Type	External antenna via SMA connector
Frequency Range	803–930MHz
Operating Temperature	-40–85℃
Storage Conditions	-40–125℃, <90% RH
Power Supply Range	Supply voltage: 3.3V or 5V; supply current >500mA
Supported Interfaces	UART/GPIO/ADC/DAC/I2C/I2S/SPI/PWM
Available I/Os	12
UART Baud Rate	Low-speed serial port, default 9600bps
Transmission Protocol	LoRaWAN, LinkWAN
SPI Flash	128KByte

2.1. Power Supply Selection

The Ra-08H-Kit supports three power supply modes:

- Micro-USB interface (default)
- 3V3 and GND pin header
- 5V and GND pin header

It is recommended to use the first power supply mode: power via the Micro-USB interface.

Copyright © 2026 Shenzhen Ai-Thinker Technology Co., Ltd All Rights Reserved.

2.2. Electrostatic Requirements

Ra-08H-Kit is an ESD-sensitive device and requires special precautions during handling.



Figure 2 ESD Protection Diagram

2.3. Electrical Characteristics

Table 2 Electrical Characteristics

Parameter	Name		Min	Typ	Max	Unit	Remarks
Operating Temperature	TOPR		-40	25	85	℃	Industrial-grade design
Supply Voltage (Micro-USB)	VCC		4.75	5	5.25	V	/
Supply Voltage (Pin Header)	VCC		2.7	3.3	3.6	V	≥ 3.3V ensures the output power
	VCC		4.5	5	5.3	V	≥ 5V ensures the output power
Power Consumption	Sleep Mode	Consumption 1	-	0.9	-	μA	0.9μA@without RF/MCU retention, without RTC
		Consumption 2	-	1.3	-	μA	1.3μA@with RF/MCU retention and RTC
	Standby Mode		-	3.83	-	mA	Power on
	Full-Load Mode (TX: 21dBm)		-	115	-	mA	DC-DC used, 21dBm
	Receive Mode (RX: SF10)		-	9.5	-	mA	DC-DC used

Copyright © 2026 Shenzhen Ai-Thinker Technology Co., Ltd All Rights Reserved.

2.4. Digital I/O Characteristics

Table 3 Digital I/O Characteristics

Description		Typ			Unit
Operating Frequency		803–930			MHz
Parameter	**Name**	**Min**	**Typ**	**Max**	**Unit**
I/O Level	VIO	2.7	3.3	3.6	V
Low-Level Input Voltage	VIL	-	-	0.2	V
High-Level Input Voltage	VIH	0.8	-	-	V
Low-Level Output Voltage	VOL	-	-	0.1	V
High-Level Output Voltage	VOH	0.9	-	-	V


2.5. RF Specifications

Table 4 RF Specifications

Output Power					
Mode	**Frequency Band**	**Min**	**Typ**	**Max**	**Unit**
TX Power	866MHz	-	21	-	dBm
TX Power	870MHz	-	21	-	dBm
TX Power	890MHz	-	21	-	dBm
TX Power	925MHz	-	21	-	dBm
Receiver Sensitivity (Modulation Bandwidth: 125kHz)					
Mode		**Min**	**Typ**	**Max**	**Unit**
SF7		-	-123	-	dBm
SF8		-	-126	-	dBm
SF9		-	-128	-	dBm
SF10		-	-131	-	dBm
SF11		-	-135	-	dBm
SF12		-	-138	-	dBm

Copyright © 2026 Shenzhen Ai-Thinker Technology Co., Ltd All Rights Reserved.

3. Appearance and Dimensions

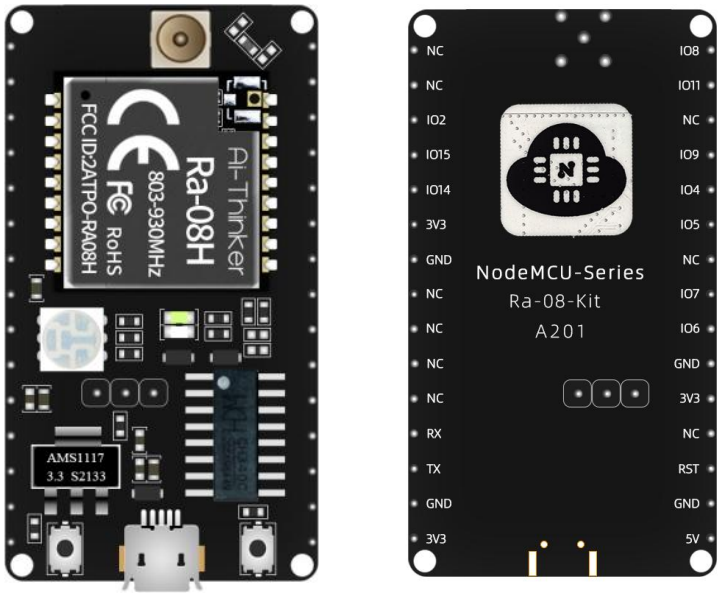

Top View Bottom View

Figure 3 Development Board Appearance
(Images and silkscreen markings are for reference only. The actual product shall prevail.)

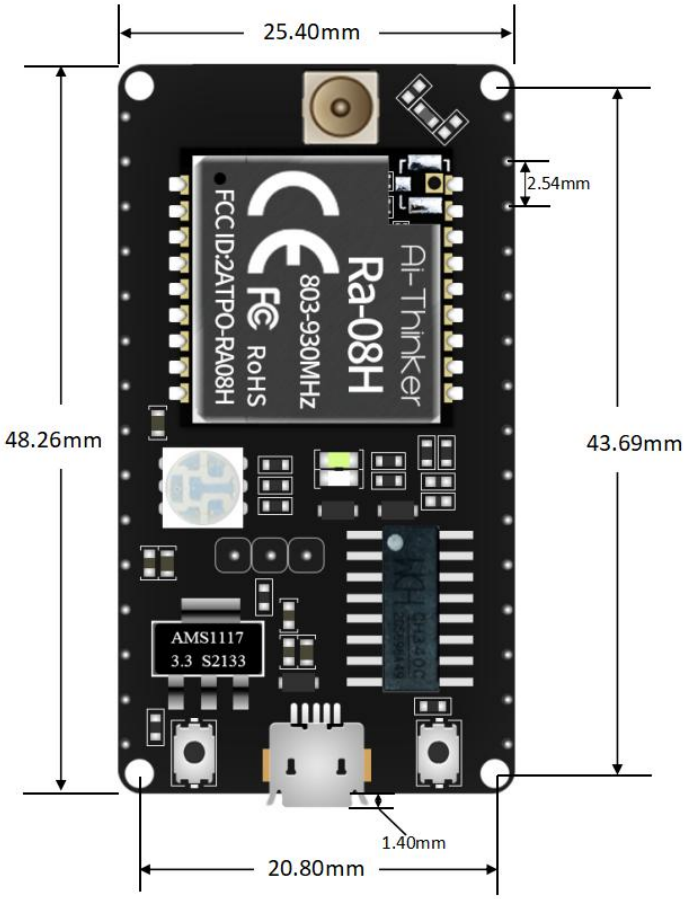


Figure 4 Development Board Dimensions

Copyright © 2026 Shenzhen Ai-Thinker Technology Co., Ltd All Rights Reserved.

4. LED and Button Description

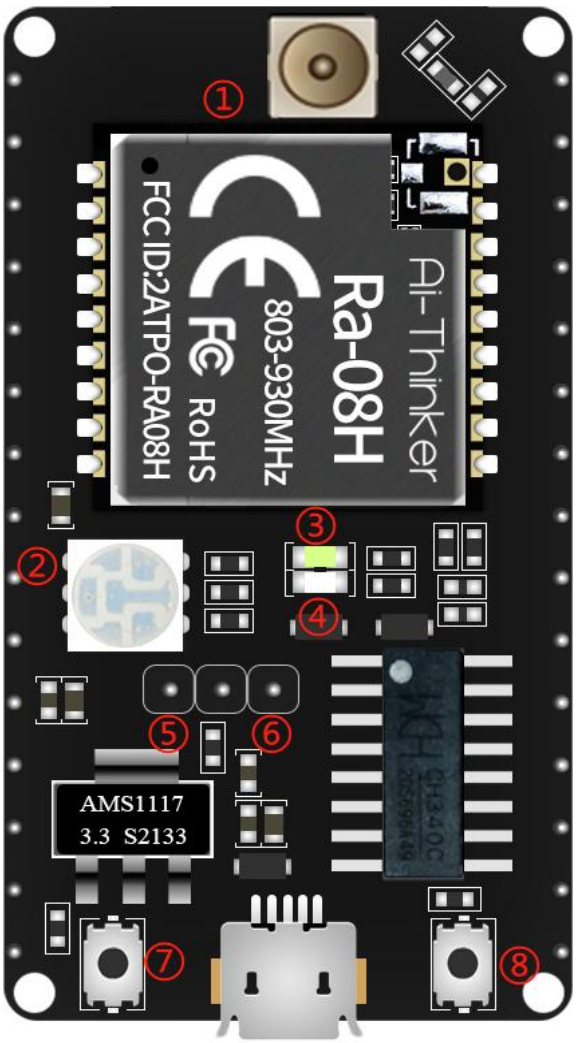


Figure 5 Ra-08H-Kit's LED and Button Location

Table 5 Ra-08H-Kit's LED and Button Function Description

No.	Function Description
①	SMA connector
②	RGB LED (the red LED is connected to IO7, the green LED is connected to IO4, and the blue LED is connected to IO5.)
③	Cool LED (IO14)
④	Warm LED (IO15)
⑤	Programming serial port
⑥	AT serial port
⑦	Reset button
⑧	Programming button

Copyright © 2026 Shenzhen Ai-Thinker Technology Co., Ltd All Rights Reserved.

5. Pin Definition

The Ra-08H-Kit exposes a total of 30 pins, as shown in the pin diagram. The pin function definition table provides the detailed interface specifications.



Figure 6 Development Board Pin Diagram (Bottom View)

Table 6 Pin Function Definitions

No.	Name	Function
1	IO8	GPIO8/ADC_IN1
2	IO11	GPIO11/ADC_IN0
3	NC	NC
4	IO9	GPIO9/DAC_OUT
5	IO4	GPIO4/SSP1_CLK
6	IO5	GPIO5/SSP1_NSS
7	NC	NC
8	IO7	GPIO7/SWD_CLK

Copyright © 2026 Shenzhen Ai-Thinker Technology Co., Ltd All Rights Reserved.

9	IO6	GPIO6/SWD_DATA
10	GND	Ground; connect to the power supply reference ground
11	3V3	3.3V power supply; recommended supply current >500mA
12	NC	NC
13	RST	RSTN_IN external reset
14	GND	Ground; connect to the power supply reference ground
15	5V	5V power supply; recommended supply current >500mA
16	3V3	3.3V power supply; recommended supply current >500mA
17	GND	Ground; connect to the power supply reference ground
18	TX	GPIO17/UART_TX
19	RX	GPIO60/LPUART_RX or GPIO16/UART_RX
20	NC	NC
21	NC	NC
22	NC	NC
23	NC	NC
24	GND	Ground; connect to the power supply reference ground
25	3V3	3.3V power supply; recommended supply current >500mA
26	IO14	GPIO14/I2C_SCL
27	IO15	GPIO15/I2C_SDA
28	IO2	GPIO2/BOOT
29	NC	NC
30	NC	NC

Table 7 Module Boot Modes

Pin	Default State	SPI Boot Mode	Download Boot Mode
IO2	Pull-Down	0	1

Note: Some pins have been pulled up internally, please refer to the schematic.

Copyright © 2026 Shenzhen Ai-Thinker Technology Co., Ltd All Rights Reserved.

6. Schematic

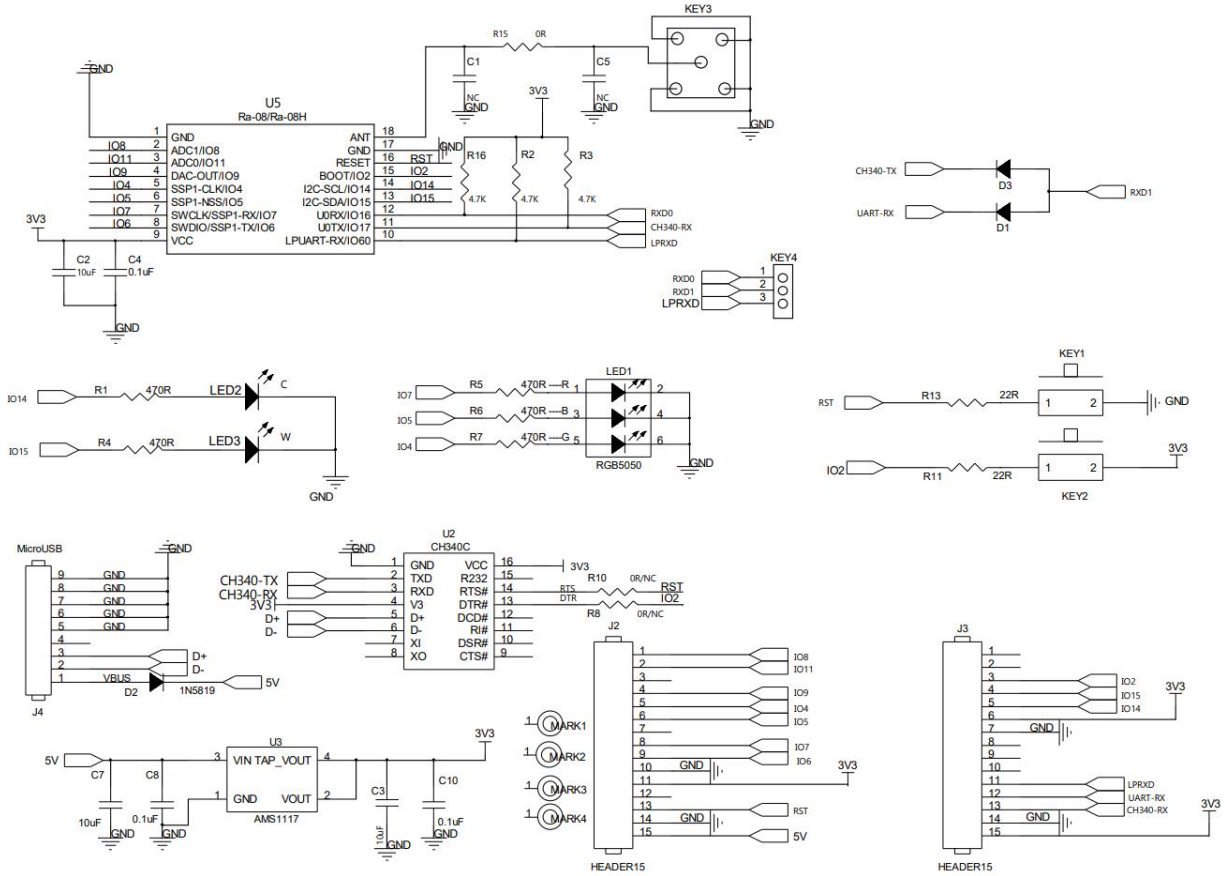


Figure 7 Development Board Schematic

Copyright © 2026 Shenzhen Ai-Thinker Technology Co., Ltd All Rights Reserved.

7. Related Product Models

Table 8 Related Product Models

Product Model	Frequency Band	Power Supply	Package	Dimensions	Antenna Interface
Ra-08	410–525 MHz	3.3V, I>500mA	SMD-18	16 × 16 (±0.2)mm	Castellated hole / through hole / IPEX connector
Ra-08H	803–930MHz	3.3V, I>500mA	SMD-18	16 × 16 (±0.2)mm	Castellated hole / through hole / IPEX connector
Ra-08-Kit	410–525MHz	5V, I>500mA	DIP-30	48.26 × 25.40 (±0.2)mm	SMA-K
Ra-08H-Kit	**803–930MHz**	**5V, I>500mA**	**DIP-30**	**48.26 × 25.40** (±0.2)mm	**SMA-K**
Product related information: https://docs.ai-thinker.com/lr					

Copyright © 2026 Shenzhen Ai-Thinker Technology Co., Ltd All Rights Reserved.

8. Packaging Information

Table 9 Packaging Information

Packing List	Packaging Method	Quantity per Bag (ESD Bag)	Quantity per Bag (Sealed Bag)
Ra-08H-Kit	Foam + ESD bag	1pcs	20pcs

9. Contact Us

Official Website Official Forum Development DOCS LinkedIn

Tmall Store Taobao Store Alibaba Store

Technical Support: support@aithinker.com

Domestic Business Cooperation: sales@aithinker.com

Overseas Business Cooperation: overseas@aithinker.com

Company Address: Room 403, 408–410, Building C, Huafeng Smart Innovation Port, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Contact Hotline: 0755-29162996

WeChat Mini Program

WeChat Official Account

Copyright © 2026 Shenzhen Ai-Thinker Technology Co., Ltd All Rights Reserved.

Disclaimer and Copyright Notice

The information in this document, including referenced URLs, is subject to change without notice.

The document is provided “as is” without warranty of any kind, express or implied, including but not limited to the warranties of merchantability, fitness for a particular purpose, or non-infringement. Furthermore, no warranty is given regarding proposals, specifications, or samples mentioned elsewhere. The publisher bears no responsibility, including for any infringement of patent rights arising from the use of information contained herein. This document does not grant, expressly or impliedly, by estoppel or otherwise, any license to intellectual property rights.

All test data presented herein are obtained from Ai-Thinker laboratories. Actual results may vary slightly.

All trade names, trademarks, and registered trademarks mentioned are the property of their respective owners.

Shenzhen Ai-Thinker Technology Co., Ltd. reserves the final right of interpretation of this document.

Notice

This manual may be updated due to product version upgrades or other reasons.

Shenzhen Ai-Thinker Technology Co., Ltd. reserves the right to modify the content of this manual without prior notice or announcement.

This manual is intended as a usage guide only. While Shenzhen Ai-Thinker Technology Co., Ltd. strives to provide accurate information, it does not guarantee that the content is entirely free of errors. All statements, information, and recommendations in this manual do not constitute any express or implied warranty.

Copyright © 2026 Shenzhen Ai-Thinker Technology Co., Ltd All Rights Reserved.